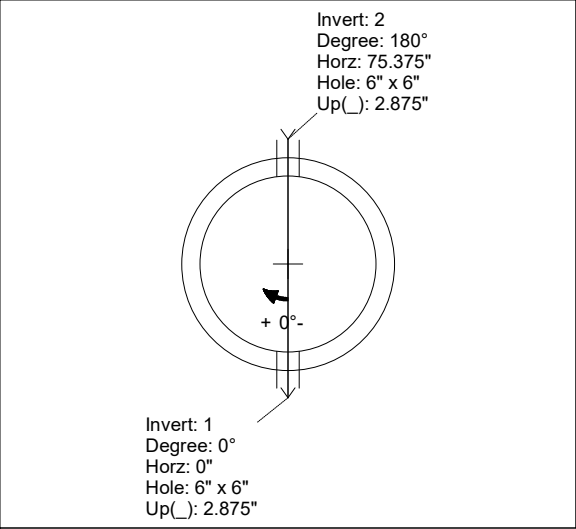


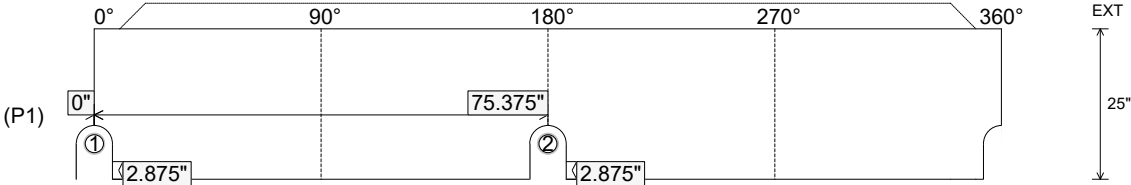


Job Name: 26-2756 - Lofts at Cadiz Job Location: Cadiz, KY 42241 Contractor: BTM Excavating, LLC				Plant: 100 9/15/2026 1:56:08 PM		Tech: Jared - F PC: T. Lewis					
Structure ID: QL31 SS-ARV											
P1 MH048DHVF				MH DH RISER Custom Ht T/F							
P3) 24" - CASTING HEIGHT - 7" P2) 48" - MH FLAT TOP w/ 24" ECC Hole F/G - 12" P1) 48" - MH DH RISER Custom Ht T/F - 25" 1) CASTING - HOE MC-315 F/C Sanitary 1) 48" - Conseal CS-102 1.00" (Double) 1) 24" - Conseal CS-102 1.00" (Double) 2) DOGHOUSE - 6"x6"				0 lb 1561 lb 1705 lb 258 lb 0 lb 0 lb 0 lb ----- Structure Total: 3524 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE MC-315 F/C SANITARY). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .12).					
Rim: 3.3' Rim to Invert: 3.3' Slack: 0" Sump: 4.4" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	0'	0°	0"	3" PVC SDR26	3.5"	DOGHOUSE 6"x6"	6" x 6"	6.016"	2.875"	0"	
Invert 2	0'	180°	91.125"	3" PVC SDR26	3.5"	DOGHOUSE 6"x6"	6" x 6"	6.016"	2.875"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimenions)    INSIDE WALL DIMENSIONS 											
Coating (Int): Coating (Ext):				Seam Up: Tongue Seam Dn: Flat		Wall Thickness: 5" Floor Height: 0"		Height (Int): 25" Height (Ext): 25"		Weight (Net): 1705 lb Volume (Net): 0.44cu.yd	