




Structure ID: 5 HW


P1 HWBW24F

24" - HW BW w/FLAT BOTTOM F/F


DIMENSIONS & QUANTITIES									
TYPE	PIPE Ø	A	B	C	D	E	F	G	WEIGHT
BW	24"	4'-0"	6'-0"	3'-8"	3'-0"	3'-0"	8"	6"	3,100 LBS.

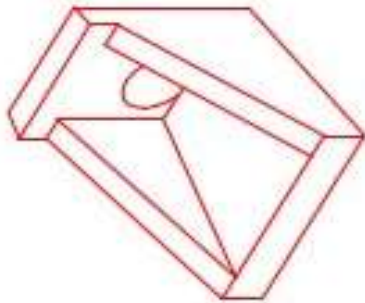


ISOMETRIC VIEW

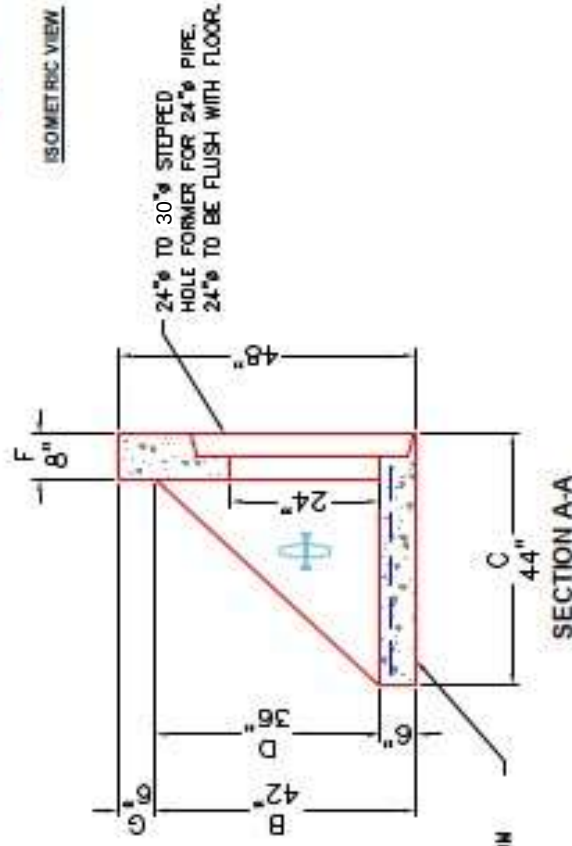

SECTION A-A

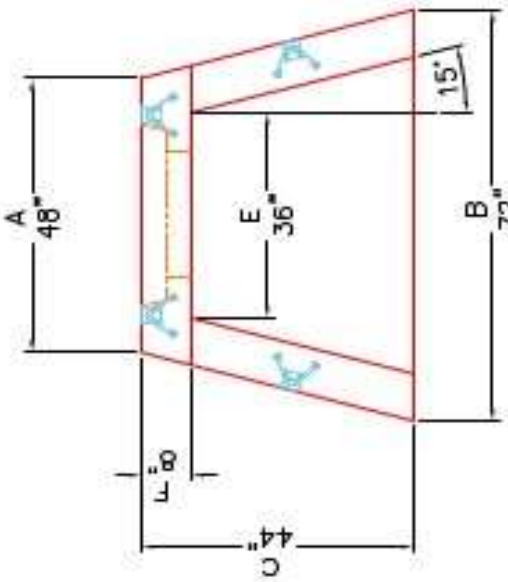

PLANVIEW

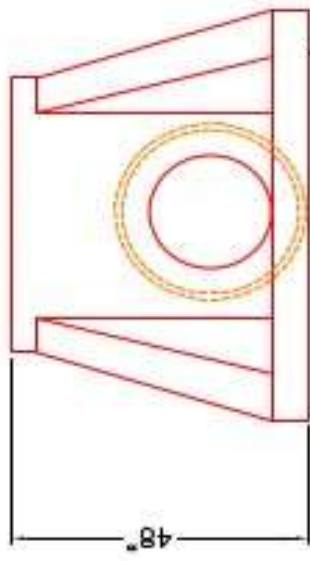

FRONT ELEVATION

NOTES:

1. CONCRETE: 4500 PSI AT 28 DAYS MIN. STRENGTH.
2. REINFORCING: #4 BAR @ 12" C/C E.W. - GRADE 60, (WITH 2" CONCRETE COVER MINIMUM)
3. REINFORCING BARS TO BE TACK WELDED OR TIED.

PRODUCTION WORK ORDER		PRODUCT I.D.: HWBW24F		DESCRIPTION: 24in BW HEADWALL FLAT BOTTOM	
 QUALITY CONTROL CHECKLIST ☐ ALL DIMENSIONS CORRECT. ☐ LIFTERS INSTALLED. ☐ STEPPED IF CORRECT SIZE. ☐ REINFORCING CORRECT. ☐ CLEARANCE ON REINFORCING CORRECT. ☐ EDGES CHAMFERED. ☐ ALL PATCHWORK ACCEPTABLE.	PRODUCT VIEW: RIGHT SIDE UP		CUSTOMER: STOCK		
	PLANT: BEAVER DAM, KY.		PROJECT: T.B.D.		
	WEIGHT: 3,475 LBS.		STRUCTURE ID.: T.B.D.		
	TOP SECTION JOINT: N/A		SALES ORDER NO: STOCK		
	BASE SECTION JOINT: N/A		CHECK: B. SMITH	DRAWING: J. HORSLEY	
	QC CHECK INITIALS:		DATE: 06/04/24	SCALE: NTS	PG. 1 of 1
	THIS DRAWING IS THE PROPERTY OF INFRASTRUCTURE PRECAST, INC. ANY USE OR DUPLICATION OF THIS DRAWING WITHOUT PRIOR AUTHORIZATION IS STRICTLY PROHIBITED.				

