




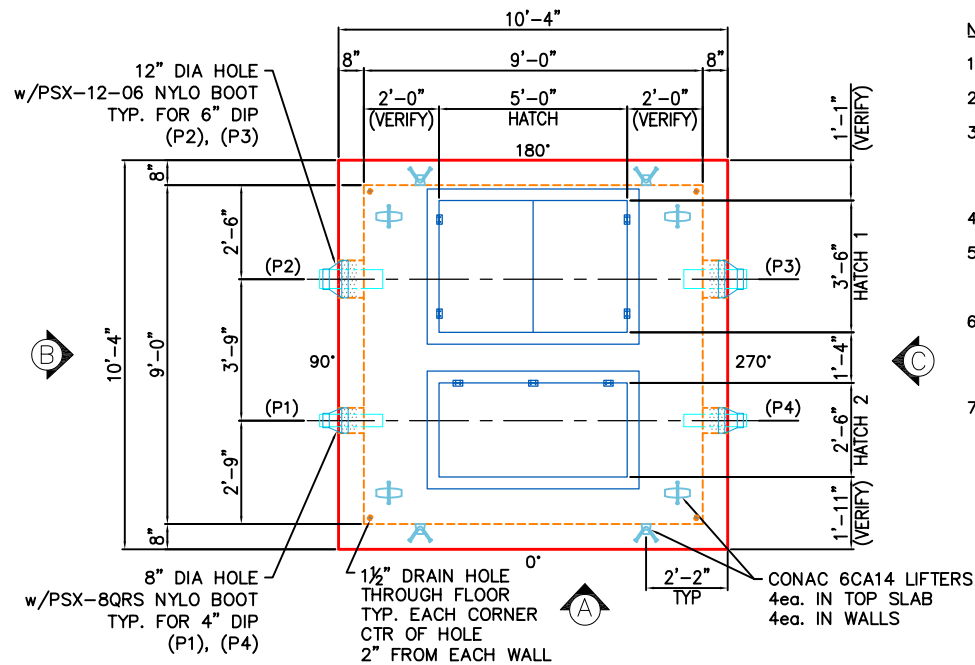


NOTES:

1. MANUFACTURED PER ASTM C913 SPECIFICATIONS.
2. CONCRETE = 5,000 PSI AT 28 DAYS.
3. REINFORCING PER ASTM A615 (GRADE 60).
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W
 - WALLS (As .47) #5 BARS AT 8" C.C.E.W.
 - WALLS (As .47) #5 BARS AT 8" C.C.E.W.
4. NO STEPS OR LADDER REQUIRED.
5. HATCHES SUPPLIED BY OTHERS:
HATCH 1 = HALLIDAY W1S 60"x30" WITH SKIRT FOR 10" SLAB.
HATCH 2 = HALLIDAY W2S 60"x42" WITH SKIRT FOR 10" SLAB.
6. WEIGHTS:
S2 TOP SLAB 9,337 LBS
S1 MONOBASE.....38,355 LBS
TOTAL WEIGHT: 47,692 LBS
7. VERIFY HATCH LOCATIONS.

(2) HATCHES SUPPLIED BY OTHERS
TO BE CAST INTO TOP SLAB
HALLIDAY W2S 60"x42" &
HALLIDAY W1S 60"x36"

PLAN VIEW

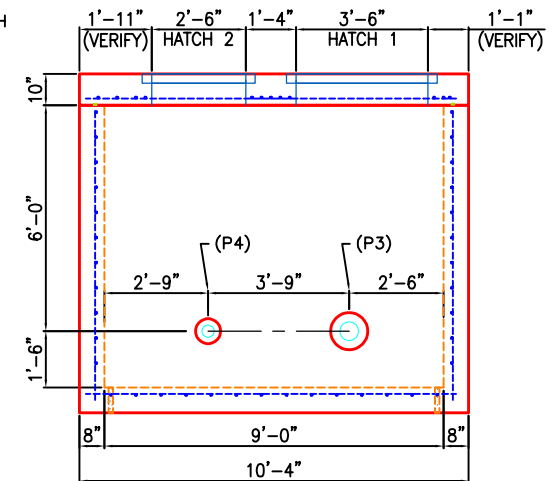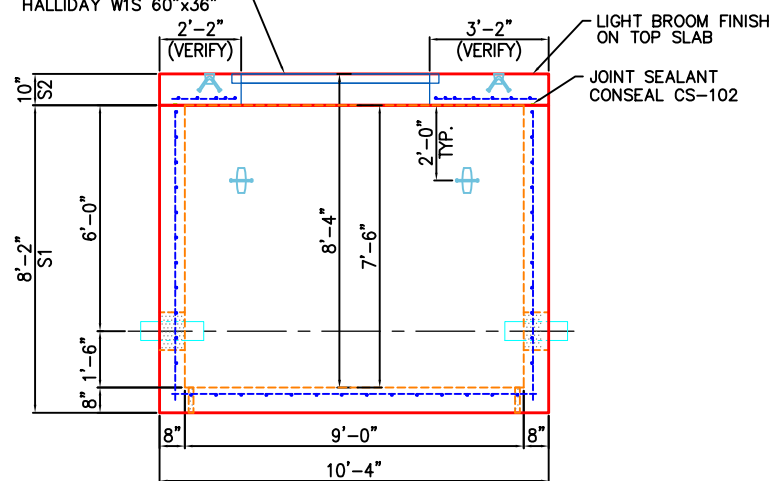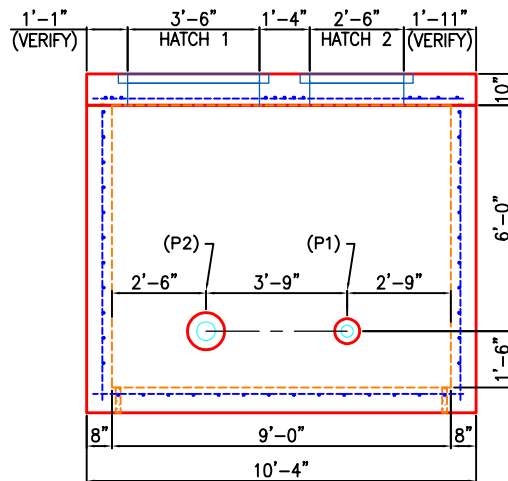

REVISION INFORMATION

REV. A ??/??/?? ?



SUBMITTAL DRAWING: 9'x9' METER VAULT

CUSTOMER: CORE & MAIN LP (MURFREESBORO)

PROJECT: FRANKLIN SENIOR LIVING VAULT

STRUCTURE: QL2 MV

SALES ORDER NO: 26-2773

CHECK: B. SMITH

DRAWN BY: J. HORSLEY

DATE: 06/30/26

SCALE: NTS

PG. 1 of 1