



Job Name: 26-2783 - Kentucky Livestock Innovation Center Job Location: Versailles, KY Contractor: Lagco Inc.				Plant: Beaver Dam 10/13/2026 12:56:56 PM		Tech: J. Coppage PC: M. Sullivan				
Structure ID: CI-4B										
P1 BX3636-08BAVF BOX BASE 8inW, 8inF, Variable Ht										
P3) 24" x 36" - CASTING HEIGHT - 6" P2) 36" x 36" - CB FLAT TOP CC 8"W w/24"x36" HOLE - 8" P1) 36" x 36" - BOX BASE 8inW, 8inF, Variable Ht - 41" 1) CASTING - HOE 525 LV SET (F/G/H) 1) 36" x 36" - SGL 1"x14.5' Butyl (2x) 1) Hole - 24 1) Hole - 14 1) Hole - 20 1) Hole - 6						0 lb 1235 lb 5990 lb 442 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 7667 lb		Structure Notes: 1. JR HOE HOE-525 LV SET PROVIDED BY ICAST 2. PER LEFUCG CBI TYPE D/ ASTM C913 SPEC'S. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (grade 60). - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.		
Rim: 853.6' Rim to Invert: 4.6' Slack: 0.2" Sump: 0" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset
Invert 1	849'	0°	26"	18" HDPE	21.2"	Hole 24	24"	24"	-1.6"	0"
Invert 2	849.1'	205°	29.297"	10" HDPE	11.4"	Hole 14	14"	15.447"	0.5"	-8"
Invert 3	849.1'	295°	29.297"	15" HDPE	17.6"	Hole 20	20"	22.068"	-0.1"	-8"
Invert 4	851.6'	0°	14"	4" HDPE (perf pipe)	4.8"	Hole 6	6"	6"	30.8"	-12"
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

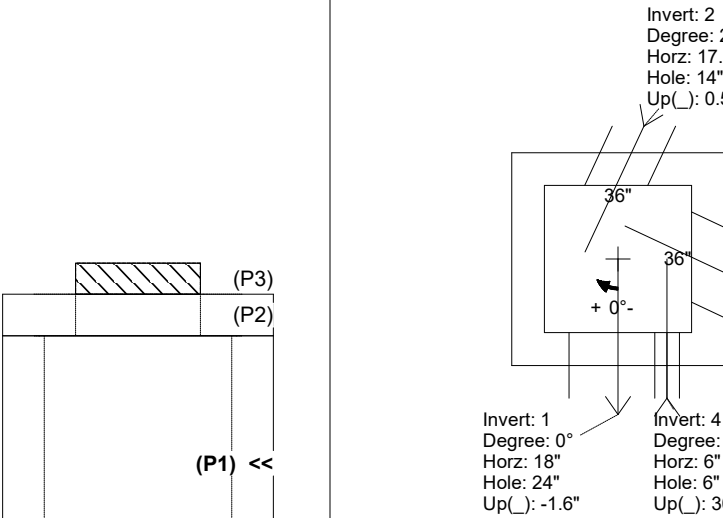

UPSIDE-DOWN VIEW (int. dimensions)

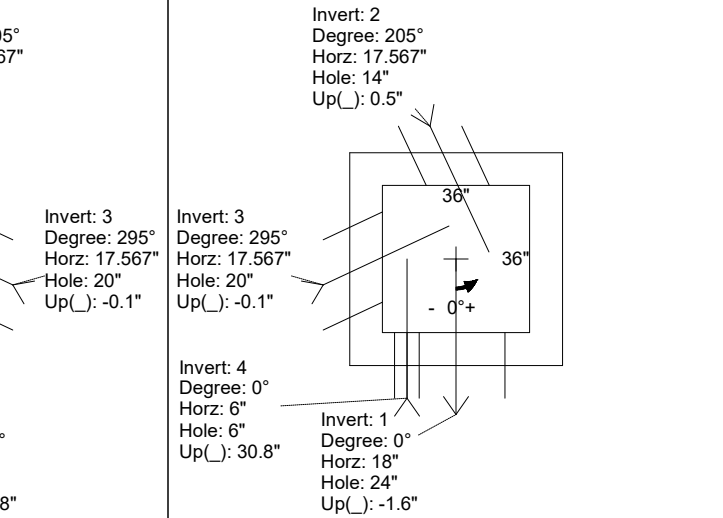

INSIDE WALL DIMENSIONS

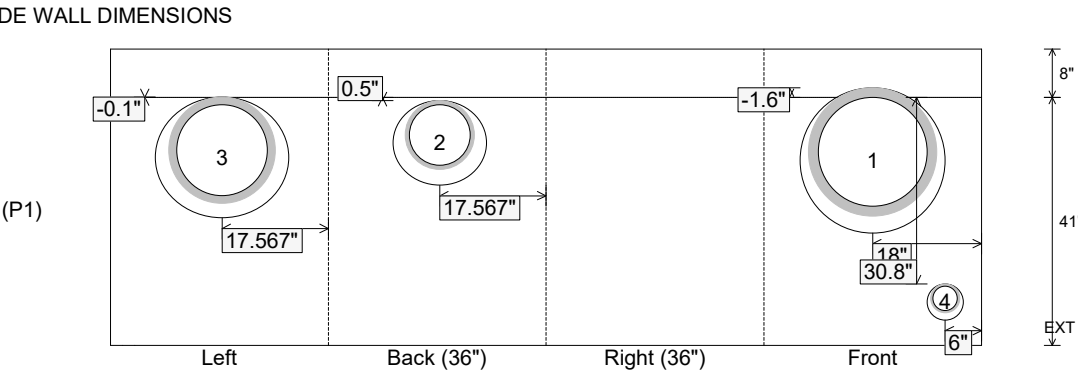

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 41" Height (Ext): 49"	Weight (Net): 5990 lb Volume (Net): 1.53cu.yd
----------------------------------	-------------------------------	--	--	--