




Job Name: 26-2783 - Kentucky Livestock Innovation Center Job Location: Versailles, KY Contractor: Lagco Inc.					Plant: Beaver Dam 10/13/2026 12:57:26 PM		Tech: J. Coppage PC: M. Sullivan				
Structure ID: CI-8A											
P1 MH048BAVF		MH BASE Custom Ht									
P3) 24" x 36" - CASTING HEIGHT - 6" P2) 48" - MH FLAT TOP w/24"x36" Hole - 7" P1) 48" - MH BASE Custom Ht - 59" 1) CASTING - HOE 525 LV SET (F/G/H) 1) 48" - Conseal CS-102 1.00" 1) 24" x 36" - Conseal CS-102 1.00" 2) Hole - 30 1) Hole - 6 5) MH Step ML-10-TDS-NCR - 10"					0 lb 1044 lb 4808 lb 442 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 6294 lb		Structure Notes: . 1. JR HOE HOE-525 LV SET PROVIDED BY ICAST 2. PER LEFUCG CBI TYPE D/ ASTM C478 SPEC'S. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (grade 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.				
Rim: 848'		Rim to Invert: 5.88'		Slack: 0.46"		Sump: 1.9"		Step Position: 283.5"			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	842.12'	0°	0"	24" HDPE	27.8"	Hole 30	30"	32.406"	0"	0"	
Invert 2	846.05'	100°	50.615"	4" HDPE (perf pipe)	4.8"	Hole 6	6"	6.016"	48.66"	0"	
Invert 3	842.22'	207°	104.772"	24" HDPE	27.8"	Hole 30	30"	32.406"	1.2"	0"	
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

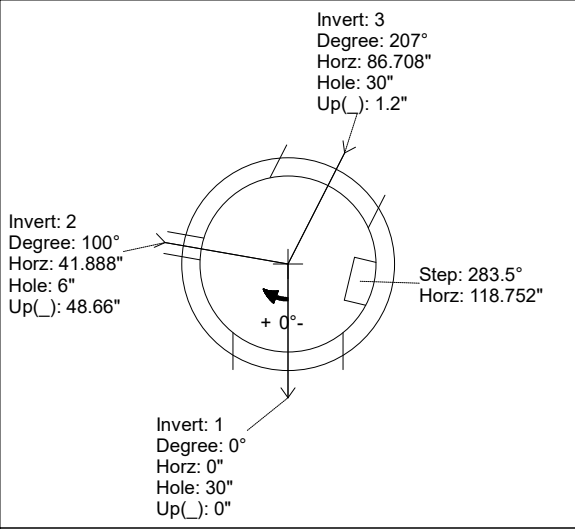

RIGHT-SIDE UP VIEW (int. dimensions)

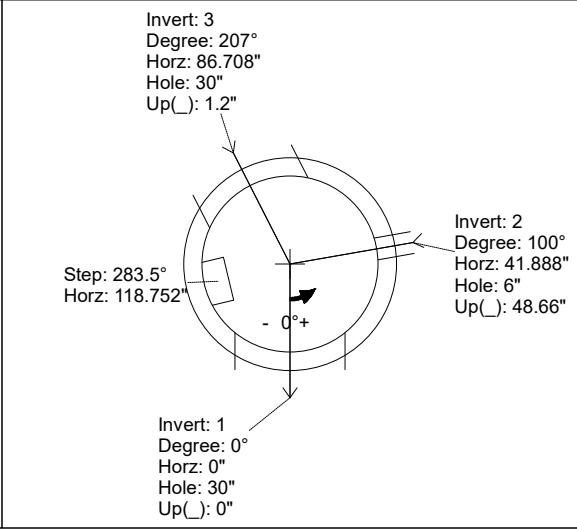

UPSIDE-DOWN VIEW (int. dimensions)

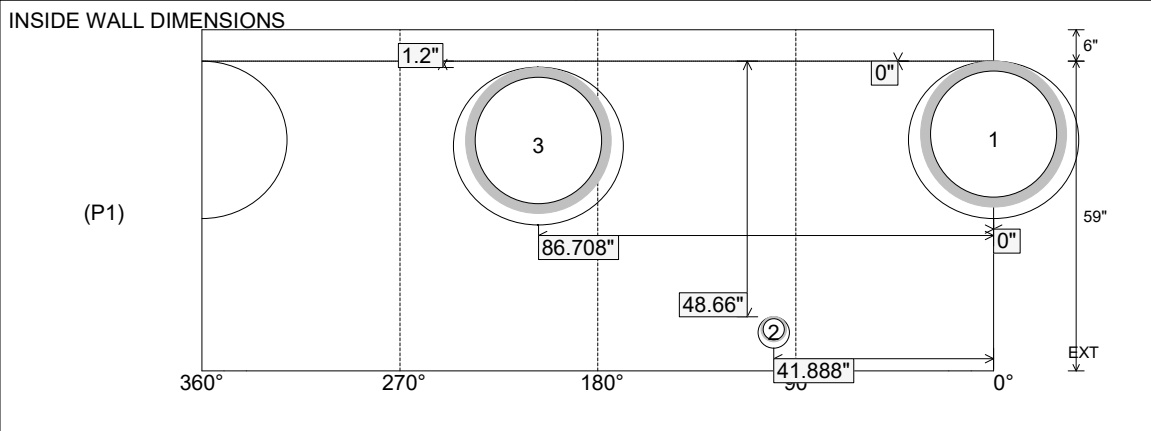

INSIDE WALL DIMENSIONS

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 59" Height (Ext): 65"	Weight (Net): 4808 lb Volume (Net): 1.23cu.yd
----------------------------------	-------------------------------	--	--	--