



Job Name: 26-2783 - Kentucky Livestock Innovation Center Job Location: Versailles, KY Contractor: Lagco Inc.					Plant: Beaver Dam 10/13/2026 1:00:25 PM		Tech: J. Coppage PC: M. Sullivan				
Structure ID: DI-1E OCS											
P1 BX3636-08BAVF BOX BASE 8inW, 8inF, Variable Ht											
P3) 36" x 36" - CASTING HEIGHT - 3" P2) 36" x 36" - BOX RISER 8inW, Variable Ht - 42" P1) 36" x 36" - BOX BASE 8inW, 8inF, Variable Ht - 29" 1) CASTING - TRASHRACKS LSQ-36 Sq. Top Mount Trash Rack 2) 36" x 36" - Conseal CS-102 1.00" 1) Hole - 16 1) Hole - 10 1) SQ. Hole - 12"x12"					0 lb 4866 lb 5054 lb 226 lb 0 lb 0 lb 0 lb 0 lb 0 lb Structure Total: 10145 lb		Structure Notes: 1. TRASHRACK LSQ-36-P PROVIDED BY ICAST. 2. PER ASTM C913 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W. 5. ORIFICE TRASHRACK TO BE SUPPLIED BY OTHERS				
Rim: 837' Rim to Invert: 6.2' Slack: 0.4" Sump: 0" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	830.8'	0°	26"	12" HDPE	14.5"	Hole 16	16"	16"	-1.25"	0"	
Invert 2	831.5'	180°	26"	6" HDPE (perf pipe)	6.9"	Hole 10	10"	10"	7.95"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											


RIGHT-SIDE UP VIEW (int. dimensions)

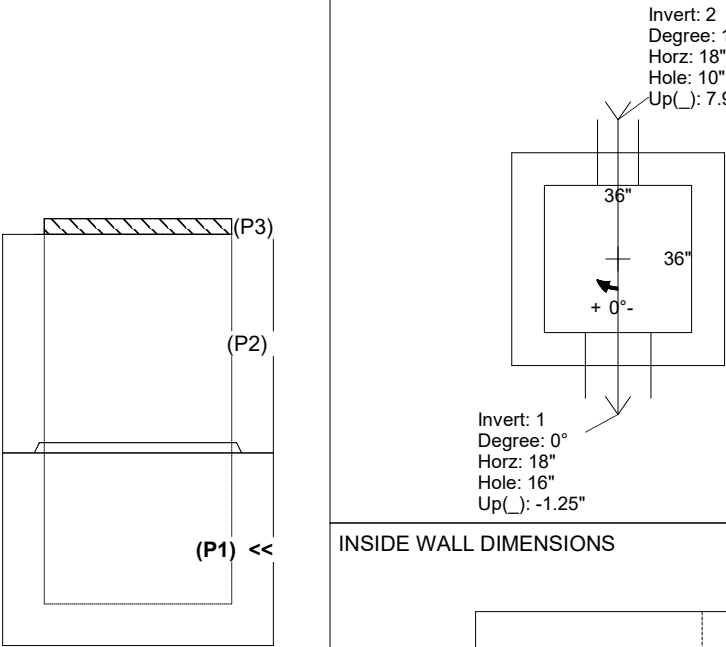

UPSIDE-DOWN VIEW (int. dimensions)

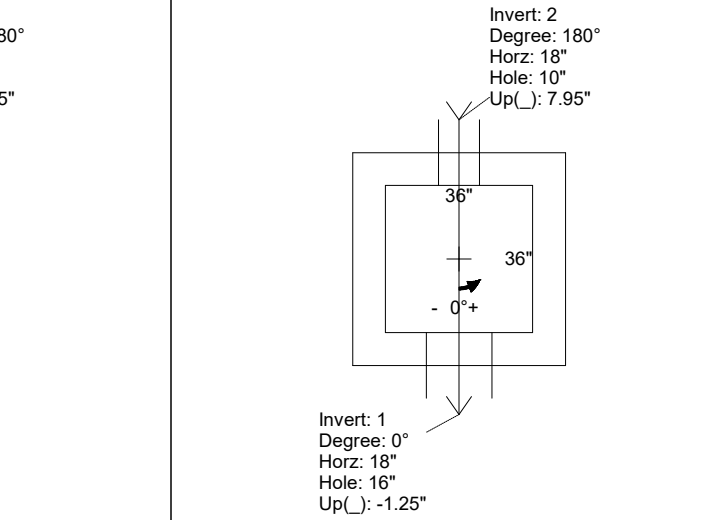

INSIDE WALL DIMENSIONS

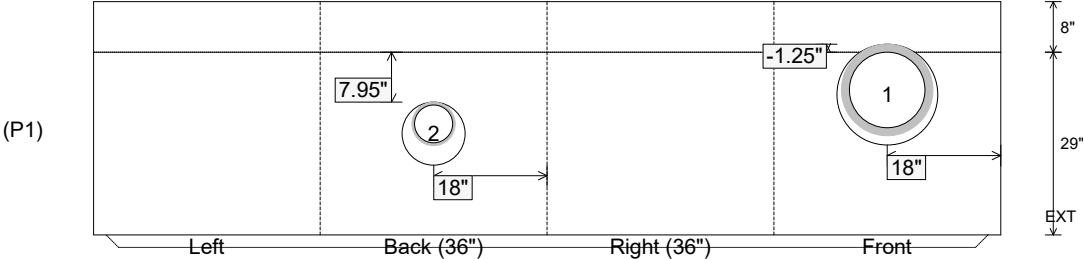

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 29" Height (Ext): 37"	Weight (Net): 5054 lb Volume (Net): 1.29cu.yd
----------------------------------	---------------------------------	--	--	--