




Floor (Bot): 850.283'  
Overall Height: 4.917'  
Slack: 0.6"



0 lb  
4752 lb  
182 lb  
0 lb  
0 lb  
0 lb  
0 lb

Structure Total: 4934 lb

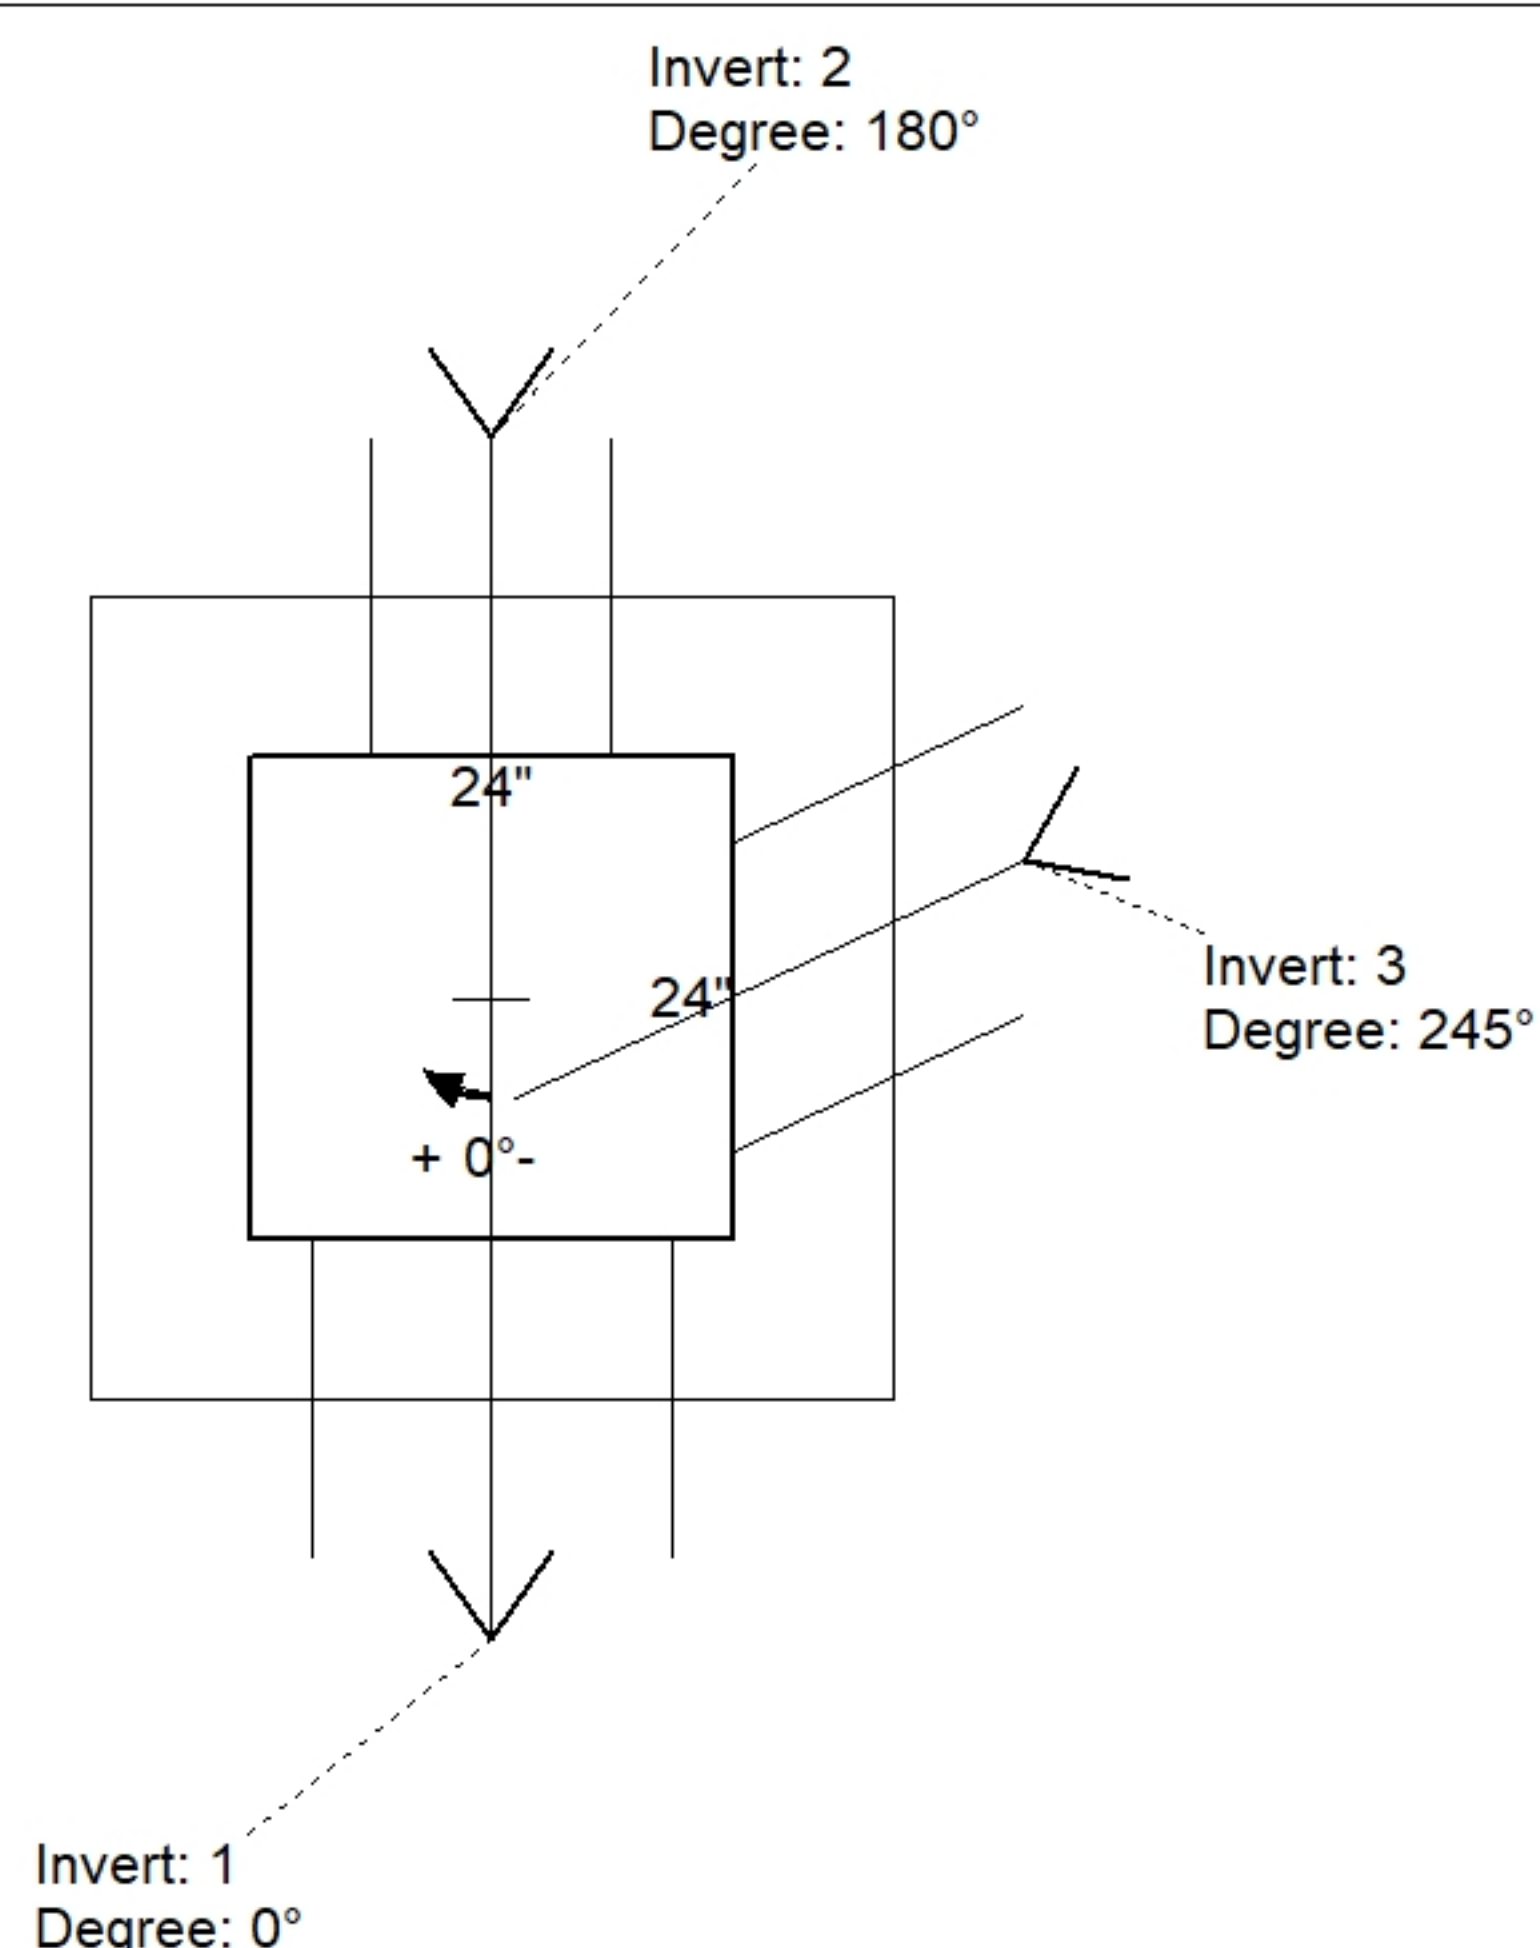

| Position | Elev    | Angle | Pipe     | Pipe OD | Hole | Connector | Up ( ) | Ref |
|----------|---------|-------|----------|---------|------|-----------|--------|-----|
| Rim      | 855.25' |       |          |         |      |           |        |     |
| Reducer  |         |       |          |         |      |           |        |     |
| Invert 1 | 850.95' | 0°    | 12" HDPE | 14.5"   | 18"  | Hole 18   | -1.25" | P1  |
| Invert 2 | 851.05' | 180°  | 8" HDPE  | 9.1"    | 12"  | Hole 12   | 0.65"  | P1  |
| Invert 3 | 851.05' | 245°  | 10" HDPE | 11.4"   | 14"  | Hole 14   | 0.5"   | P1  |
| Invert 4 |         |       |          |         |      |           |        |     |
| Invert 5 |         |       |          |         |      |           |        |     |
| Invert 6 |         |       |          |         |      |           |        |     |
| Invert 7 |         |       |          |         |      |           |        |     |
| Invert 8 |         |       |          |         |      |           |        |     |

### Default - Interior Dimensions

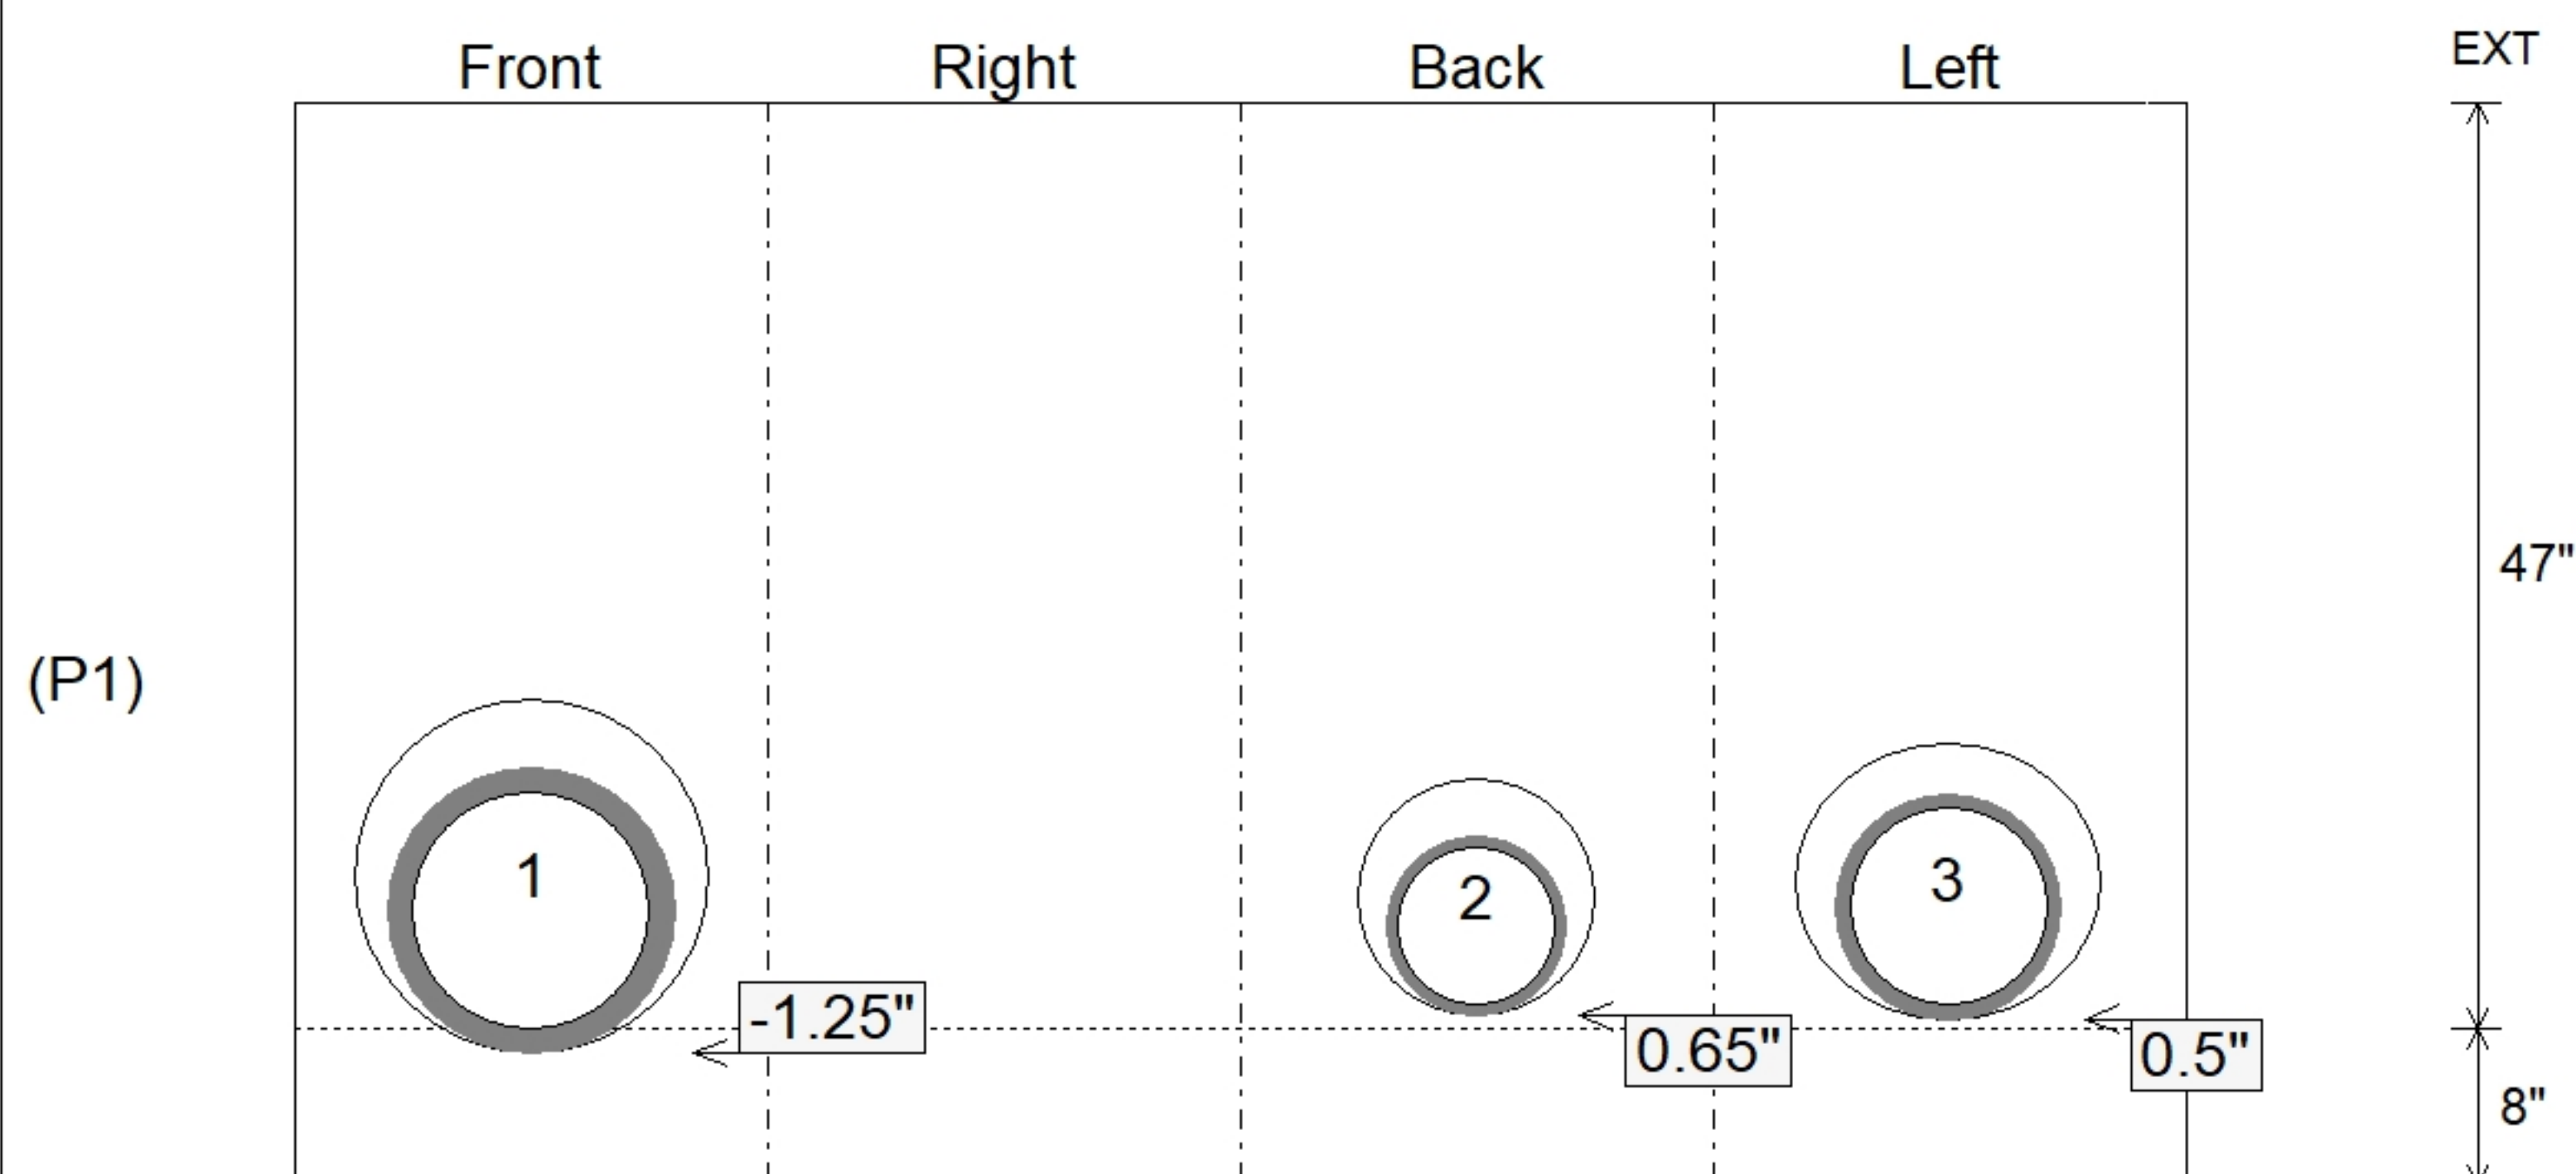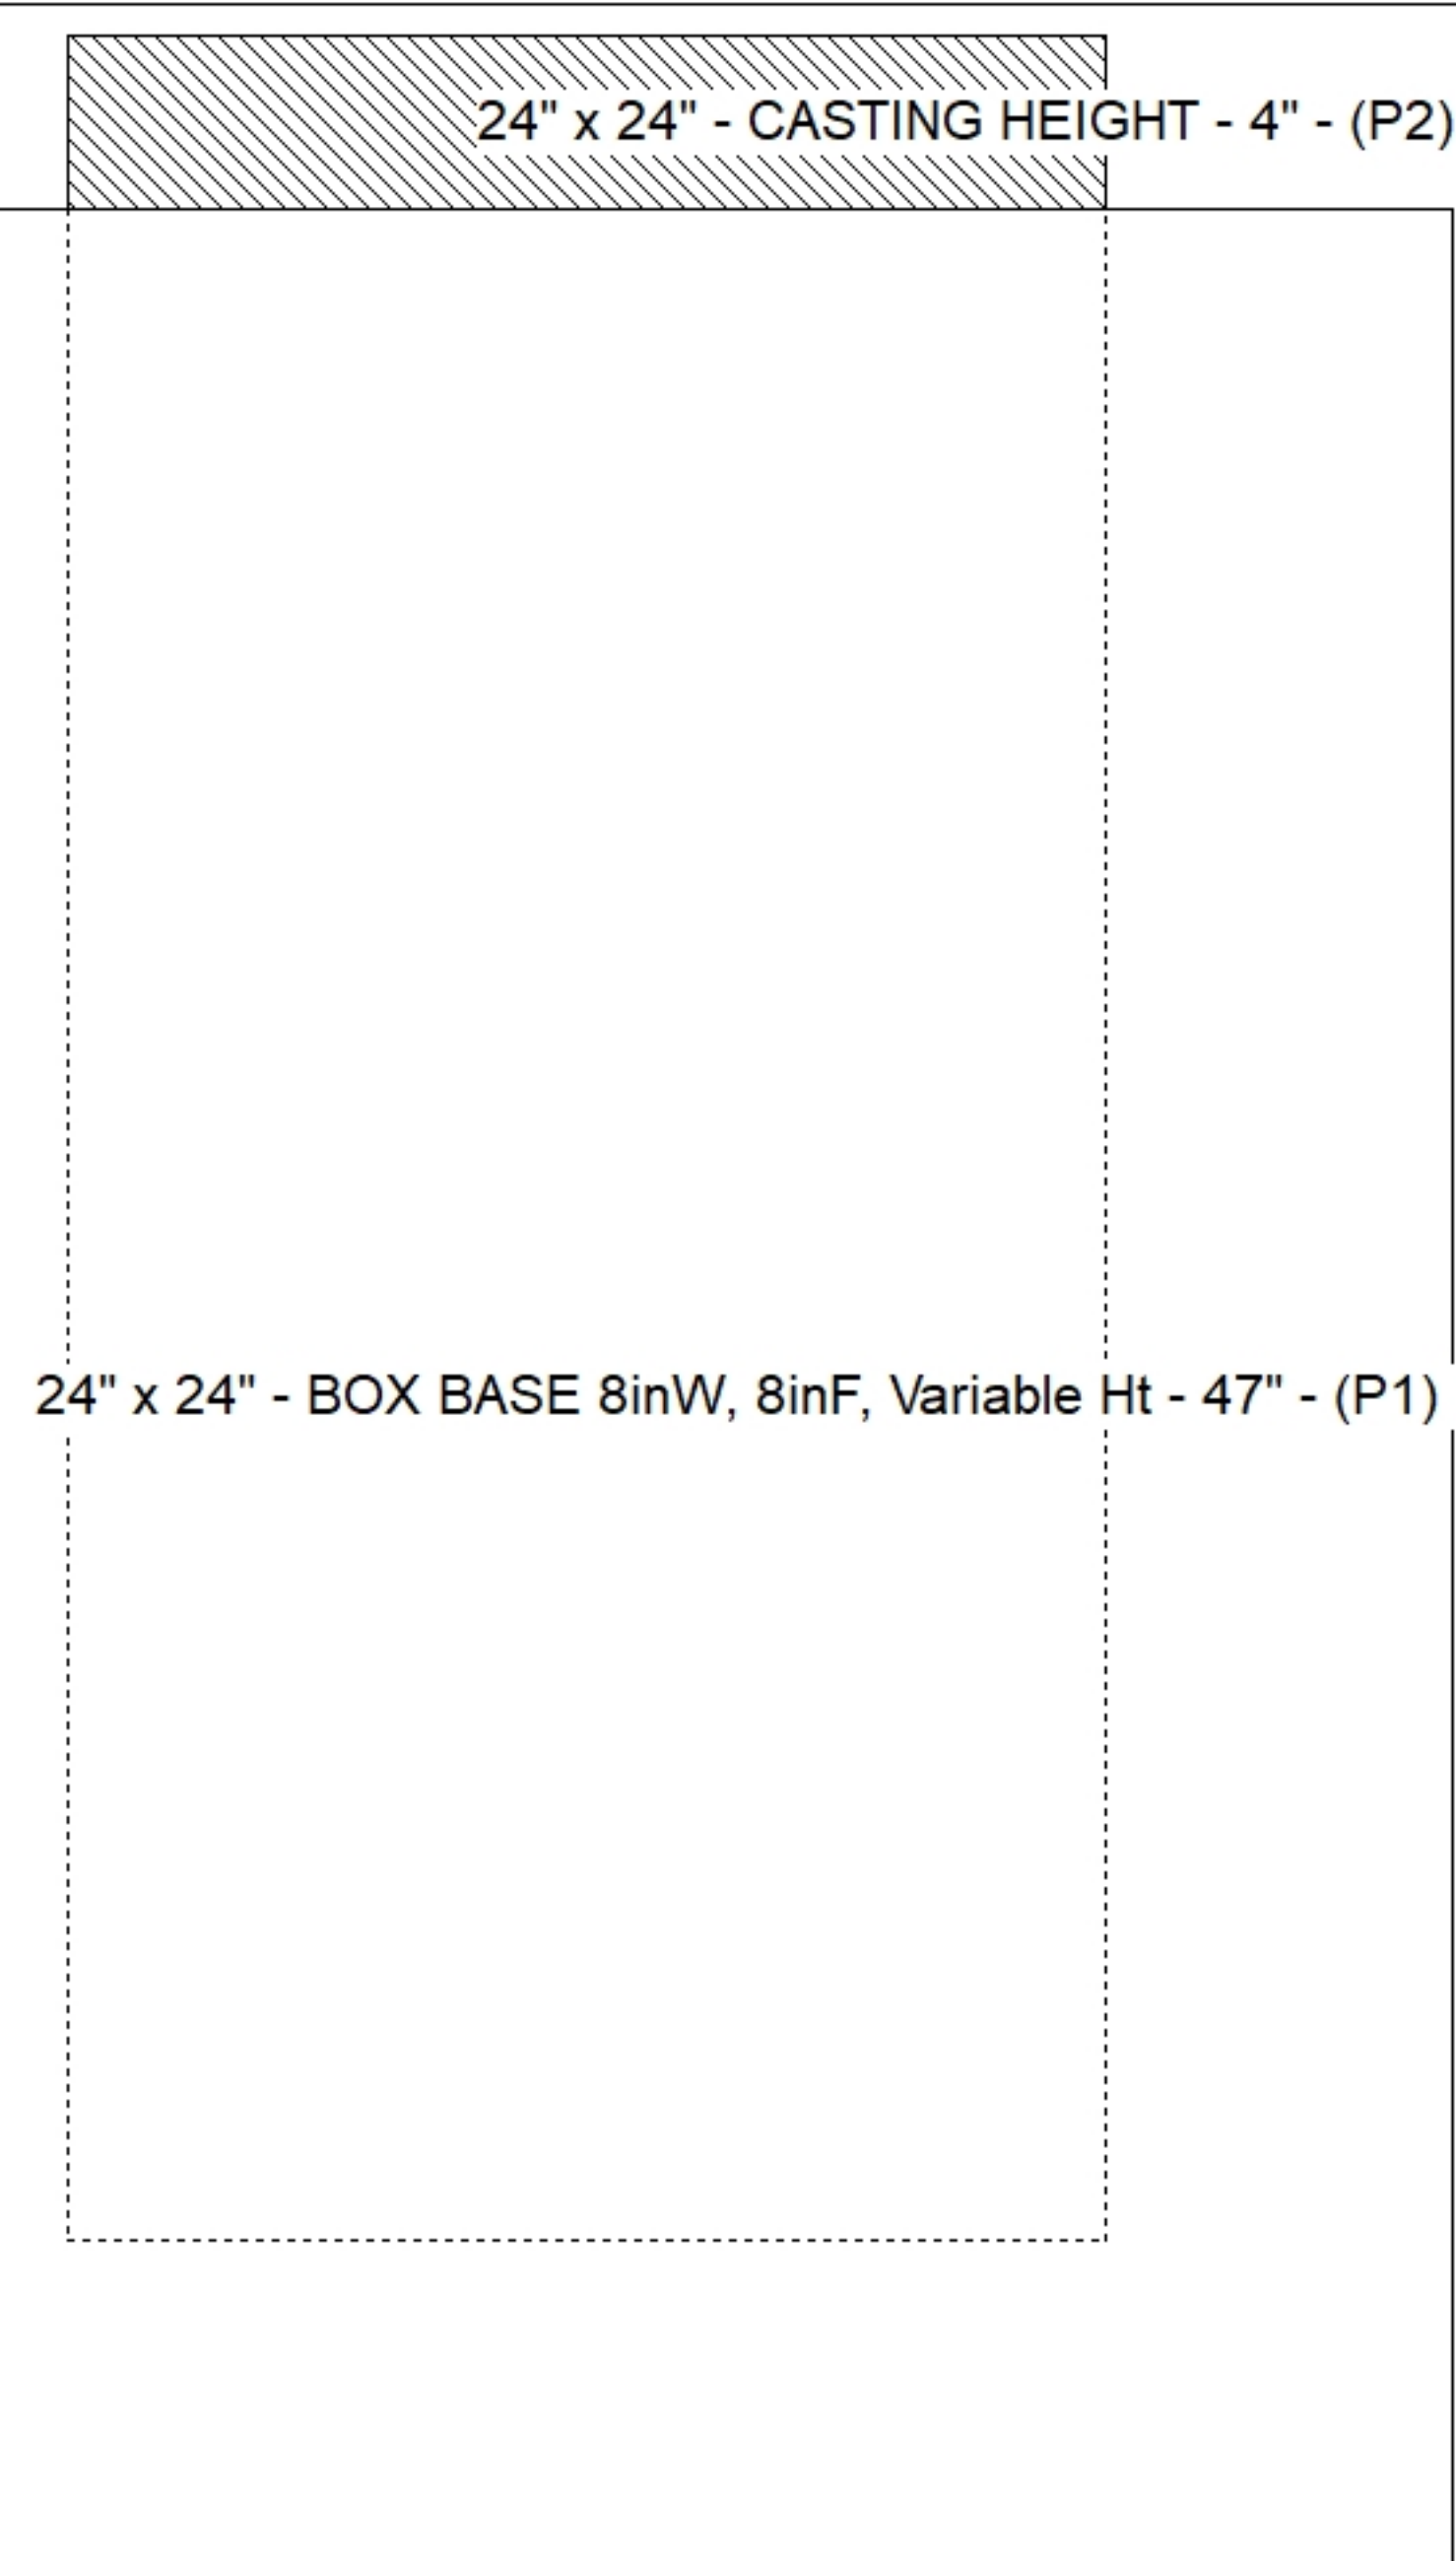

SUBMITTAL  
APPROVED BY: