
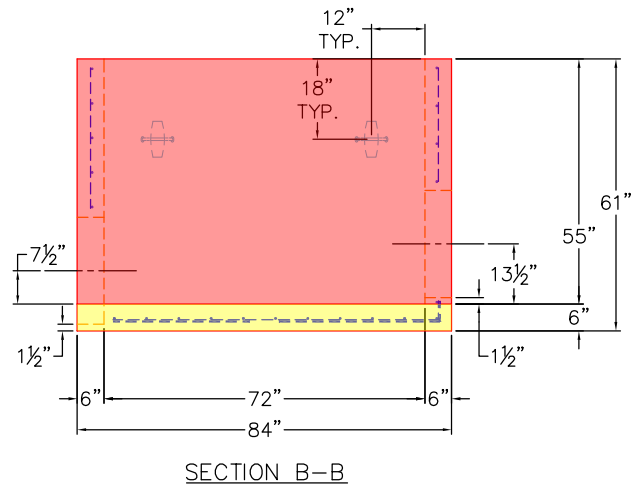
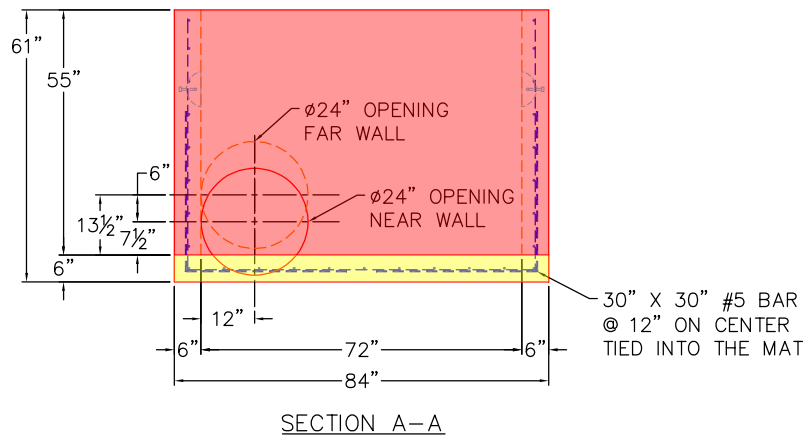


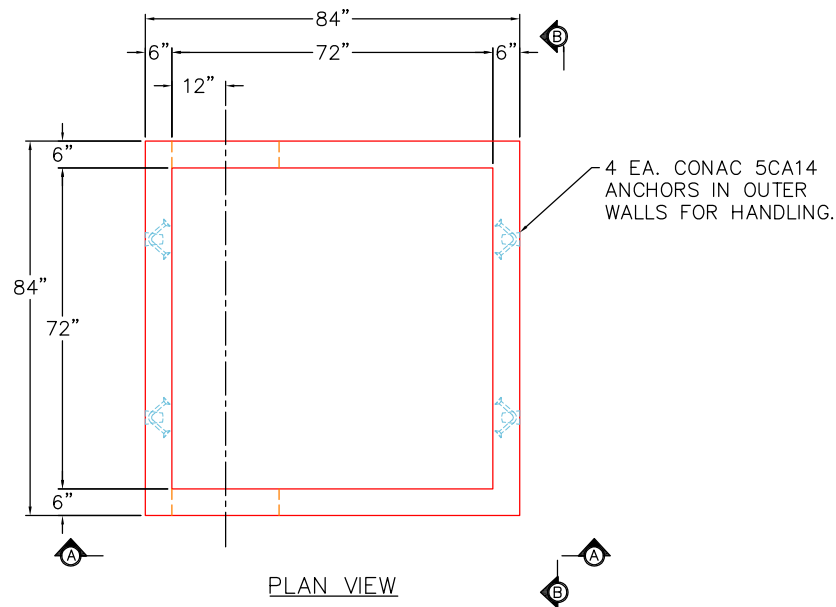

GENERAL NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 5,000 PSI AT 28 DAYS. CONCRETE.
3. REINFORCING: PER ASTM A615 (GRADE 60).
- WALLS/FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
4. WEIGHTS: TOTAL = 11,737 LBS
FIRST POUR = 3,523 LBS
SECOND POUR = 8,214 LBS
5. VAULT JOINT TO BE SEALED WITH CONCRETE SEALANTS, INC. CS-102 ROLL BUTYL MASTIC. (SUPPLIED BY ICAST)
6. STRUCTURE TO HAVE INTERNALS INSTALLED BY ICAST.
7. INLET & OUTLET PIPE OPENINGS TO BE STENCILED ONTO THE OUTSIDE OF THE PRODUCT.
8. LIFT ANCHORS TO BE PLACED ON THE OUTSIDE OF THE STRUCTURE

FIRST POUR DRAWING

PRODUCTION WORK ORDER



QUALITY CONTROL CHECKLIST

- ☐ ALL DIMENSIONS CORRECT.
- ☐ LIFTERS INSTALLED.
- ☐ OPENING CORRECT LOCATION.
- ☐ REINFORCING CORRECT.
- ☐ SURFACE QUALITY ACCEPTABLE.
- ☐ EDGES CHAMFERED.
- ☐ ALL PATCHWORK ACCEPTABLE.

PRODUCT I.D.: BX072072-08BA-VH

PRODUCT VIEW: RIGHT SIDE UP

PLANT: BEAVER DAM, KY.

WEIGHT: 11,737 LBS.

TOP SECTION JOINT: N/A

BASE SECTION JOINT: N/A

QC CHECK INITIALS:

DESCRIPTION: 72" X 72" X 55" TALL VAULT BASE

CUSTOMER: CONTECH ENGINEERING SOLUTIONS

PROJECT: 868959 COOK OUT

STRUCTURE: 10-KFPD0606

ORDER NO: 26-2789



PC: C. GOFF

DRAWING: S. FELLETER

DATE: 06/25/26

SCALE: NTS


PG. 1 of 1

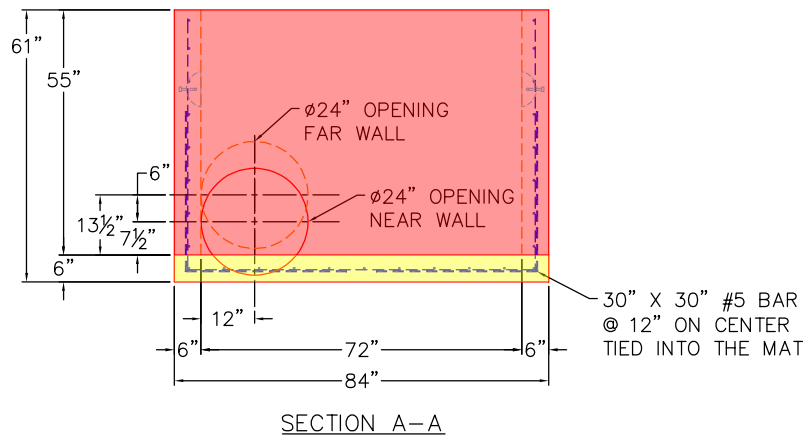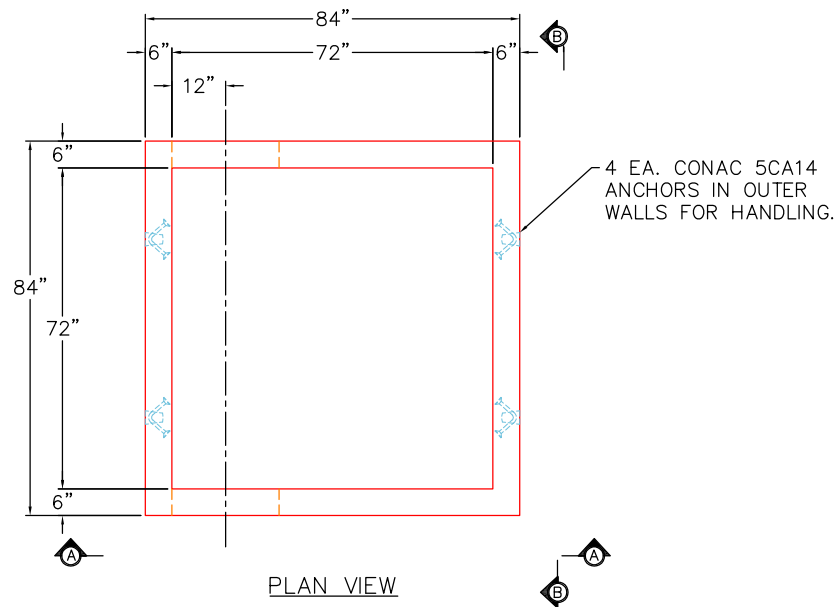

GENERAL NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 5,000 PSI AT 28 DAYS. CONCRETE.
3. REINFORCING: PER ASTM A615 (GRADE 60).
- WALLS/FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
4. WEIGHTS: TOTAL = 11,737 LBS
FIRST POUR = 3,523 LBS
SECOND POUR = 8,214 LBS
5. VAULT JOINT TO BE SEALED WITH CONCRETE SEALANTS, INC. CS-102 ROLL BUTYL MASTIC. (SUPPLIED BY ICAST)
6. STRUCTURE TO HAVE INTERNALS INSTALLED BY ICAST.
7. INLET & OUTLET PIPE OPENINGS TO BE STENCILED ONTO THE OUTSIDE OF THE PRODUCT.
8. LIFT ANCHORS TO BE PLACED ON THE OUTSIDE OF THE STRUCTURE

SECOND POUR DRAWING

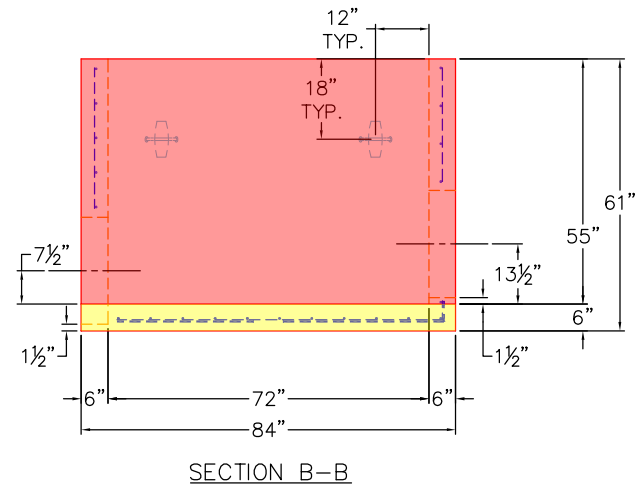

PRODUCTION WORK ORDER		PRODUCT I.D.: BX072072-08BA-VH	DESCRIPTION: 72" X 72" X 55" TALL VAULT BASE	
	QUALITY CONTROL CHECKLIST ☐ ALL DIMENSIONS CORRECT. ☐ LIFTERS INSTALLED. ☐ OPENING CORRECT LOCATION. ☐ REINFORCING CORRECT. ☐ SURFACE QUALITY ACCEPTABLE. ☐ EDGES CHAMFERED. ☐ ALL PATCHWORK ACCEPTABLE.	PRODUCT VIEW: RIGHT SIDE UP	CUSTOMER: CONTECH ENGINEERING SOLUTIONS	
		PLANT: BEAVER DAM, KY.	PROJECT: 868959 COOK OUT	
		WEIGHT: 11,737 LBS.	STRUCTURE: 10-KFPD0606	
		TOP SECTION JOINT: N/A	ORDER NO: 26-2789	
		BASE SECTION JOINT: N/A	PC: C. GOFF	DRAWING: S. FELLETER
		QC CHECK INITIALS:	DATE: 06/25/26	SCALE: NTS PG. 1 of 1