

Job Name: 26-2800 901652 13635 Telegraph Road
Job Location: CPU
Contractor: Contech Engineering Solutions

Plant: Beaver Dam

Tech: S. Felletter

6/30/2026 1:03:45 PM

PC: C. Goff



Structure ID: 10-CS-5

P3 MH060LD13SP

MH FLAT TOP SPEC. (30" CASTING CAST IN) F/G

P4) 30" - CASTING HEIGHT - 0"
P3) 60" - MH FLAT TOP SPEC. (30" CASTING CAST IN) F/G - 13"
P2) 60" - MH RISER Custom Ht T/G - 63"
P1) 60" - MH BASE (09"F) Custom Ht T/n - 18"
1) ASSEMBLY REQUIRED
1) CVSTENCILING
2) 60" - Con Seal CS-102 1.00"
2) Hole - 16



0 lb
2589 lb
6372 lb
4954 lb
0 lb
0 lb
0 lb
0 lb

Structure Total: 13915 lb

Structure Notes:
4" CASTING BY OTHERS
LIFTING ANCHORS TO BE INSTALLED
ON THE OUTSIDE OF THE STRUCTURE
ICAST TO INSTALL THE INTERNALS
CONTECH'S LOGO AS WELL AS THE
INLET AND OUTLET MUST BE
STENCILED ONTO THE STRUCTURE

GENERAL NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE 5,000 PSI AT 28 DAYS.
3. REINFORCING: #5 @ 6" C.C. E.W. PER ASTM A615 (GRADE 60)

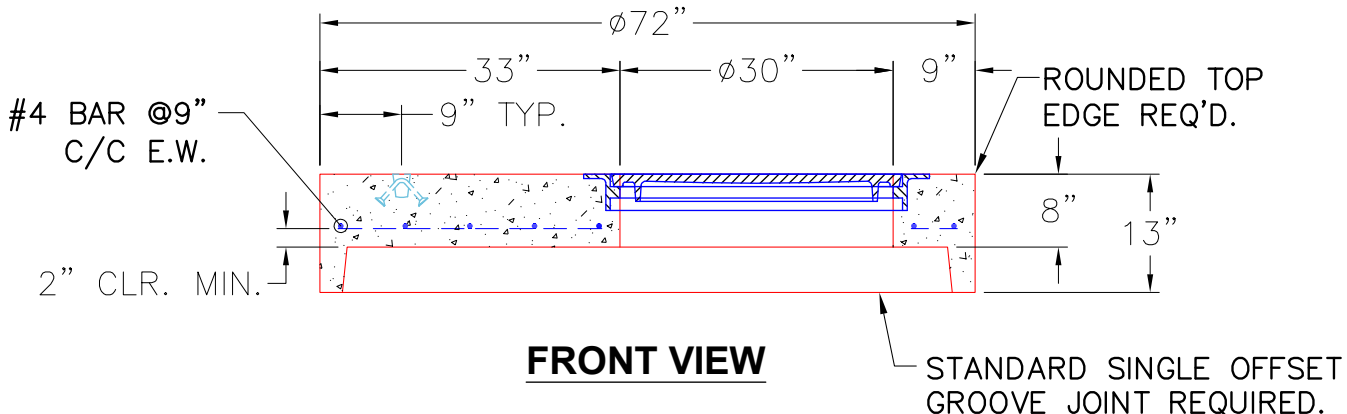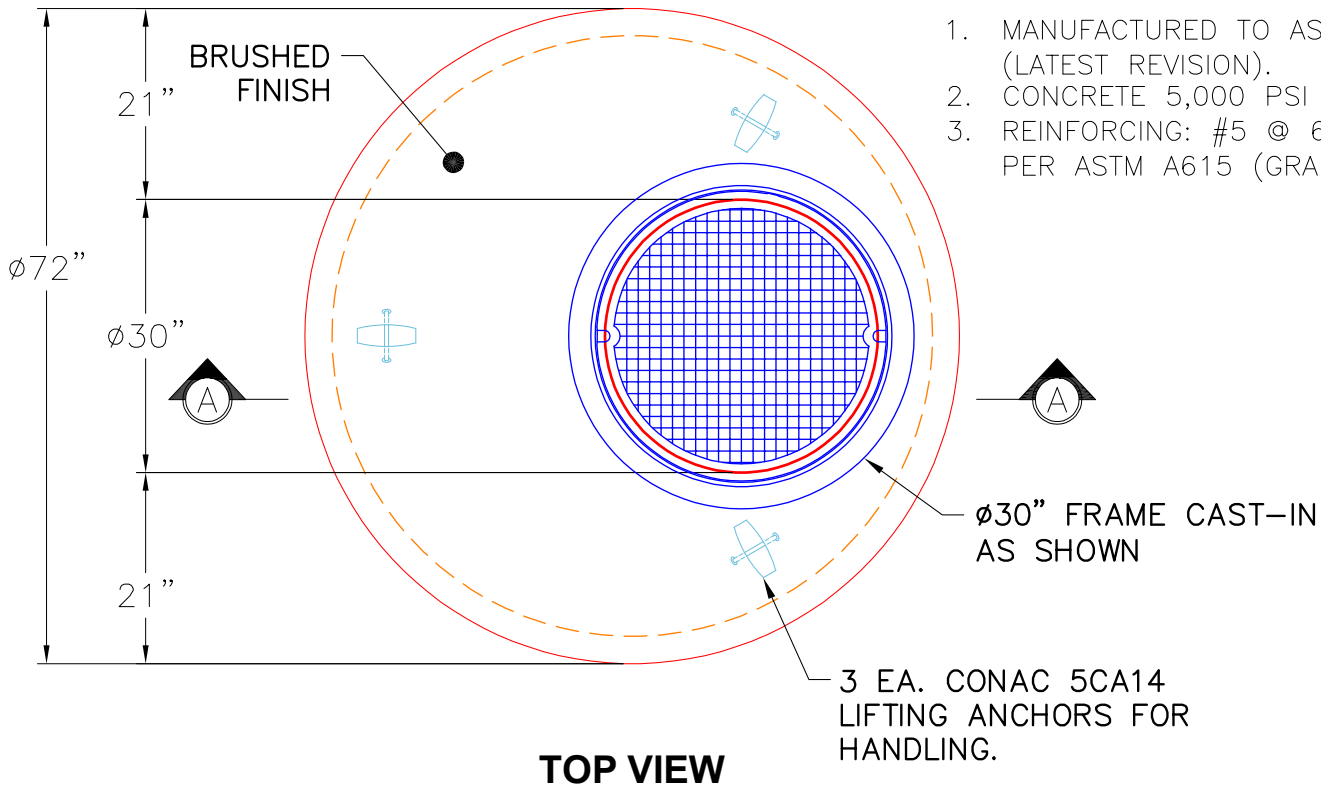

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 6"

Height (Ext): 13"

Weight (Net): 2589 lb
Volume (Net): 0.66cu.yd