

Contractor: Contech Engineering Solutions


Plant: Beaver Dam




Slack: 8"

CONTECH'S LOGO AS WELL AS THE
INLET AND OUTLET MUST BE
STENCILED ONTO THE STRUCTURE


Structure Total: 14610 lb

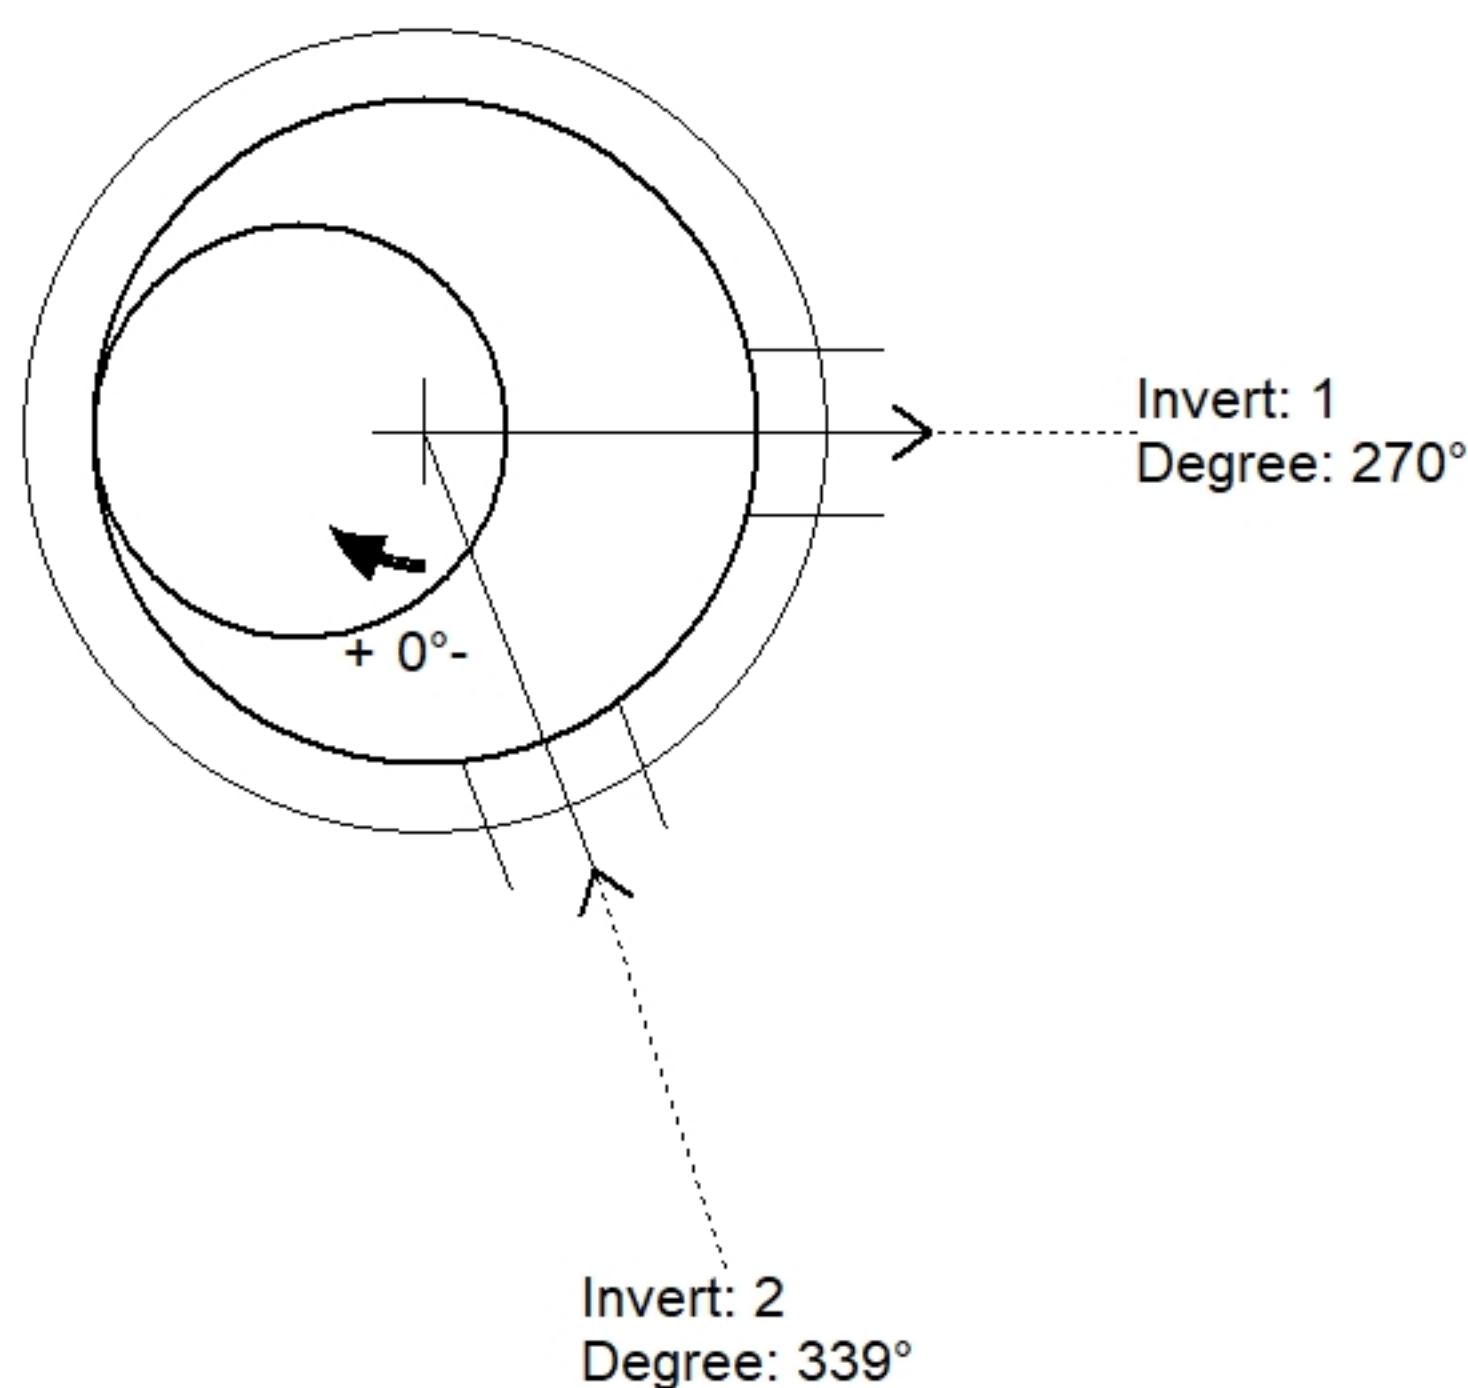

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (⌵)	Ref
Rim	610.55'							
Reducer								
Invert 1	598.55'	270°	8" PVC SDR35	8.5"	12"	PSX 12-08 NYLO	26.75"	P2
Invert 2	598.55'	339°	8" PVC SDR35	8.5"	12"	PSX 12-08 NYLO	26.75"	P2
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

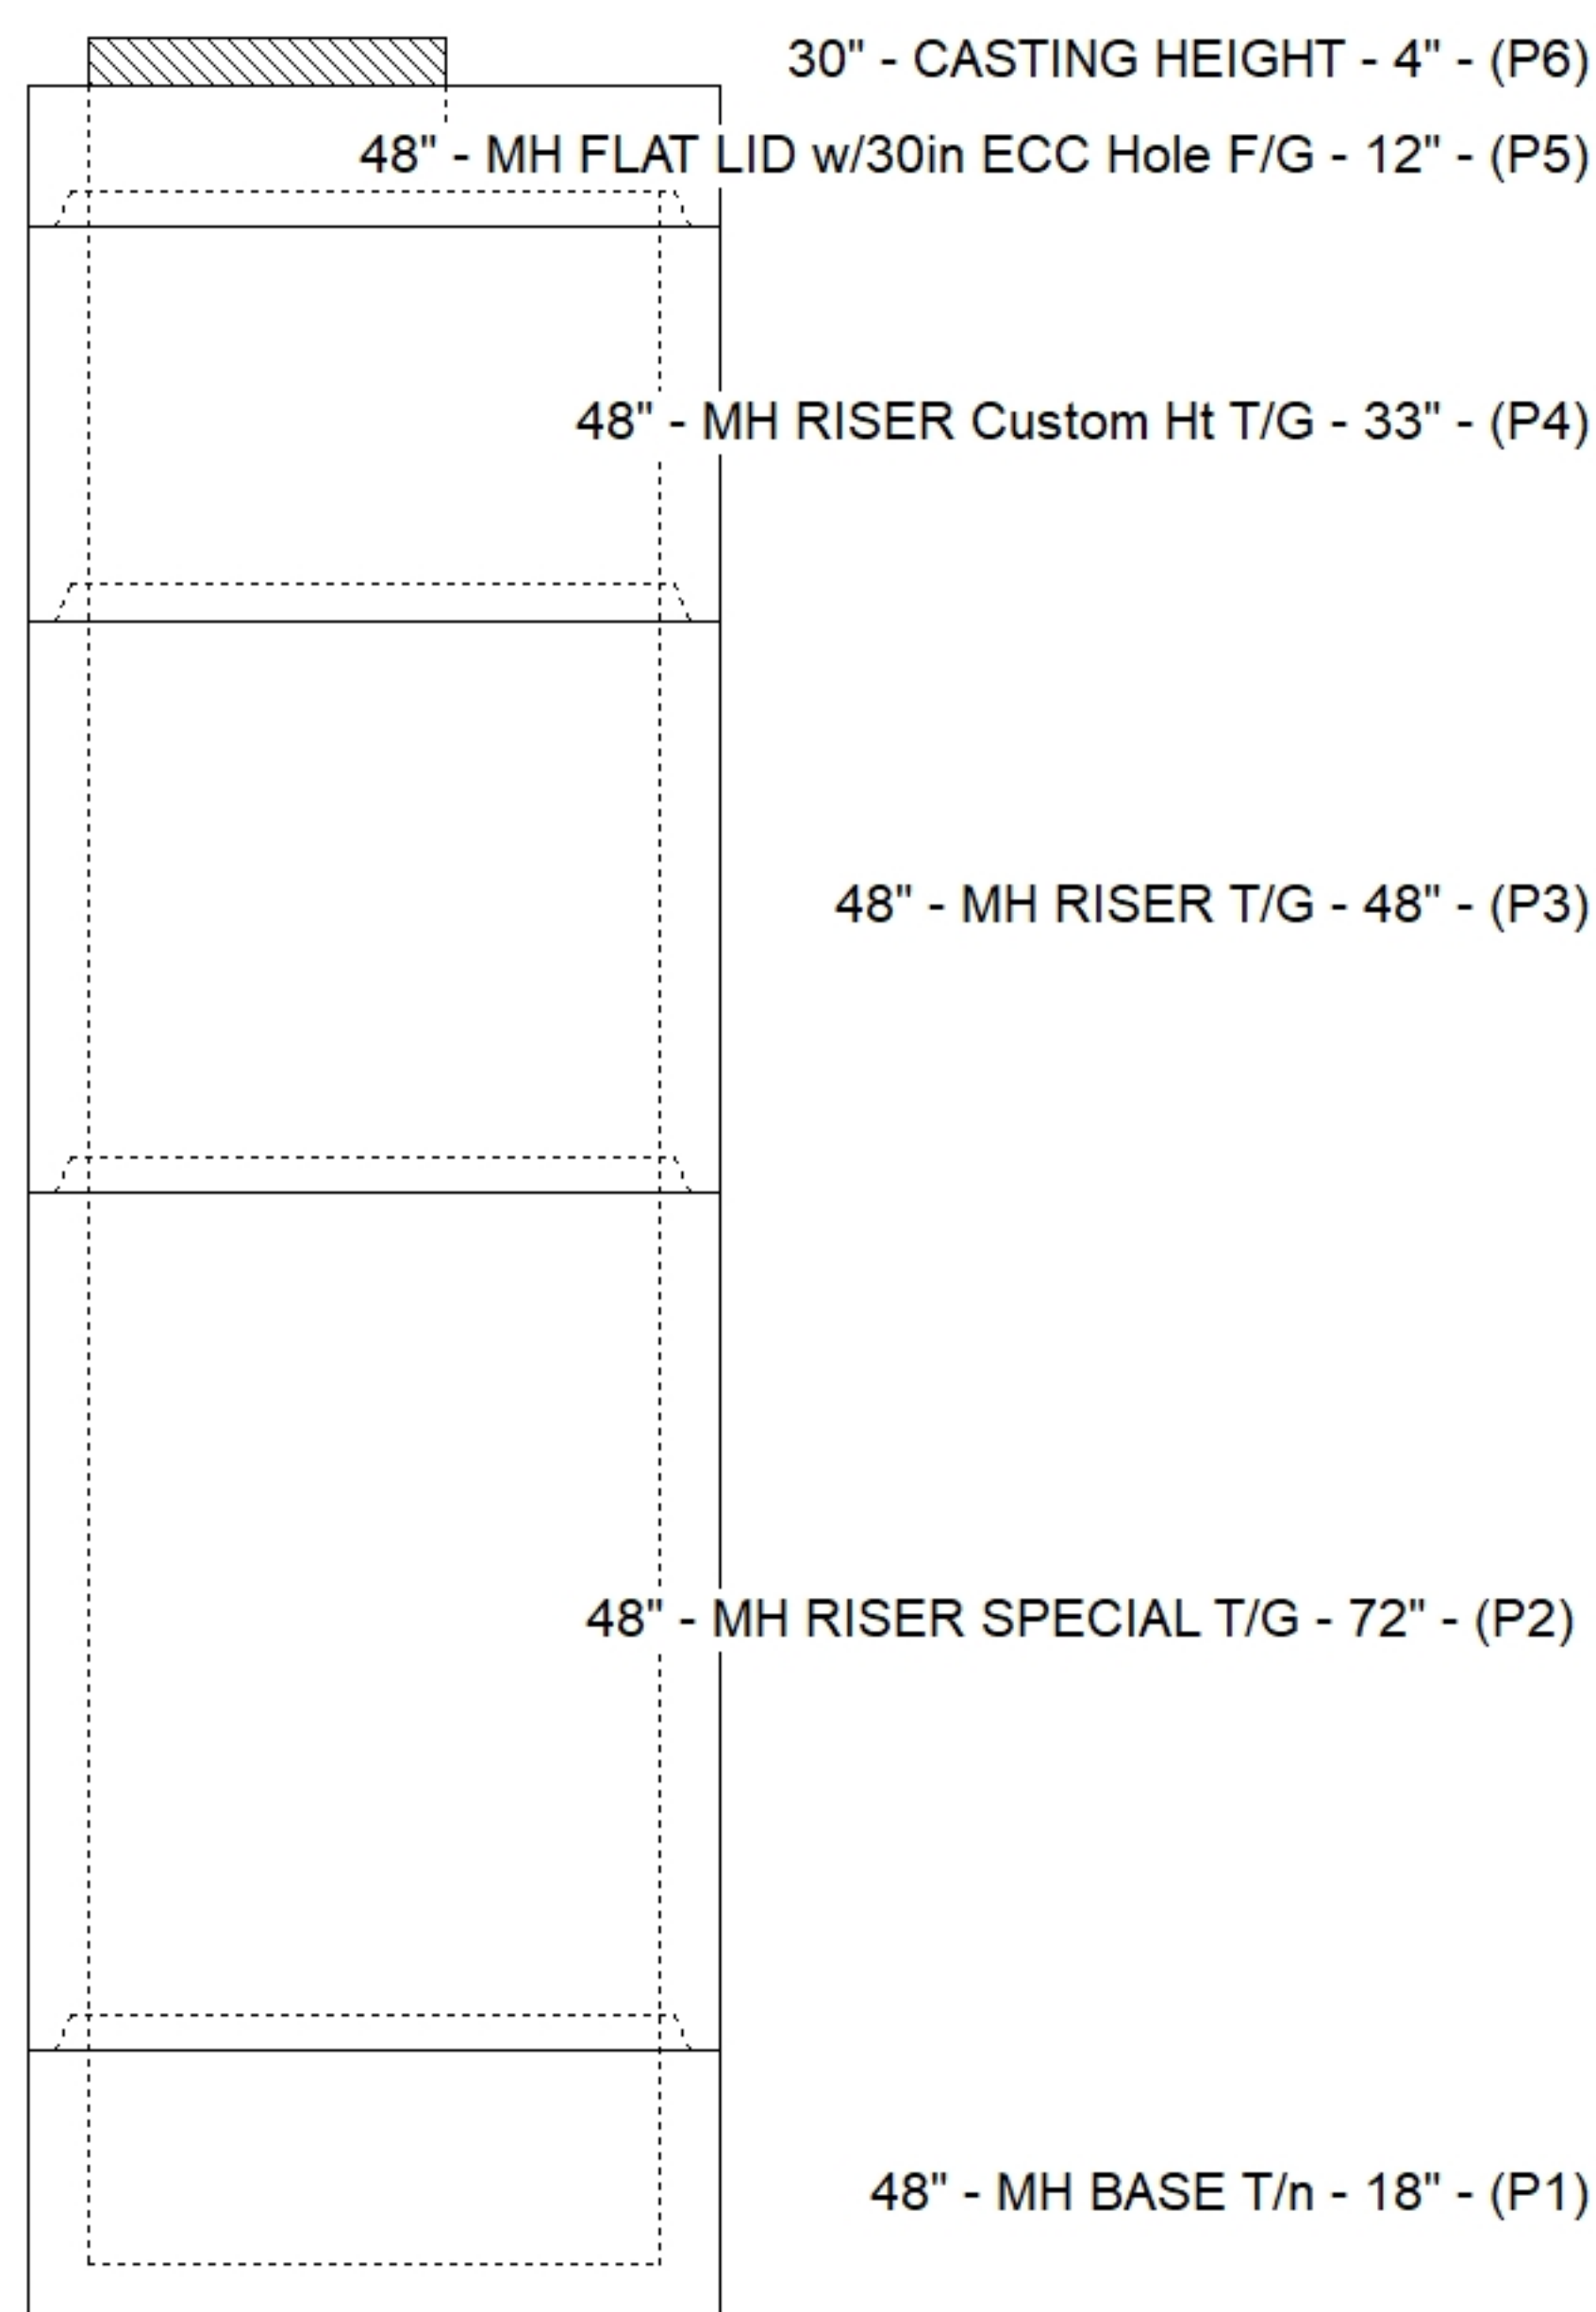

Default - Interior Dimensions

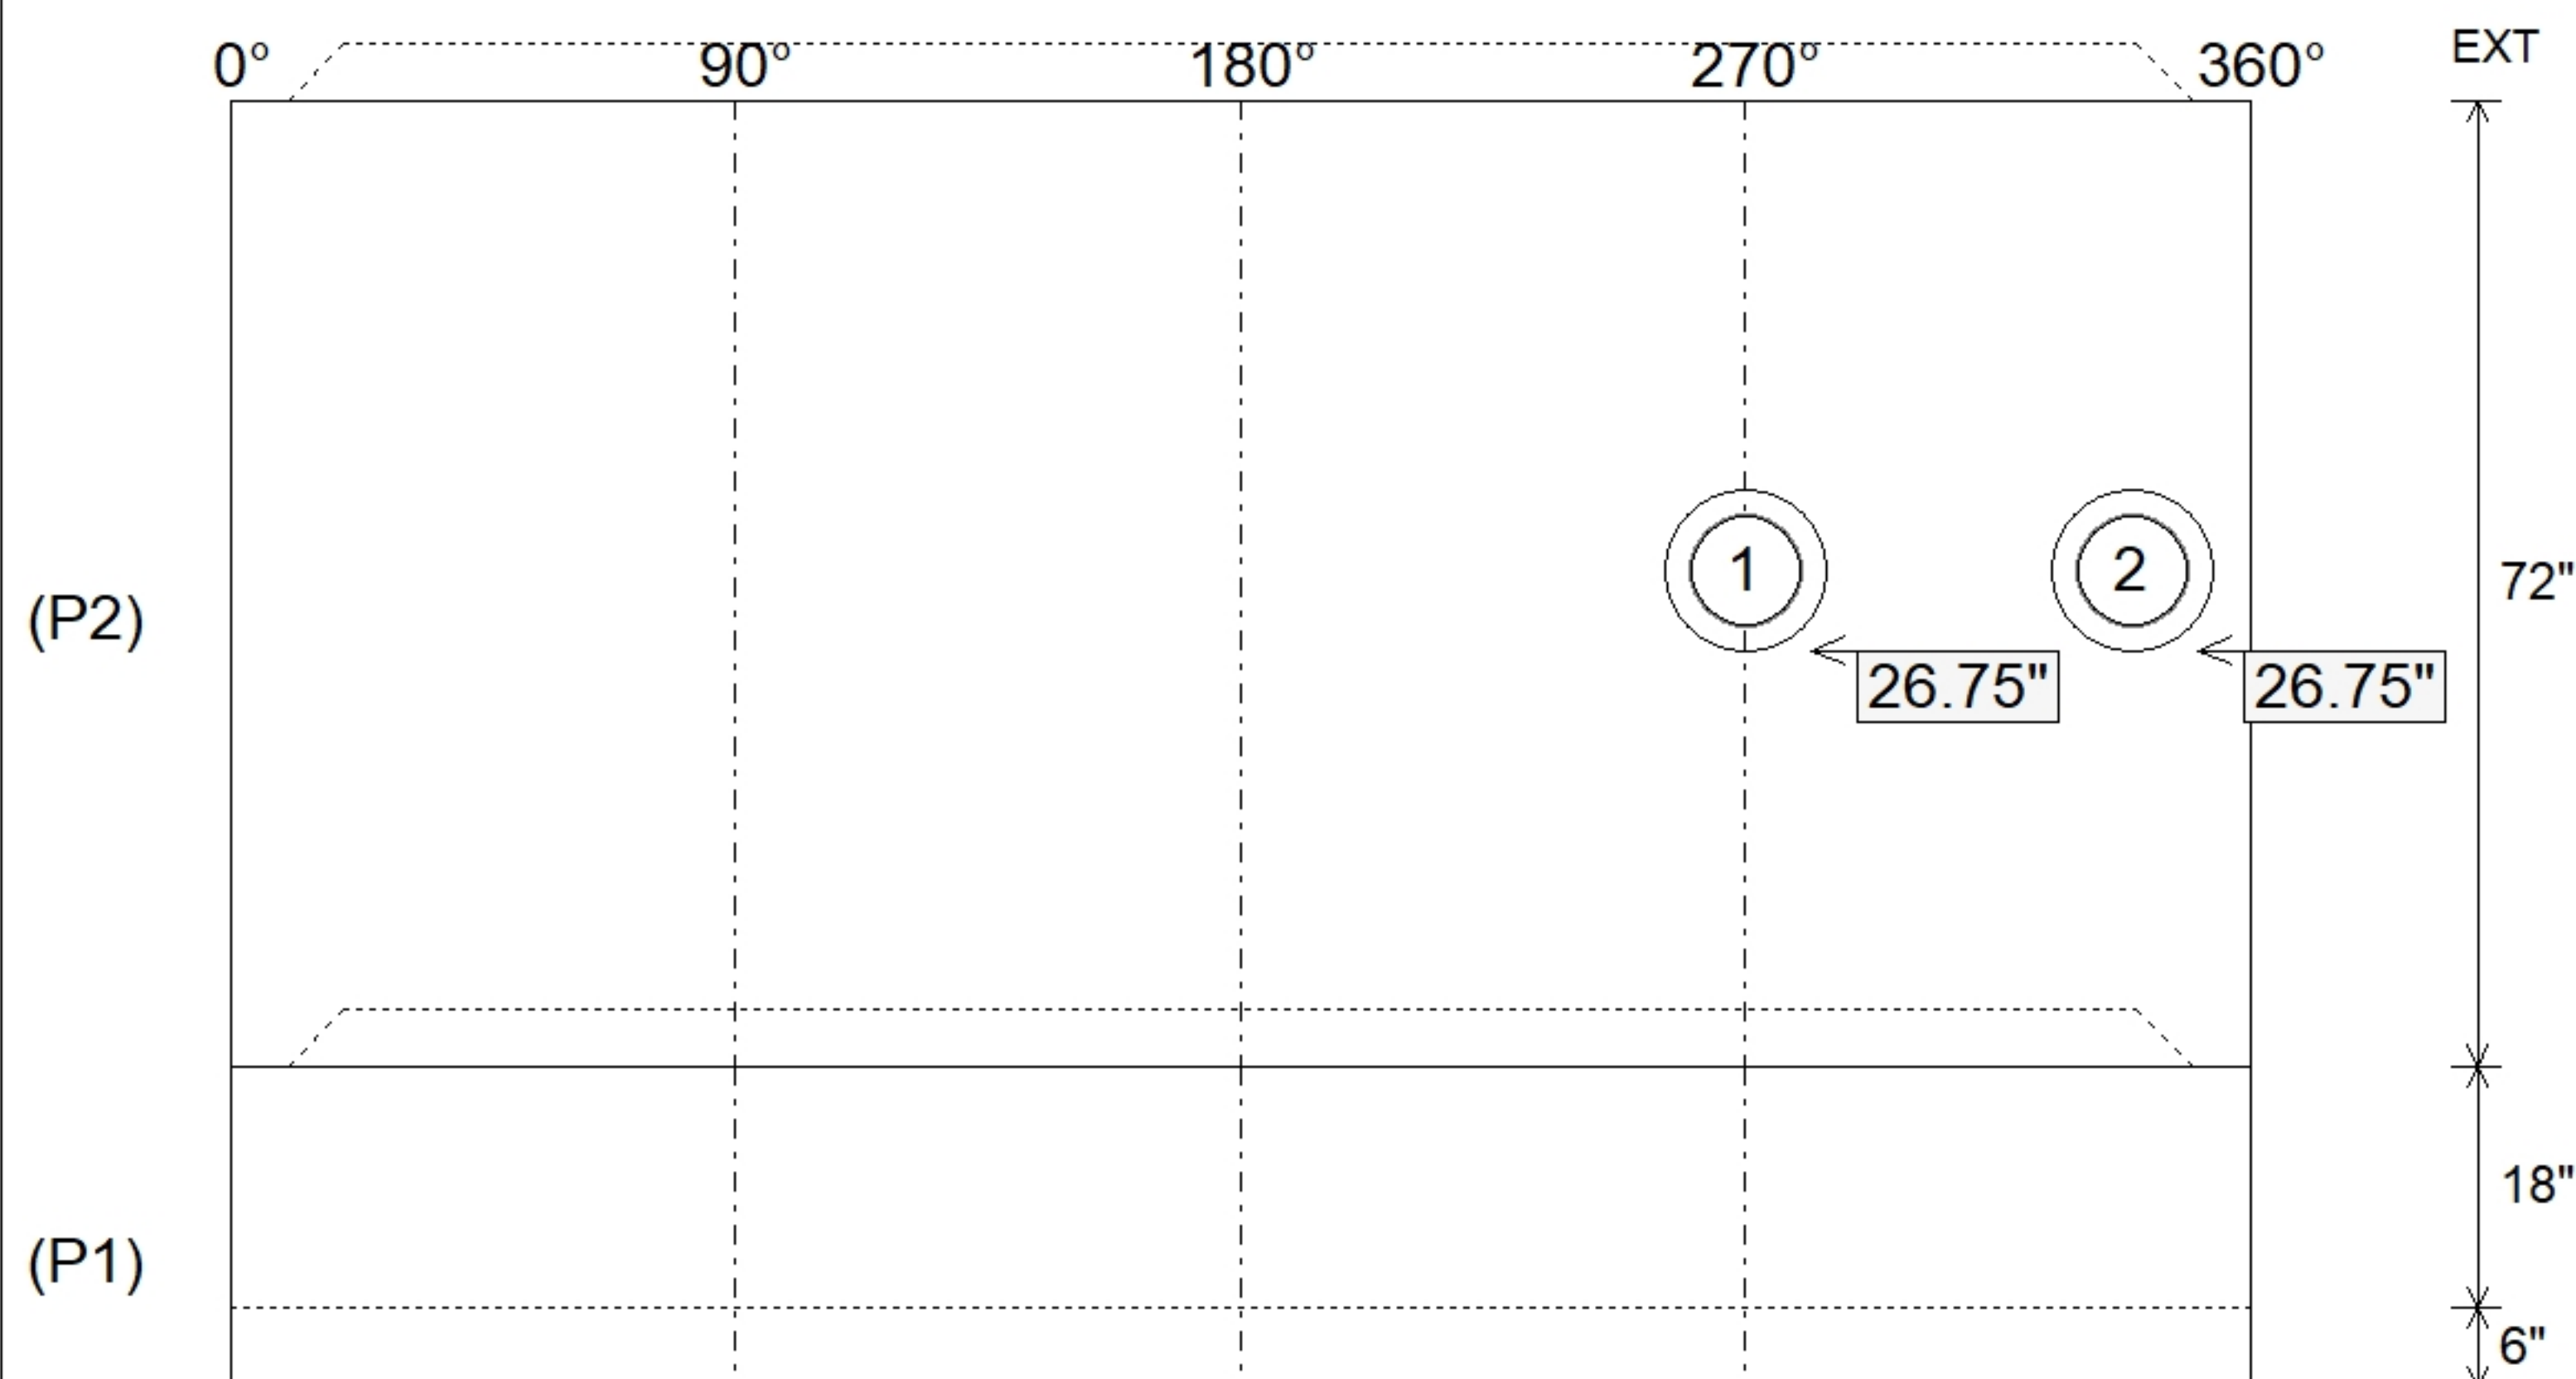

SUBMITTAL
APPROVED BY: