

Job Name: 26-2809 - Yorkshire Estates Ph 1-4  
Job Location: Mt. Juliet, TN  
Contractor: Harakas

Plant: Beaver Dam

Tech: J. Coppage

10/7/2026 11:51:01 AM

PC: E. Bradley



## Structure ID: MH-G1 SS-MH

### P4 GR3CDARED

### GRADE RING w/ConBlock-CDA Red

- P5) 24" - CASTING HEIGHT - 6"  
P4) 24" - GRADE RING w/ConBlock-CDA Red - 3"  
P3) 48" - CON CONE w/24" HOLE, w/ConBlock-CDA Red - 24"  
P2) 48" - MH RISER w/ConBlock-CDA Red - 24"  
P1) 48" - MH BASE w/ConBlock-CDA Red - 30"  
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212  
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)  
1) 48" - MH INVERT CHANNEL w/ConBlock-CDA Red - FULL HEIGHT  
1) CASTING - JBS 1155 F/C SANITARY  
2) 48" - Conseal CS-102 1.00" (Double)  
2) 24" - Conseal CS-102 1.00" (Double)  
1) PSX - 12-08 NYLO  
6) MH Step ML-10-TDS-NCR - 10"

0 lb  
202 lb  
1297 lb  
1677 lb  
3378 lb  
0 lb  
0 lb  
1440 lb  
250 lb  
0 lb  
0 lb  
8 lb  
0 lb  
-----  
8252 lb


Structure Total:

#### Structure Notes:


1. JBS 1155 SANITARY PROVIDED BY ICAST.
2. PER ASTM C478 SPECIFICATIONS.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. ADMIXTURE = CONBLOCK CDA RED.
5. REINFORCING PER ASTM A615 (GRADE 60).
  - CONE (As .12)
  - RISER/WALLS (As .12)
  - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

#### NOTES:


1. GRADE RINGS MEET OR EXCEED THE FOLLOWING SPECIFICATIONS
  - CONCRETE: 4,000 PSI @ 28 DAYS
  - REINFORCING: (1) #3 HOOP CENTERED (GRADE 60)
2. WEIGHT: 3" 202 LBS.
3. ADMIXTURE: CONBLOCK-CDA RED

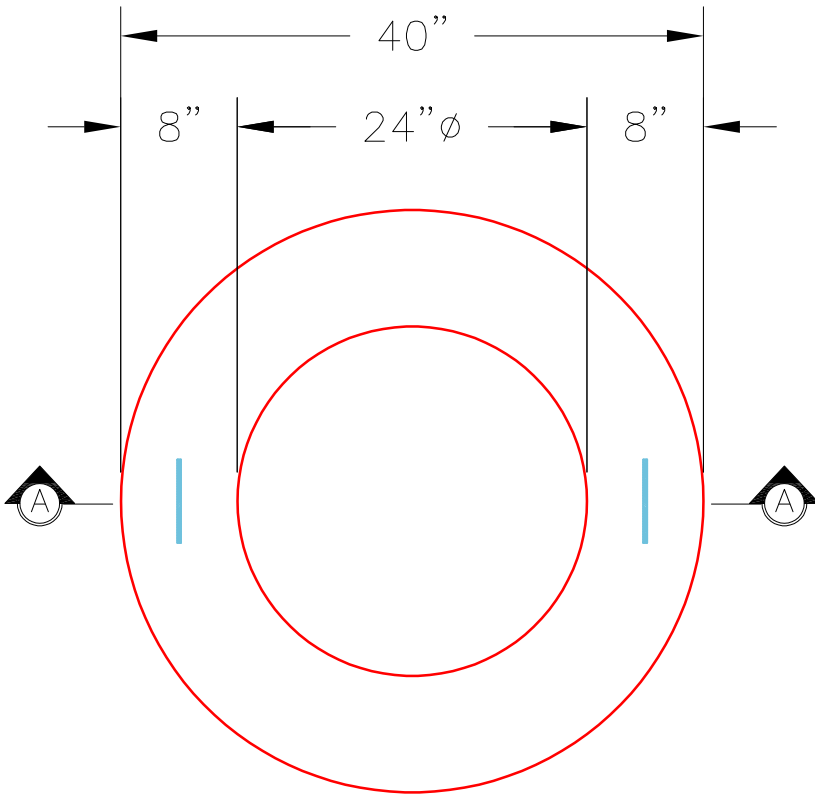

PLAN VIEW

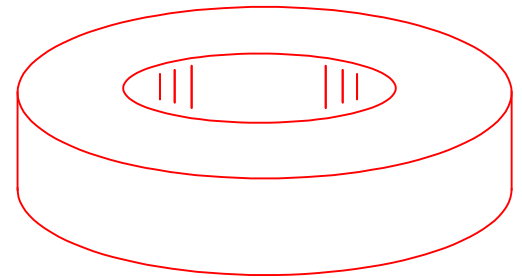

ISOMETRIC VIEW

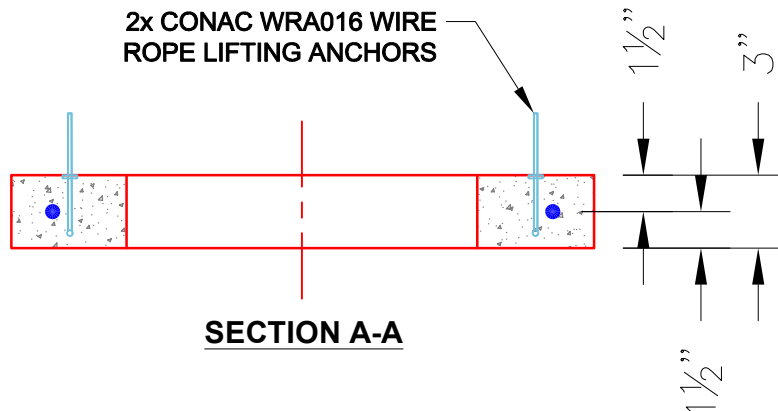

SECTION A-A

Coating (Int):  
Coating (Ext):

Seam Up: Flat  
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 3"

Weight (Net): 202 lb  
Volume (Net): 0.05cu.yd