




Job Name: 26-2809 - Yorkshire Estates Ph 1-4 Job Location: Mt. Juliet, TN Contractor: Harakas					Plant: Beaver Dam 10/7/2026 11:04:45 AM		Tech: J. Coppage PC: E. Bradley			
Structure ID: MH-H1 SS-MHD										
P1 MH048BAVF-DCDARED			MH BASE w/DROP Cust. Ht/ConBlock-CDA Red							
P6) 24" - CASTING HEIGHT - 6" P5) 24" - GRADE RING w/ConBlock-CDA Red - 3" P4) 48" - CON CONE w/24" HOLE, w/ConBlock-CDA Red - 24" P3) 48" - MH RISER w/ConBlock-CDA Red - 36" P2) 48" - MH RISER w/DROP/ConBlock-CDA Red - 60" P1) 48" - MH BASE w/DROP Cust. Ht/ConBlock-CDA Red - 36" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL w/ConBlock-CDA Red - FULL HEIGHT 1) CASTING - JBS 1155 F/C SANITARY 3) 48" - Conseal CS-102 1.00" (Double) 2) 24" - Conseal CS-102 1.00" (Double) 1) A-Lok - 0285 1) PSX - 12-08 NYLO 1) Drop Tee - 8" PVC 1) Drop Elbow - 8" PVC 13) 8" ML-10-RD-ND Invert 13.62'					0 lb 202 lb 1297 lb 2515 lb 4168 lb 3742 lb 0 lb 0 lb 1440 lb 250 lb 0 lb 0 lb 1 lb 8 lb 0 lb 0 lb 0 lb		Structure Notes: 1. JBS 1155 SANITARY PROVIDED BY ICAST. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. ADMIXTURE = CONBLOCK CDA RED. 5. REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
13) 8" ML-10-RD-ND Invert 13.62' Slack: 0.44" Sump: 2" Step Position: 180°					Structure Total: 13623 lb					
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	516.38'	0°	0"	8" PVC SDR26	8.5"	A-Lok 0285	9.75"	9.818"	1.125"	0"
Invert 2	516.58'	90°	45.553"	8" PVC SDR26	8.5"	PSX 12-08 NYLO	12"	12.129"	2.4"	0"
Invert 3										
Invert 4	516.58'	270°	136.659"	8" PVC SDR26	8.5"	Drop Elbow 8" PVC	8.5"	8.545"	4.15"	0"
Invert 5										
Invert 6										
Invert 7										
Invert 8										

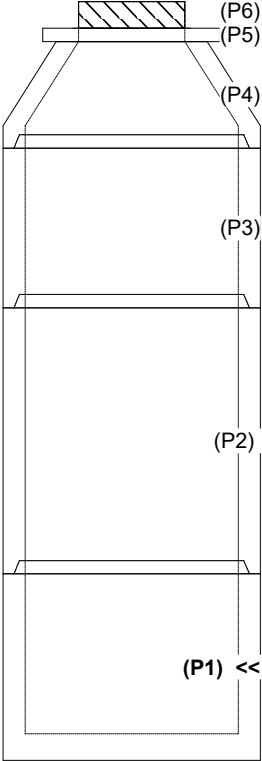


RIGHT-SIDE UP VIEW (int. dimensions)

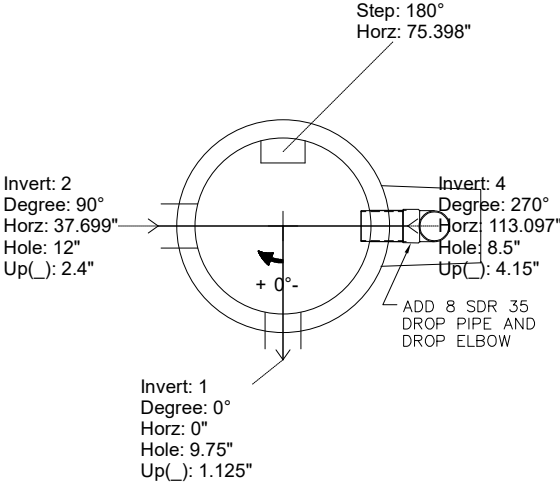

UPSIDE-DOWN VIEW (int. dimensions)

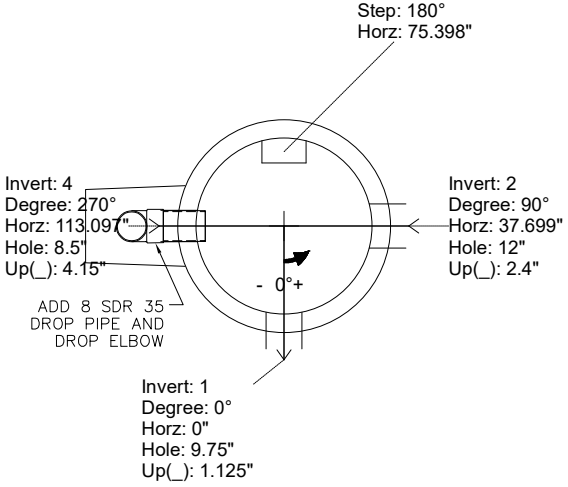

INSIDE WALL DIMENSIONS

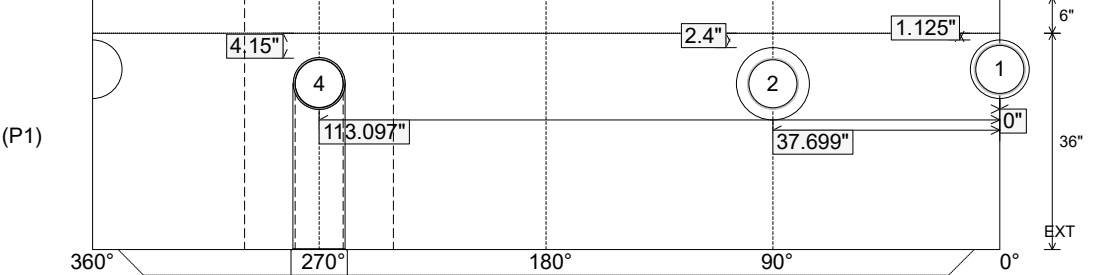

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 36" Height (Ext): 42"	Weight (Net): 3742 lb Volume (Net): 0.96cu.yd
----------------------------------	---------------------------------	--	--	--

Job Name: 26-2809 - Yorkshire Estates Ph 1-4 Job Location: Mt. Juliet, TN Contractor: Harakas					Plant: Beaver Dam 10/7/2026 11:04:45 AM		Tech: J. Coppage PC: E. Bradley				
Structure ID: MH-H1 SS-MHD											
P1 MH048BAVF-DCDARED			MH BASE w/DROP Cust. Ht/ConBlock-CDA Red								
P6) 24" - CASTING HEIGHT - 6" P5) 24" - GRADE RING w/ConBlock-CDA Red - 3" P4) 48" - CON CONE w/24" HOLE, w/ConBlock-CDA Red - 24" P3) 48" - MH RISER w/ConBlock-CDA Red - 36" P2) 48" - MH RISER w/DROP/ConBlock-CDA Red - 60" P1) 48" - MH BASE w/DROP Cust. Ht/ConBlock-CDA Red - 36" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL w/ConBlock-CDA Red - FULL HEIGHT 1) CASTING - JBS 1155 F/C SANITARY 3) 48" - Conseal CS-102 1.00" (Double) 2) 24" - Conseal CS-102 1.00" (Double) 1) A-Lok - 0285 1) PSX - 12-08 NYLO 1) Drop Tee - 8" PVC 1) Drop Elbow - 8" PVC 13RMH 500 ML-10-RD-ND-Inv 13.62'					0 lb 202 lb 1297 lb 2515 lb 4168 lb 3742 lb 0 lb 0 lb 1440 lb 250 lb 0 lb 0 lb 1 lb 8 lb 0 lb 0 lb 0 lb		Structure Notes: 1. JBS 1155 SANITARY PROVIDED BY ICAST. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. ADMIXTURE = CONBLOCK CDA RED. 5. REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.				
Slack: 0.44" Sump: 2" Step Position: 180°					INVERT CHANNEL DRAWING FULL HEIGHT INVERT						
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	516.38'	0°	0"	8" PVC SDR26	8.5"	A-Lok 0285	9.75"	9.818"	1.125"	0"	
Invert 2	516.58'	90°	45.553"	8" PVC SDR26	8.5"	PSX 12-08 NYLO	12"	12.129"	2.4"	0"	
Invert 3											
Invert 4	516.58'	270°	136.659"	8" PVC SDR26	8.5"	Drop Elbow 8" PVC	8.5"	8.545"	4.15"	0"	
Invert 5											
Invert 6											
Invert 7											
Invert 8											

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

INSIDE WALL DIMENSIONS

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 36" Height (Ext): 42"	Weight (Net): 3742 lb Volume (Net): 0.96cu.yd
----------------------------------	---------------------------------	--	--	--