




Structure ID: QL7 HW

P1 HWSF18


18" - SLOPED & FLARED HEADWALL F/F

DIMENSIONS									
PIPE Ø	A	B	C	D	E	F	G	H	I
18"	3'-0"	3'-8"	2'-3"	1'-6"	4'-6"	4"	2 1/2"	2'-2"	5'-2"
									WEIGHT 3,640 LBS.

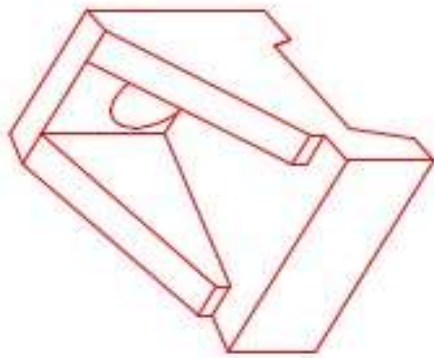


ISOMETRIC VIEW
18" HEADWALL

"A"-ANCHOR LIFTING SYSTEM
FOR PLANT & FIELD HANDLING.

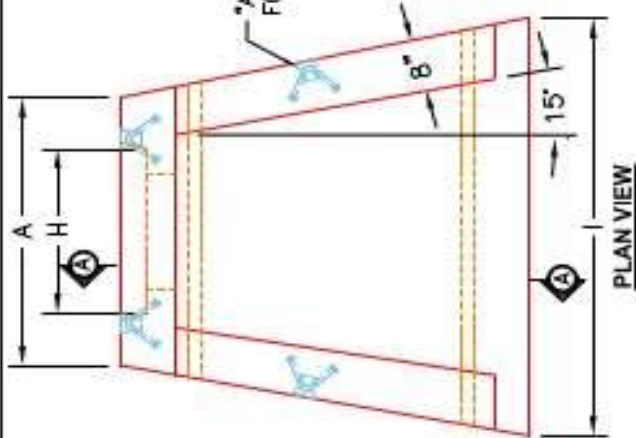


PLAN VIEW

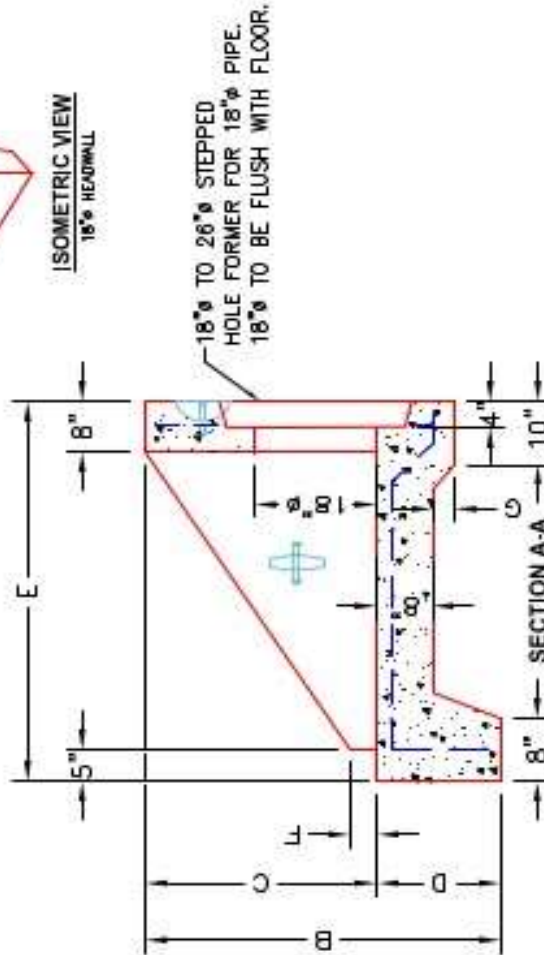

FRONT ELEVATION

- NOTES:
1. CONCRETE: 4500 PSI @ 28 DAYS.
 2. REINFORCING: #4 BAR @ 12" C/C E.W.-GRADE 60, (WITH 2" CONCRETE COVER MINIMUM)
 3. REINFORCING BARS TO BE TACK WELDED OR TIED.
 4. DRAWING TO BE USED IN CONJUNCTION WITH KYTC STD. DRAWING RDH-000-03 AND THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
 5. 1/4" CHAMFER ON ALL EXPOSED EDGES.

PRODUCTION WORK ORDER		PRODUCT I.D.: HWSF18		DESCRIPTION: KYTC 18" SLOPED & FLARED HEADWALL	
	QUALITY CONTROL CHECKLIST	PRODUCT VIEW: RIGHT SIDE UP		CUSTOMER: STOCK	
		PLANT: BEAVER DAM, KY.		PROJECT: STOCK INVENTORY	
		WEIGHT: 3,640 LBS.		STRUCTURE ID.: N/A	
		TOP SECTION JOINT: N/A		QUOTE/SALES ORDER NO: N/A	
		BASE SECTION JOINT: N/A		CHECK: JH. ROSS, PE	
		QC CHECK INITIALS:		DATE: REV. 4/22/24	
				SCALE: NTS	
				PG. 1 of 1	