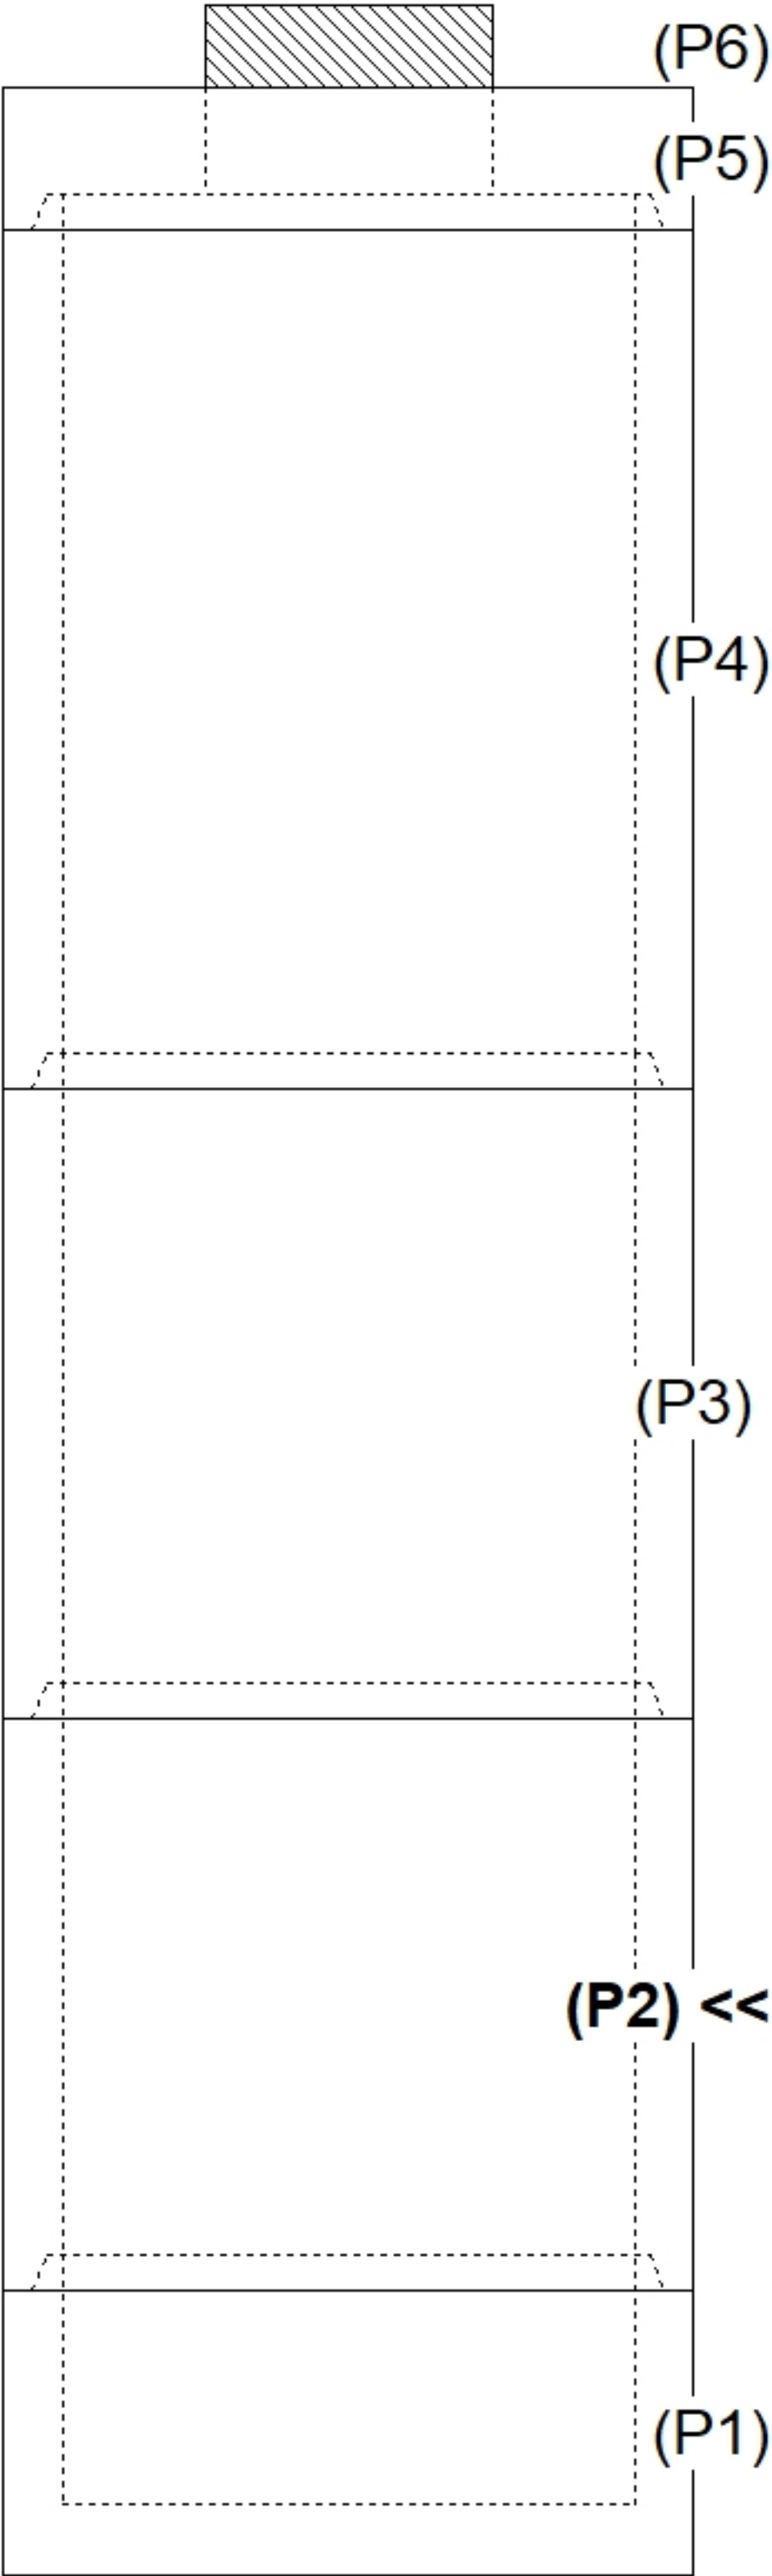
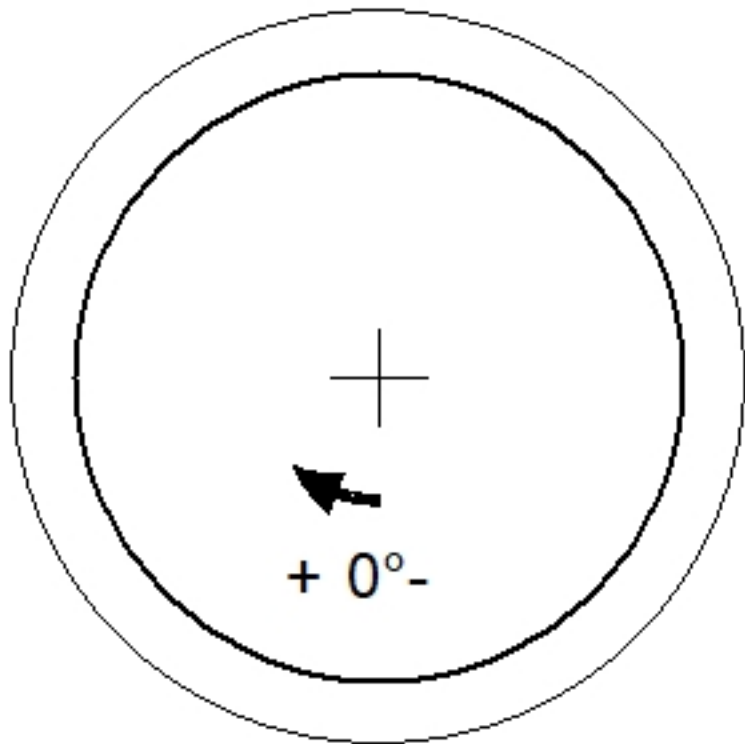
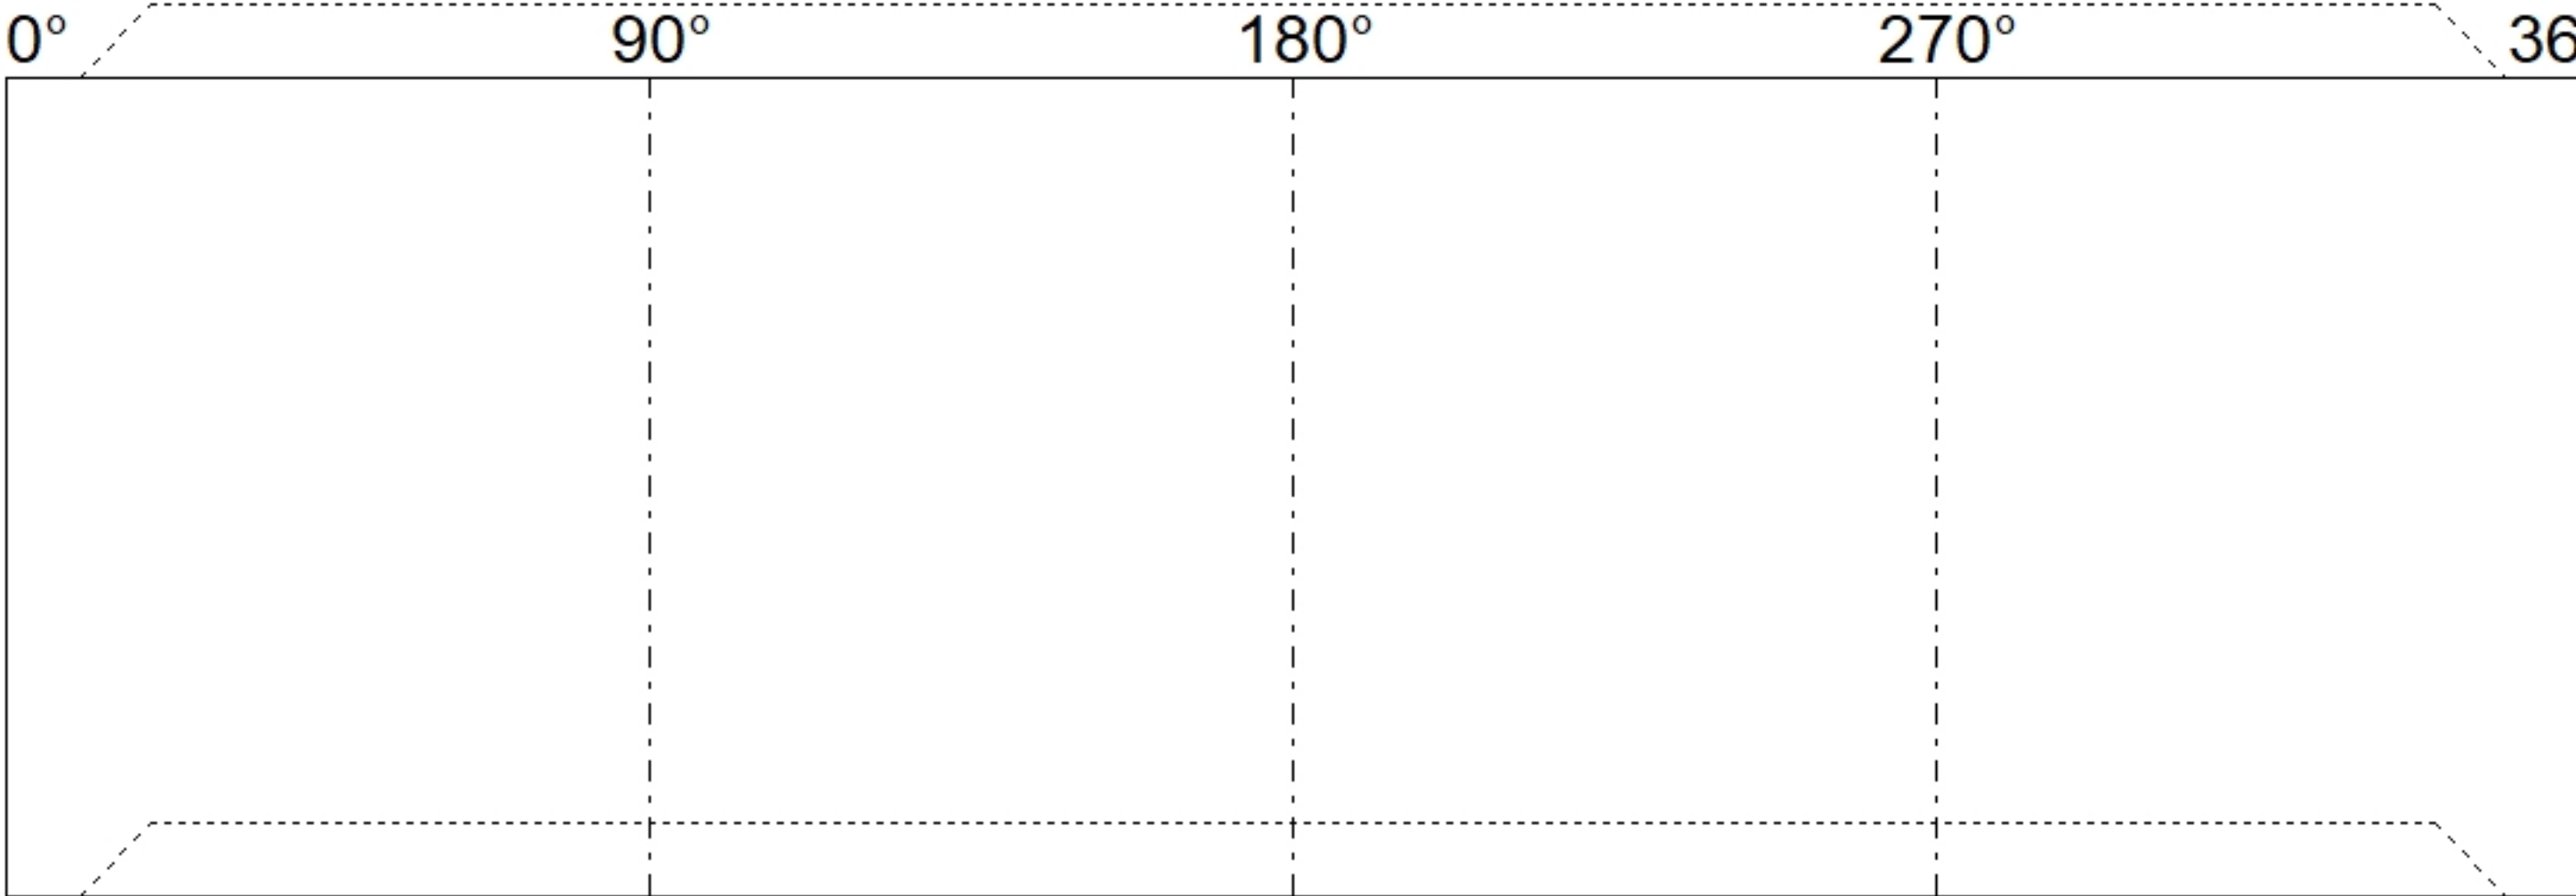


Job Name: 26-2976 ADS St. Charles at Park Hills Job Location: Park Hills, KY Contractor: ADS Advanced Drainage Systems, Inc.				Plant: Beaver Dam 7/23/2026 12:18:14 PM		Tech: S. Felletter PC: T. Ryan						
Structure ID: 14A												
P2			MH048RS48			MH RISER T/G						
P6) 24" - CASTING HEIGHT - 7" P5) 48" - MH FLAT LID w/24" Center Hole F/G - 12" P4) 48" - MH RISER T/G - 72" P3) 48" - MH RISER Custom Ht T/G - 53" P2) 48" - MH RISER T/G - 48" P1) 48" - MH BASE T/n - 18" 1) ASSEMBLY REQUIRED 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) CASTING - HOE MC-375 F/C Storm 4) 48" - Conseal CS-102 1.00" (Double) 1) 24" - Conseal CS-102 1.00" (Double) 2) Hole - 30						0 lb 1580 lb 5030 lb 3070 lb 3353 lb 2588 lb 0 lb 0 lb 0 lb 271 lb 0 lb 0 lb 0 lb Structure Total: 15892 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE MC-375 F/C "STORM"). 4. LIFT ANCHORS TO BE ON THE OUTSIDE OF THE STRUCTURE. 5. P2 & P3 RISERS TO BE MECHANICALLY ATTACHED PRIOR TO INTERNAL INSTALLATION/DELIVERY. . REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.				
Rim: 835.38'		Rim to Invert: 10.84'		Slack: 1.08"		Sump: 81"		Step Position: 0°				
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset		
Invert 1												
Invert 2												
Invert 3												
Invert 4												
Invert 5												
Invert 6												
Invert 7												
Invert 8												
RIGHT-SIDE UP VIEW (int. dimensions)												
												
INSIDE WALL DIMENSIONS												
												
Coating (Int): Coating (Ext):				Seam Up: Tongue Seam Dn: Groove		Wall Thickness: 5" Floor Height: 0"		Height (Int): 48" Height (Ext): 48"		Weight (Net): 3353 lb Volume (Net): 0.86cu.yd		