



Job Name: 26-2998 Margaret Mary Health Barrier Walls
Job Location: Batesville, IN
Contractor: Dave Omara Contractor, Inc.

Plant: Beaver Dam
7/15/2026 1:00:10 PM

Tech: S. Felletter
PC: M. Sullivan

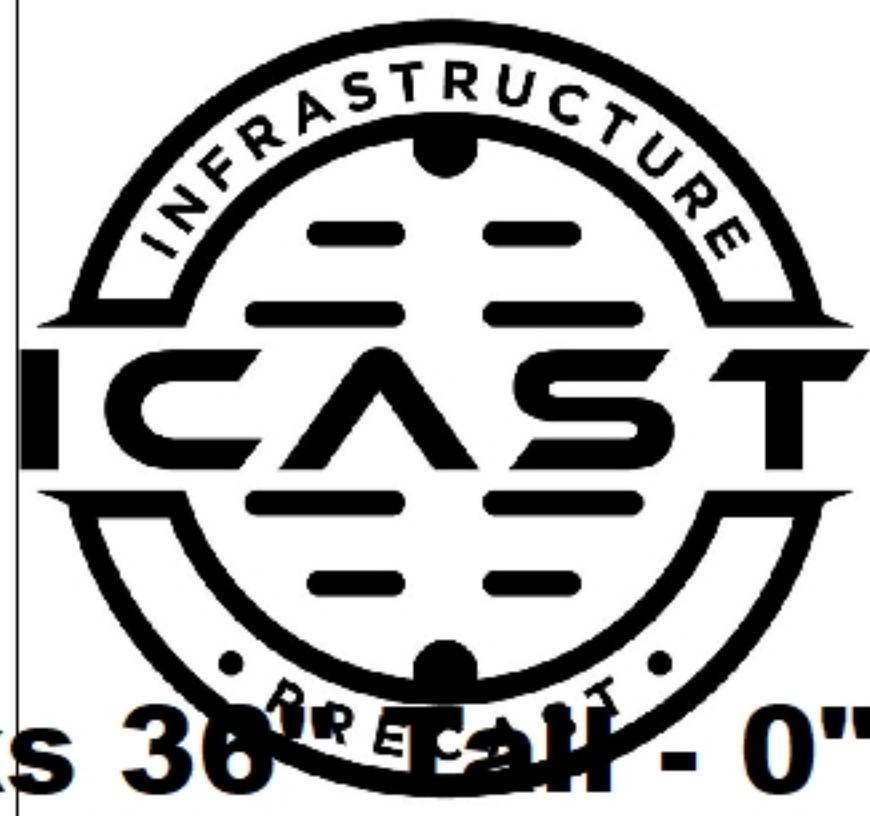

Structure ID: 36in INDOT MOD Barrier Wall - Modified INDOT 10 ft barrier wall
P4 MBI-TCCB-10-JJ-MOD Barrier Wall - Modified Indiana 10' Temporary Concrete Barrier Walls, w JJ Hooks 36" Tall - 0"

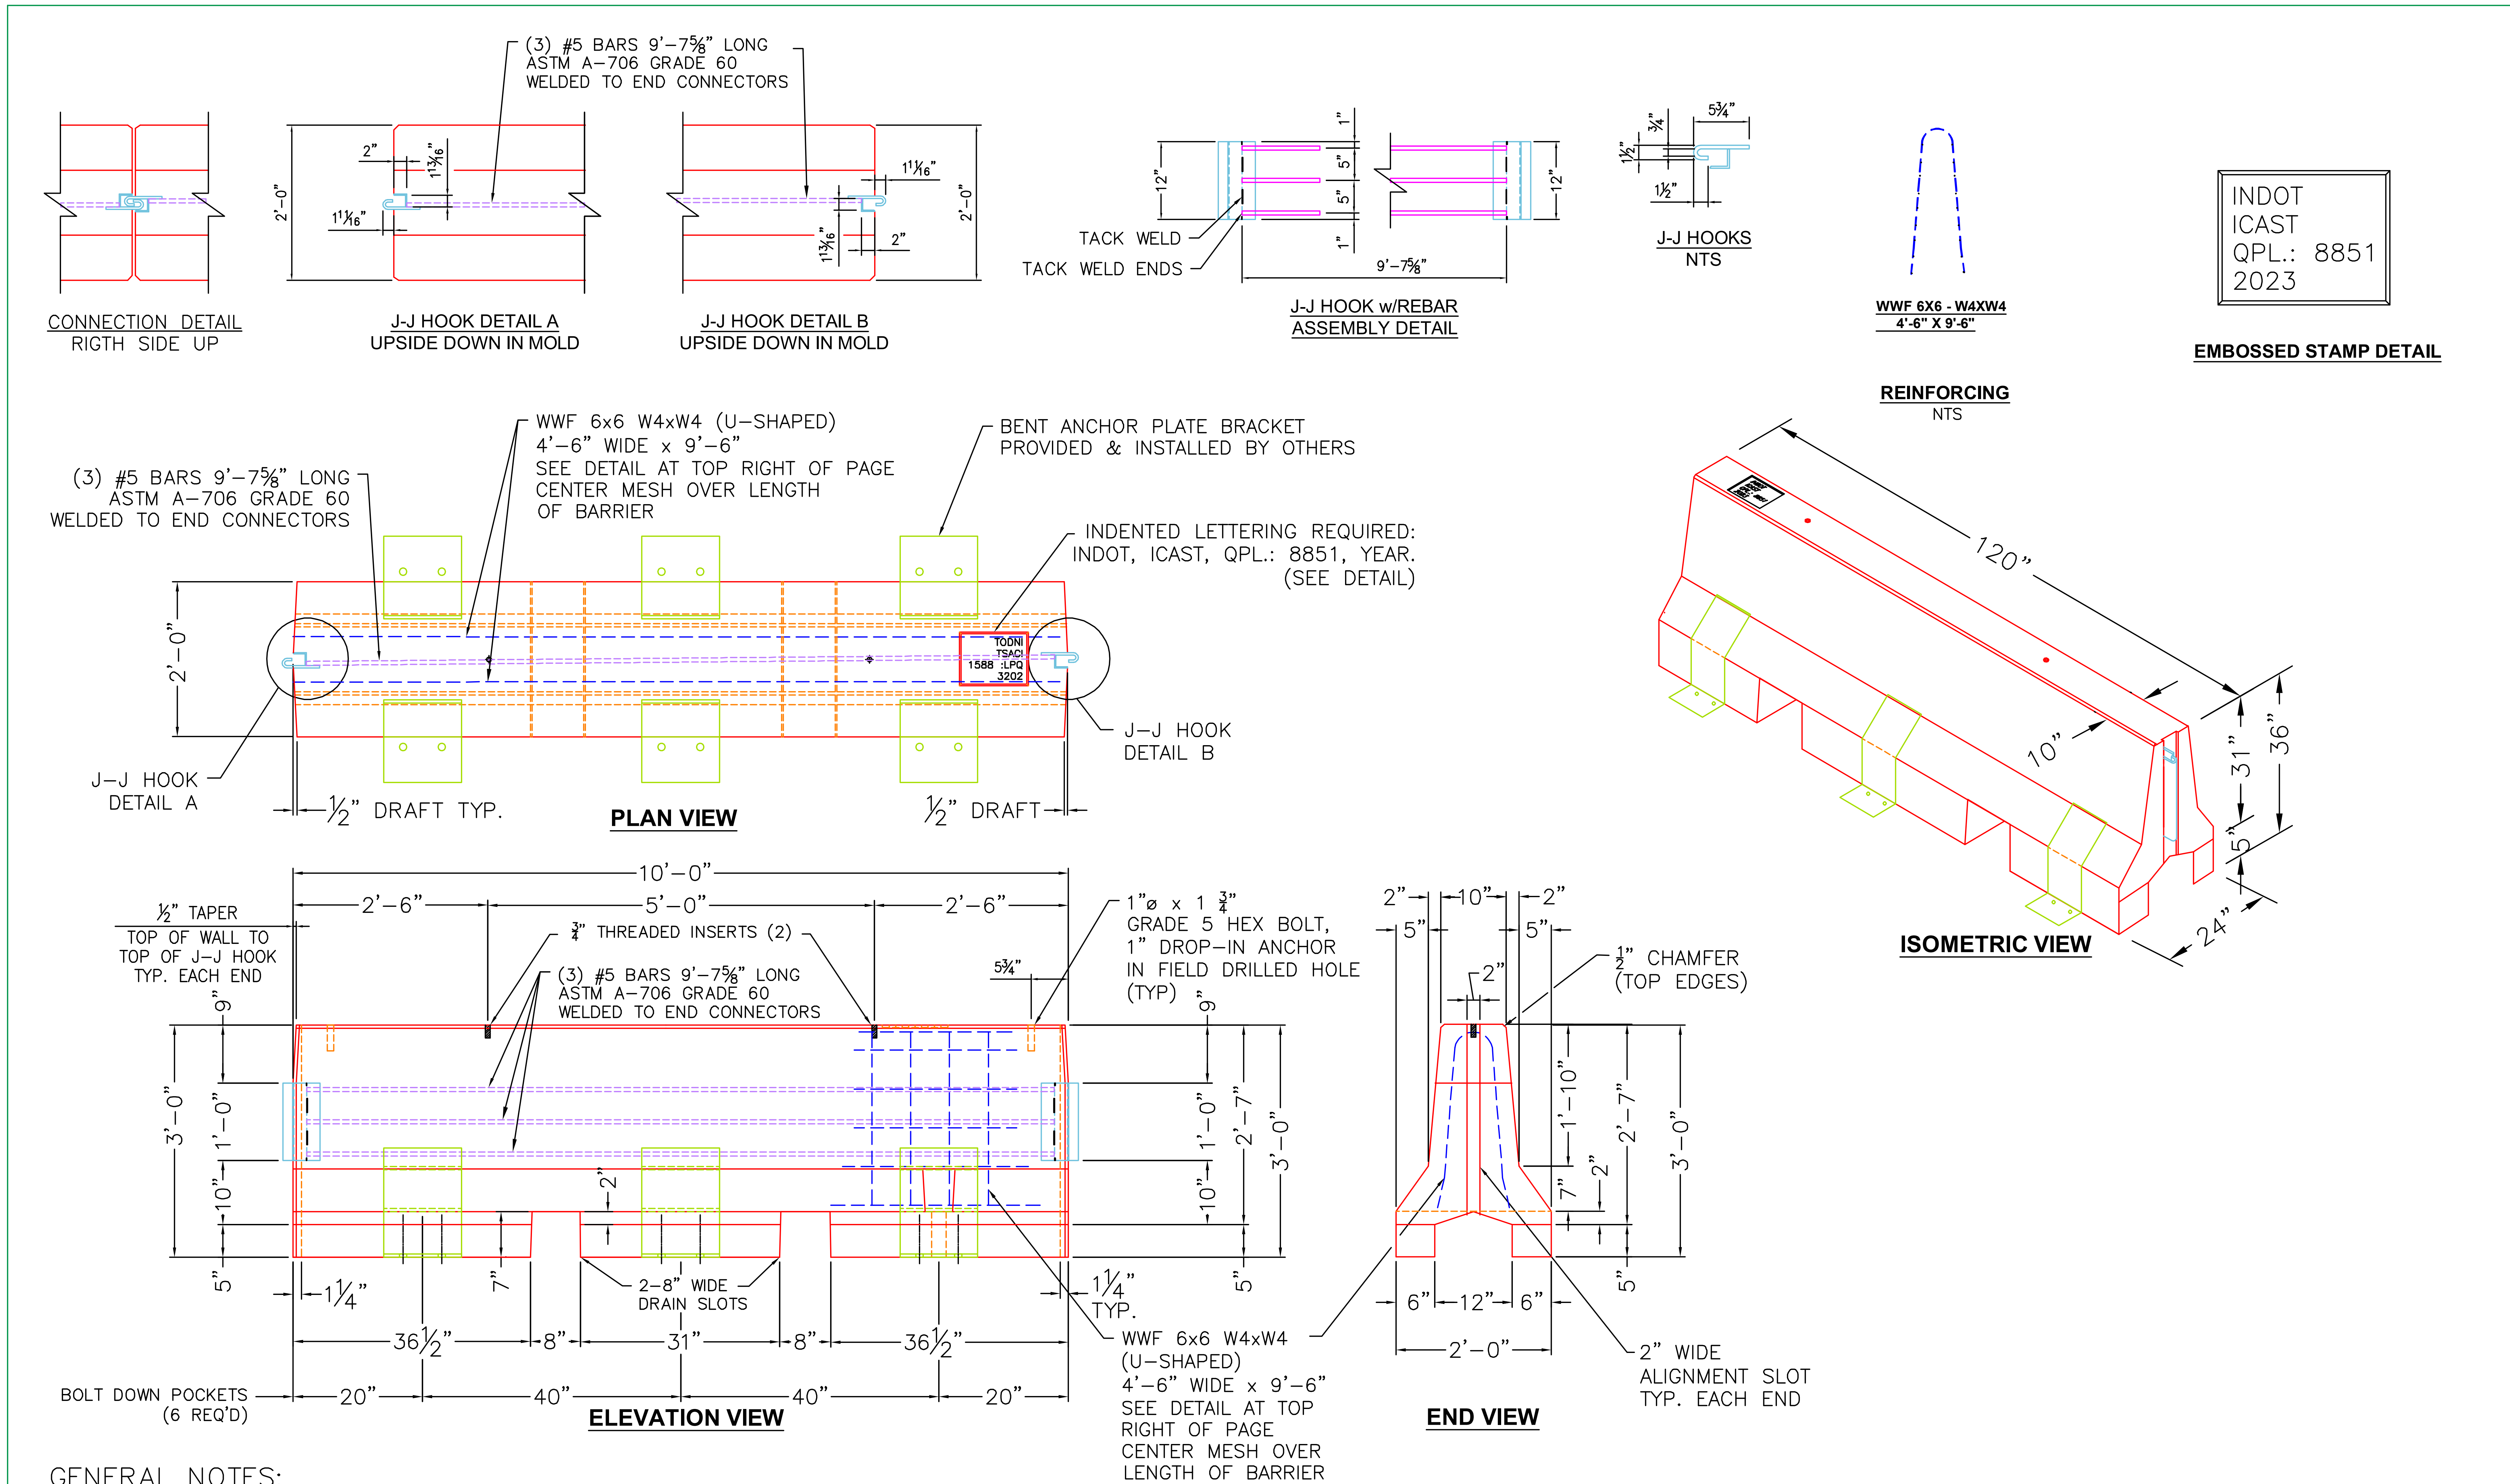

- GENERAL NOTES:
- 1. THE FOLLOWING STANDARD SPECIFICATIONS APPLY:
 - a. REINFORCING PER ASTM A-706 (GRADE 60).
 - b. STEEL: ASTM A-36 (PLAIN/MILL FINISH).
 - 2. MINIMUM 2" CONCRETE COVER ON REINFORCING BARS.
 - 3. CONCRETE: 4500 PSI @ 28 DAYS WITH AIR ENTRAINMENT.
 - 4. 1/2" CHAMFER ON ON TOP EDGES OF WALL REQUIRED.
 - 5. WEIGHT: 7,917 LBS.

INFRASTRUCTURE PRECAST, INC.
981 WEST 7TH ST., BEAVER DAM, KY. 42320
PHONE: (270) 363-2238, FAX: (270) 298-7424

MODIFIED INDOT ANCHORED TEMPORARY
CONCRETE BARRIER WALL

DWG: -	DATE: 07-08-26
REVIEWED BY: J.H. ROSS, PE	DRAWN BY: J. COPPAGE
WEB: WWW.ICASTINC.COM	SCALE: NTS

