

Contractor: Cleary Construction, Inc.

Plant: 100




Slack: 0"


2) Hole - 4

0 lb


Structure Total: 9080 lb

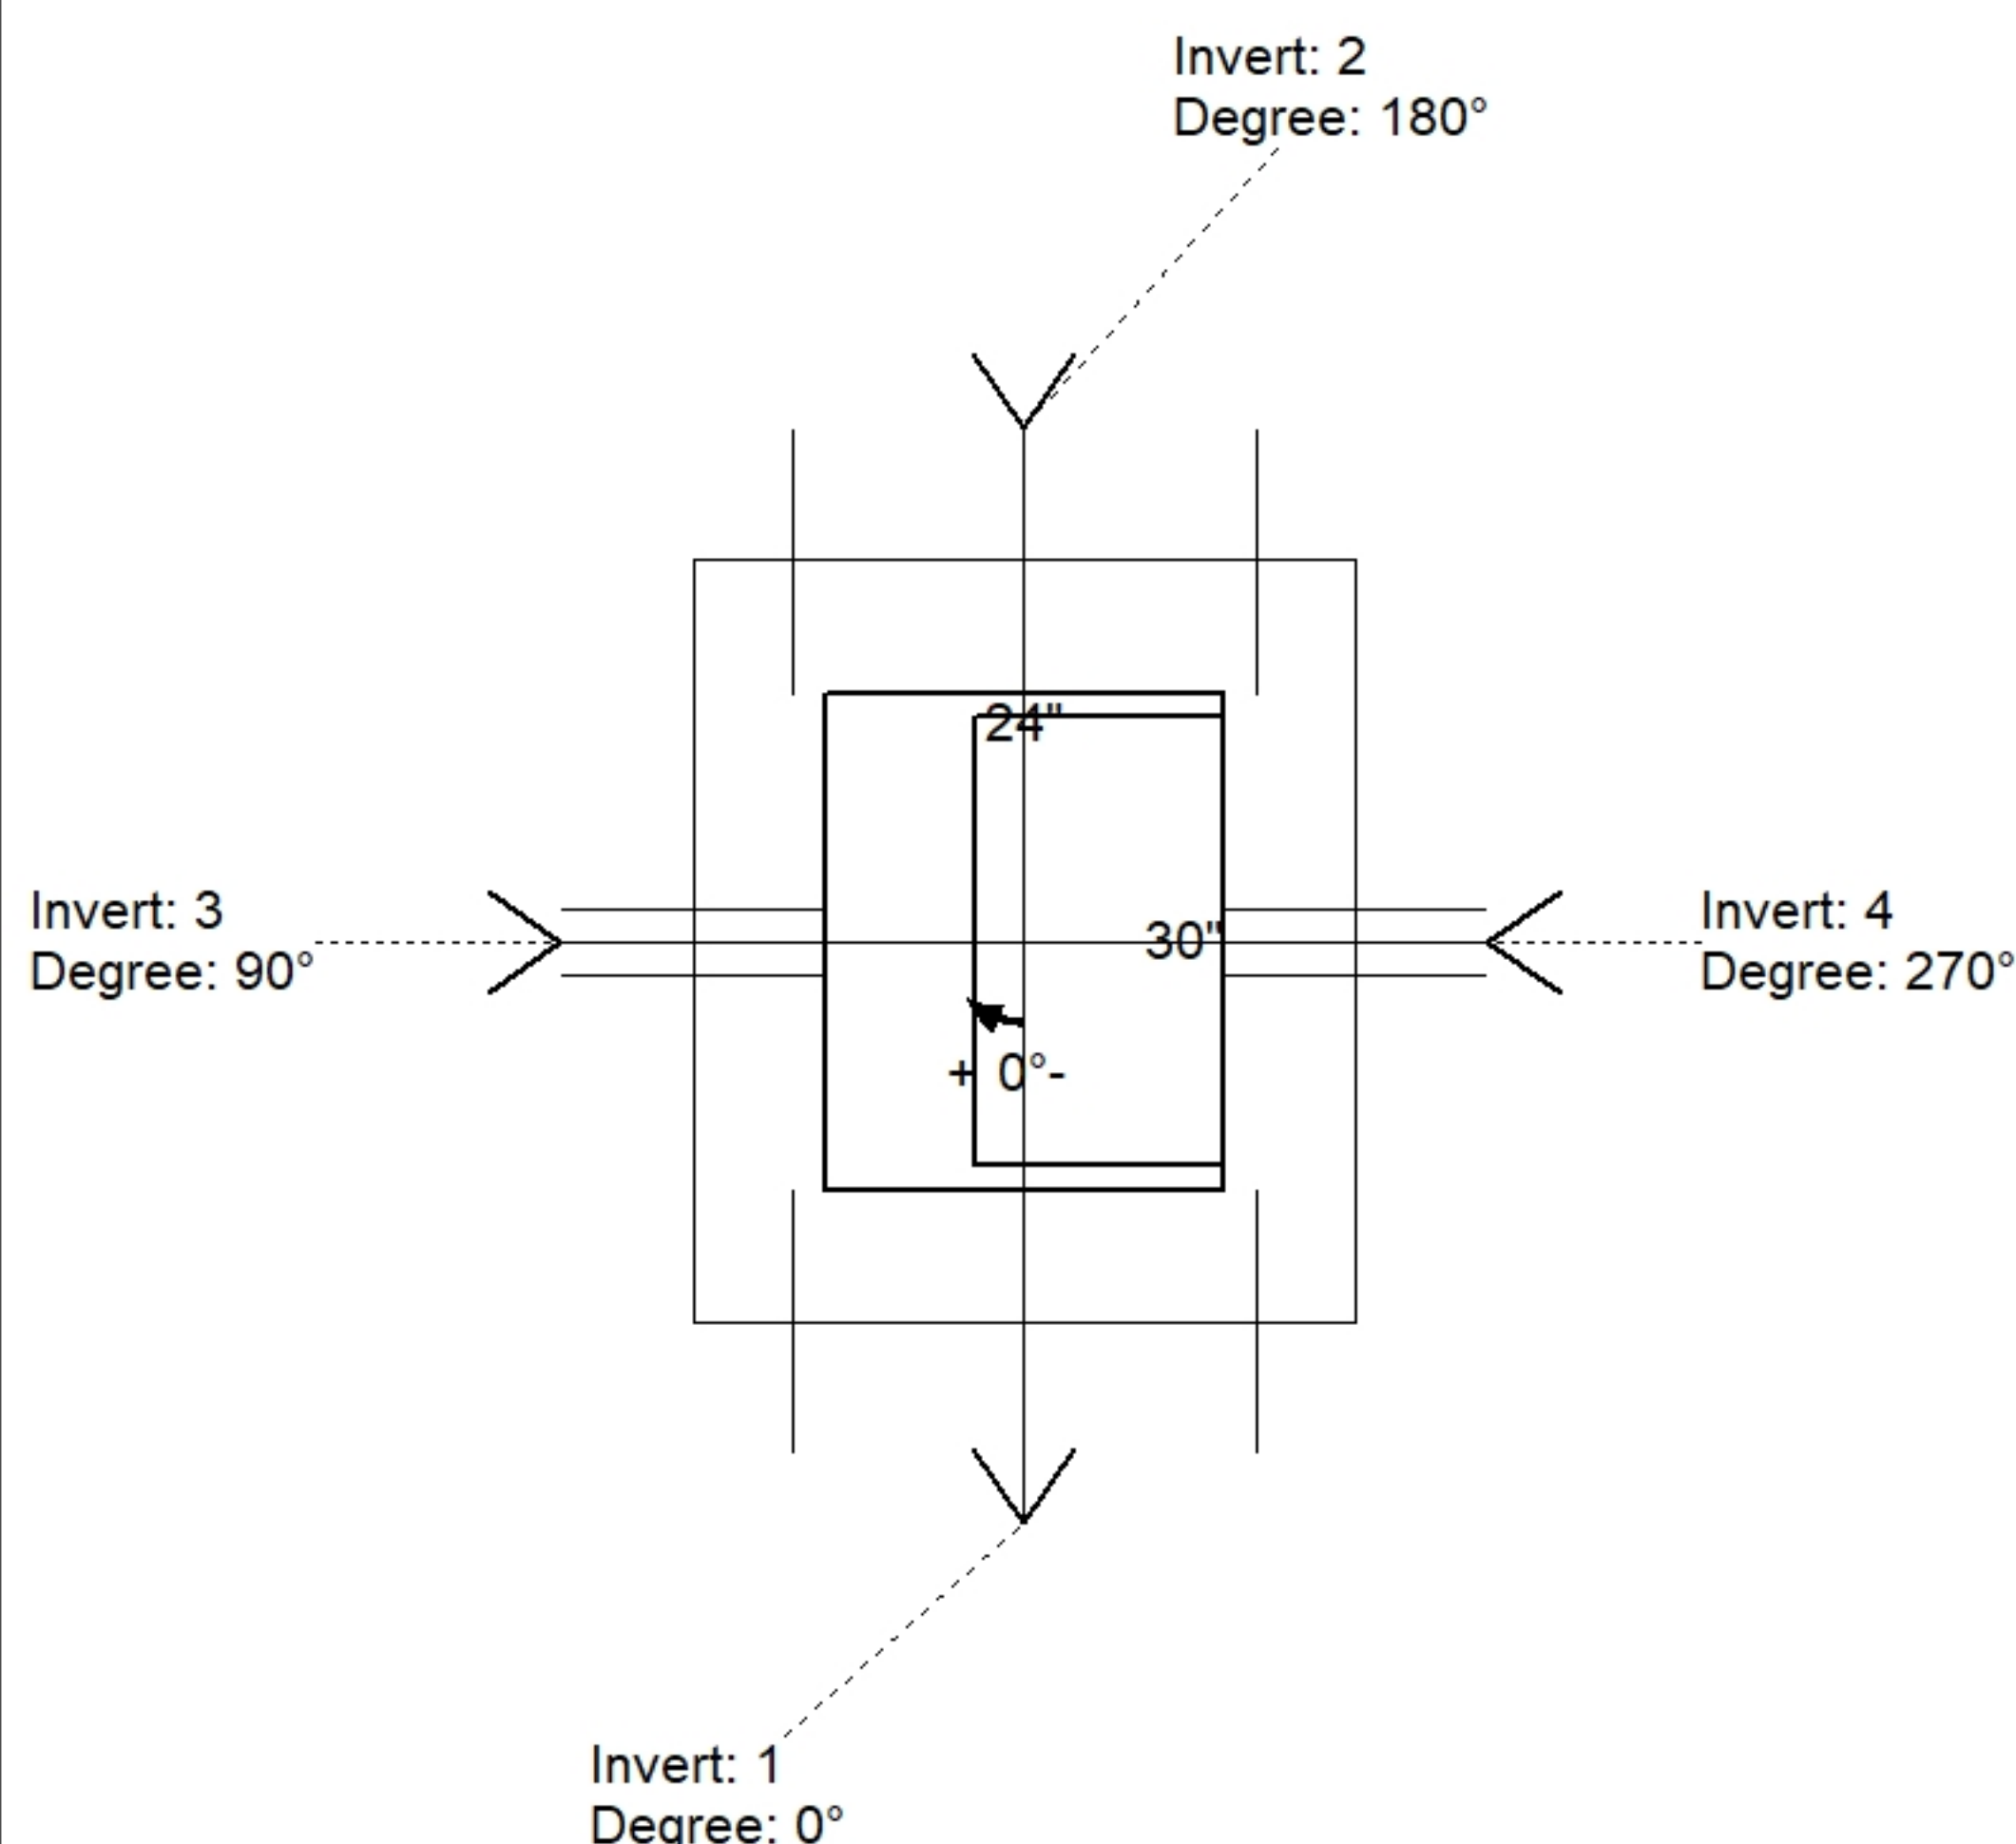

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (')	Ref
Rim	709.7'							
Reducer								
Invert 1	701.7'	0°	24" CMP	25"	28"	Hole 28	-2"	P1
Invert 2	701.78'	180°	24" CMP	25"	28"	Hole 28	-1"	P1
Invert 3	707.7'	90°	4" WEEP HOLE	4"	4"	Hole 4	26"	P2
Invert 4	707.7'	270°	4" WEEP HOLE	4"	4"	Hole 4	26"	P2
Invert 5								
Invert 6								
Invert 7								
Invert 8								

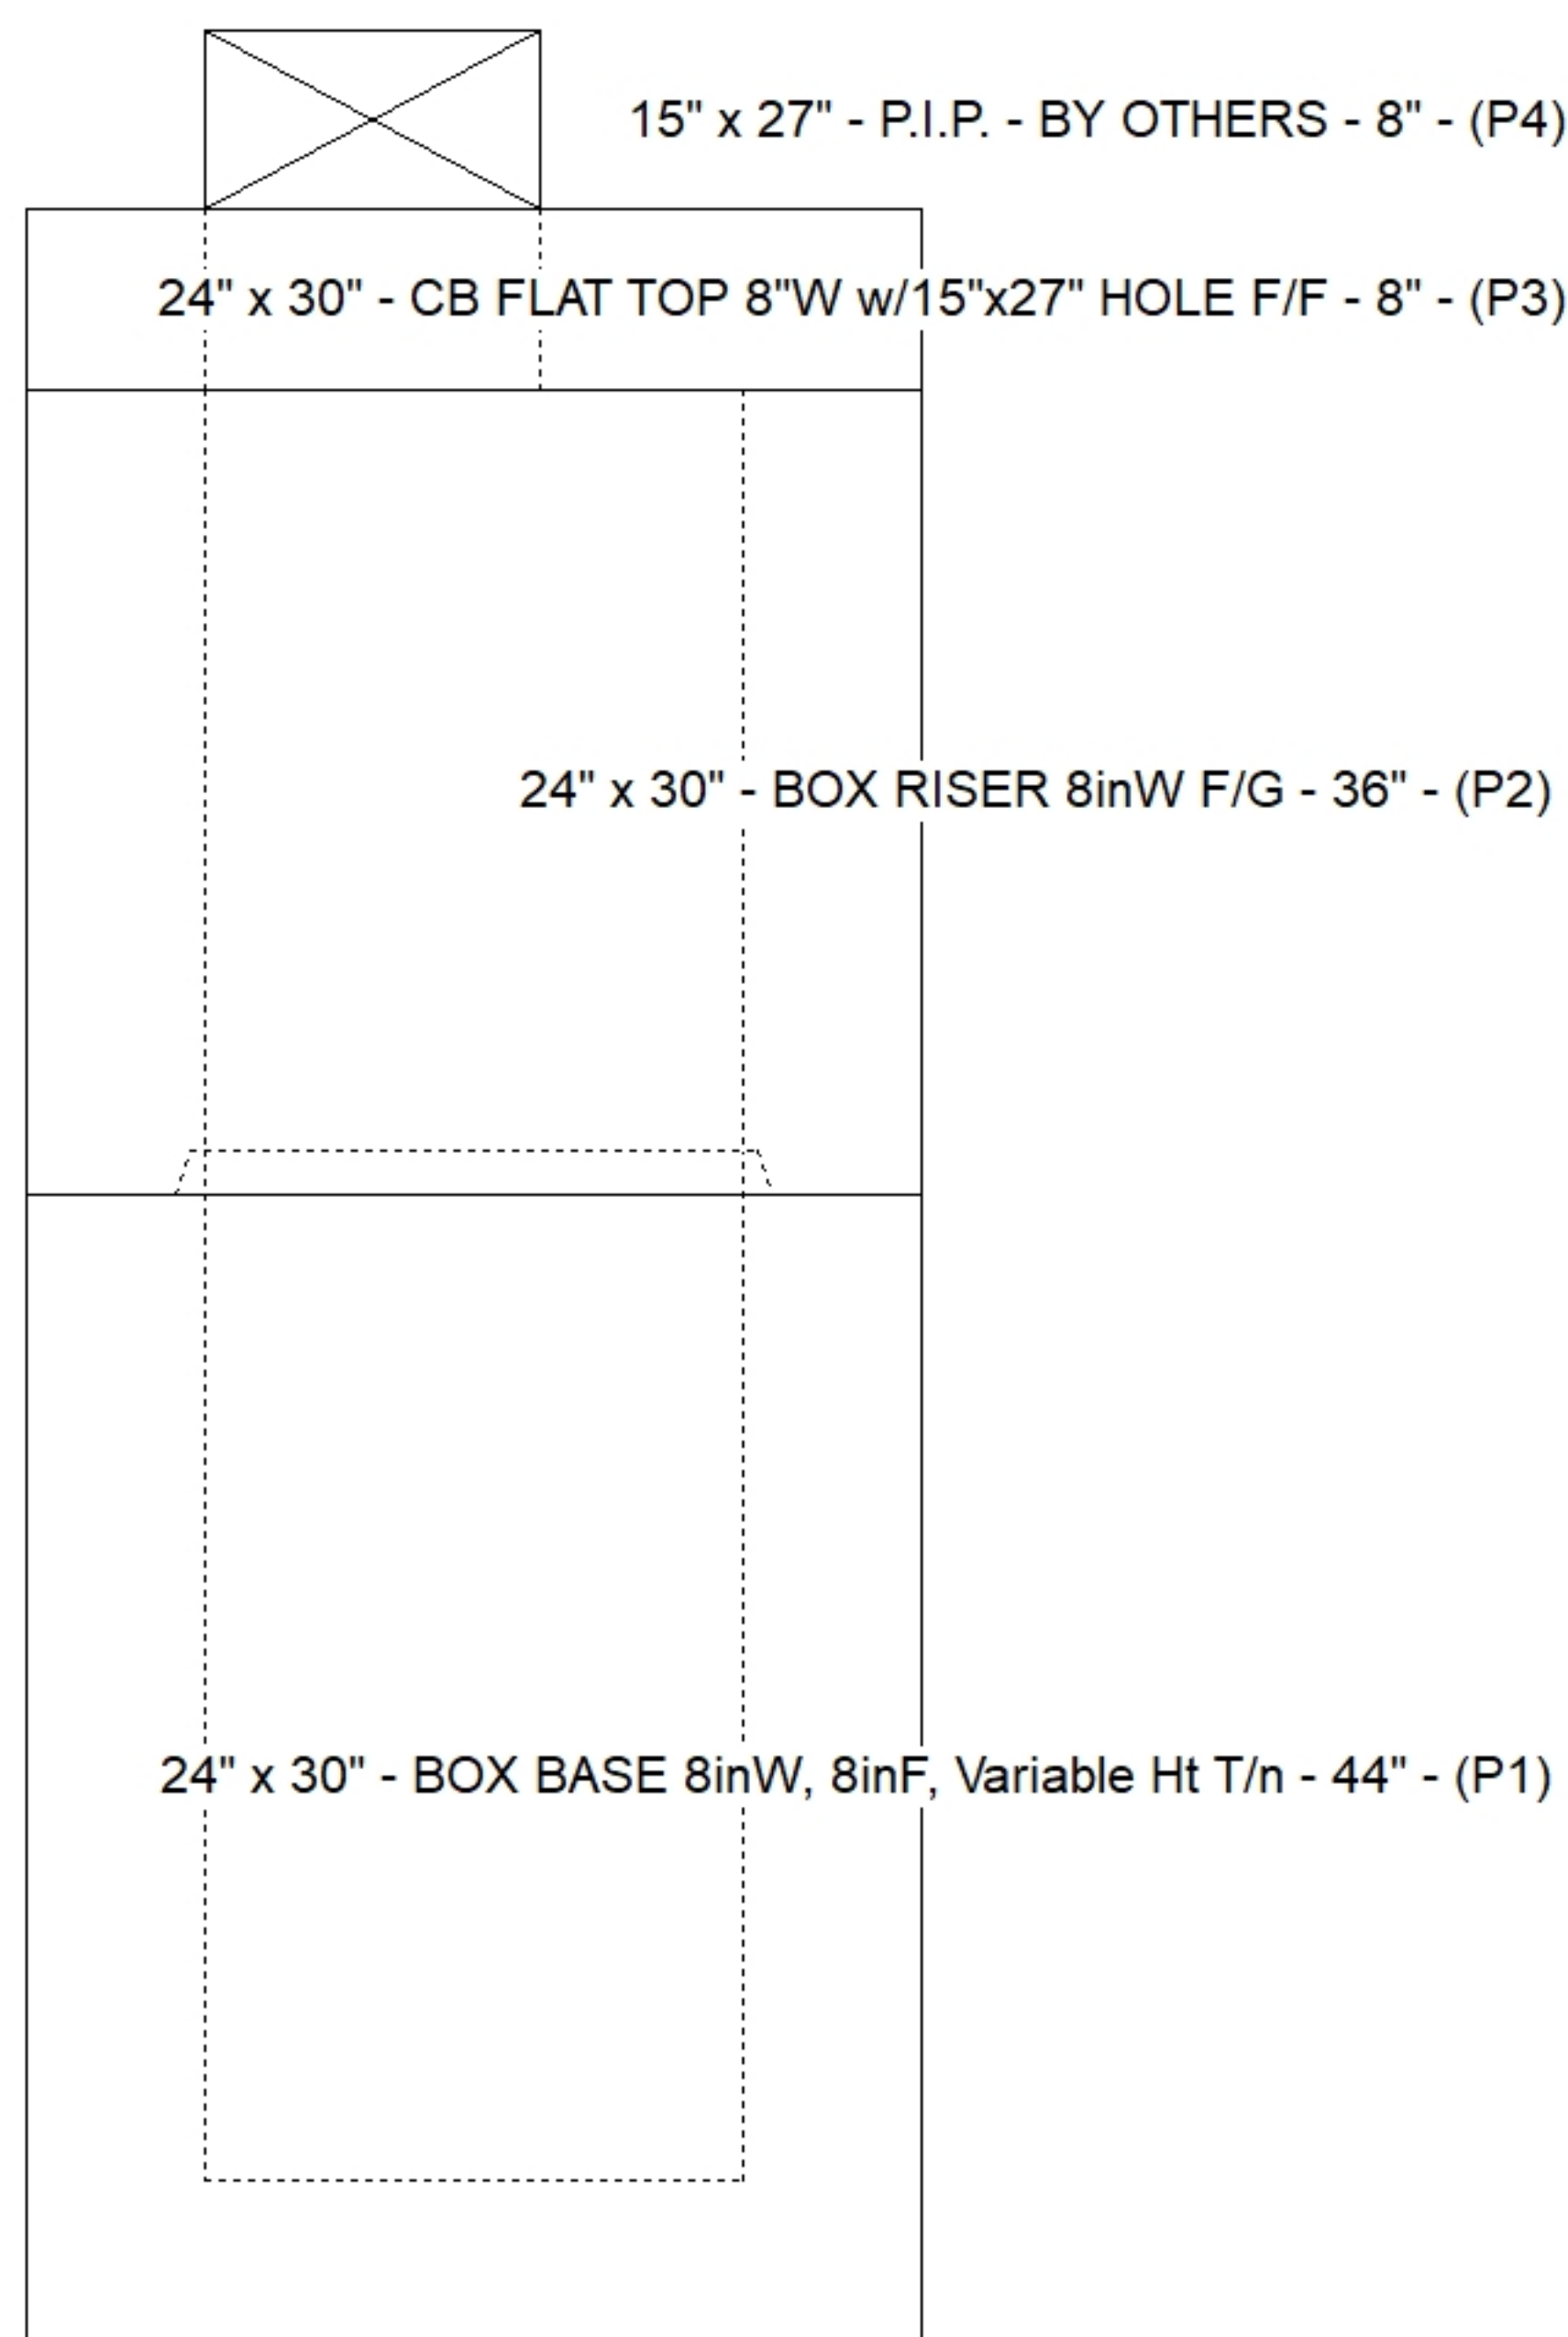

Cast (Int. Dim.) - Interior Dimensions

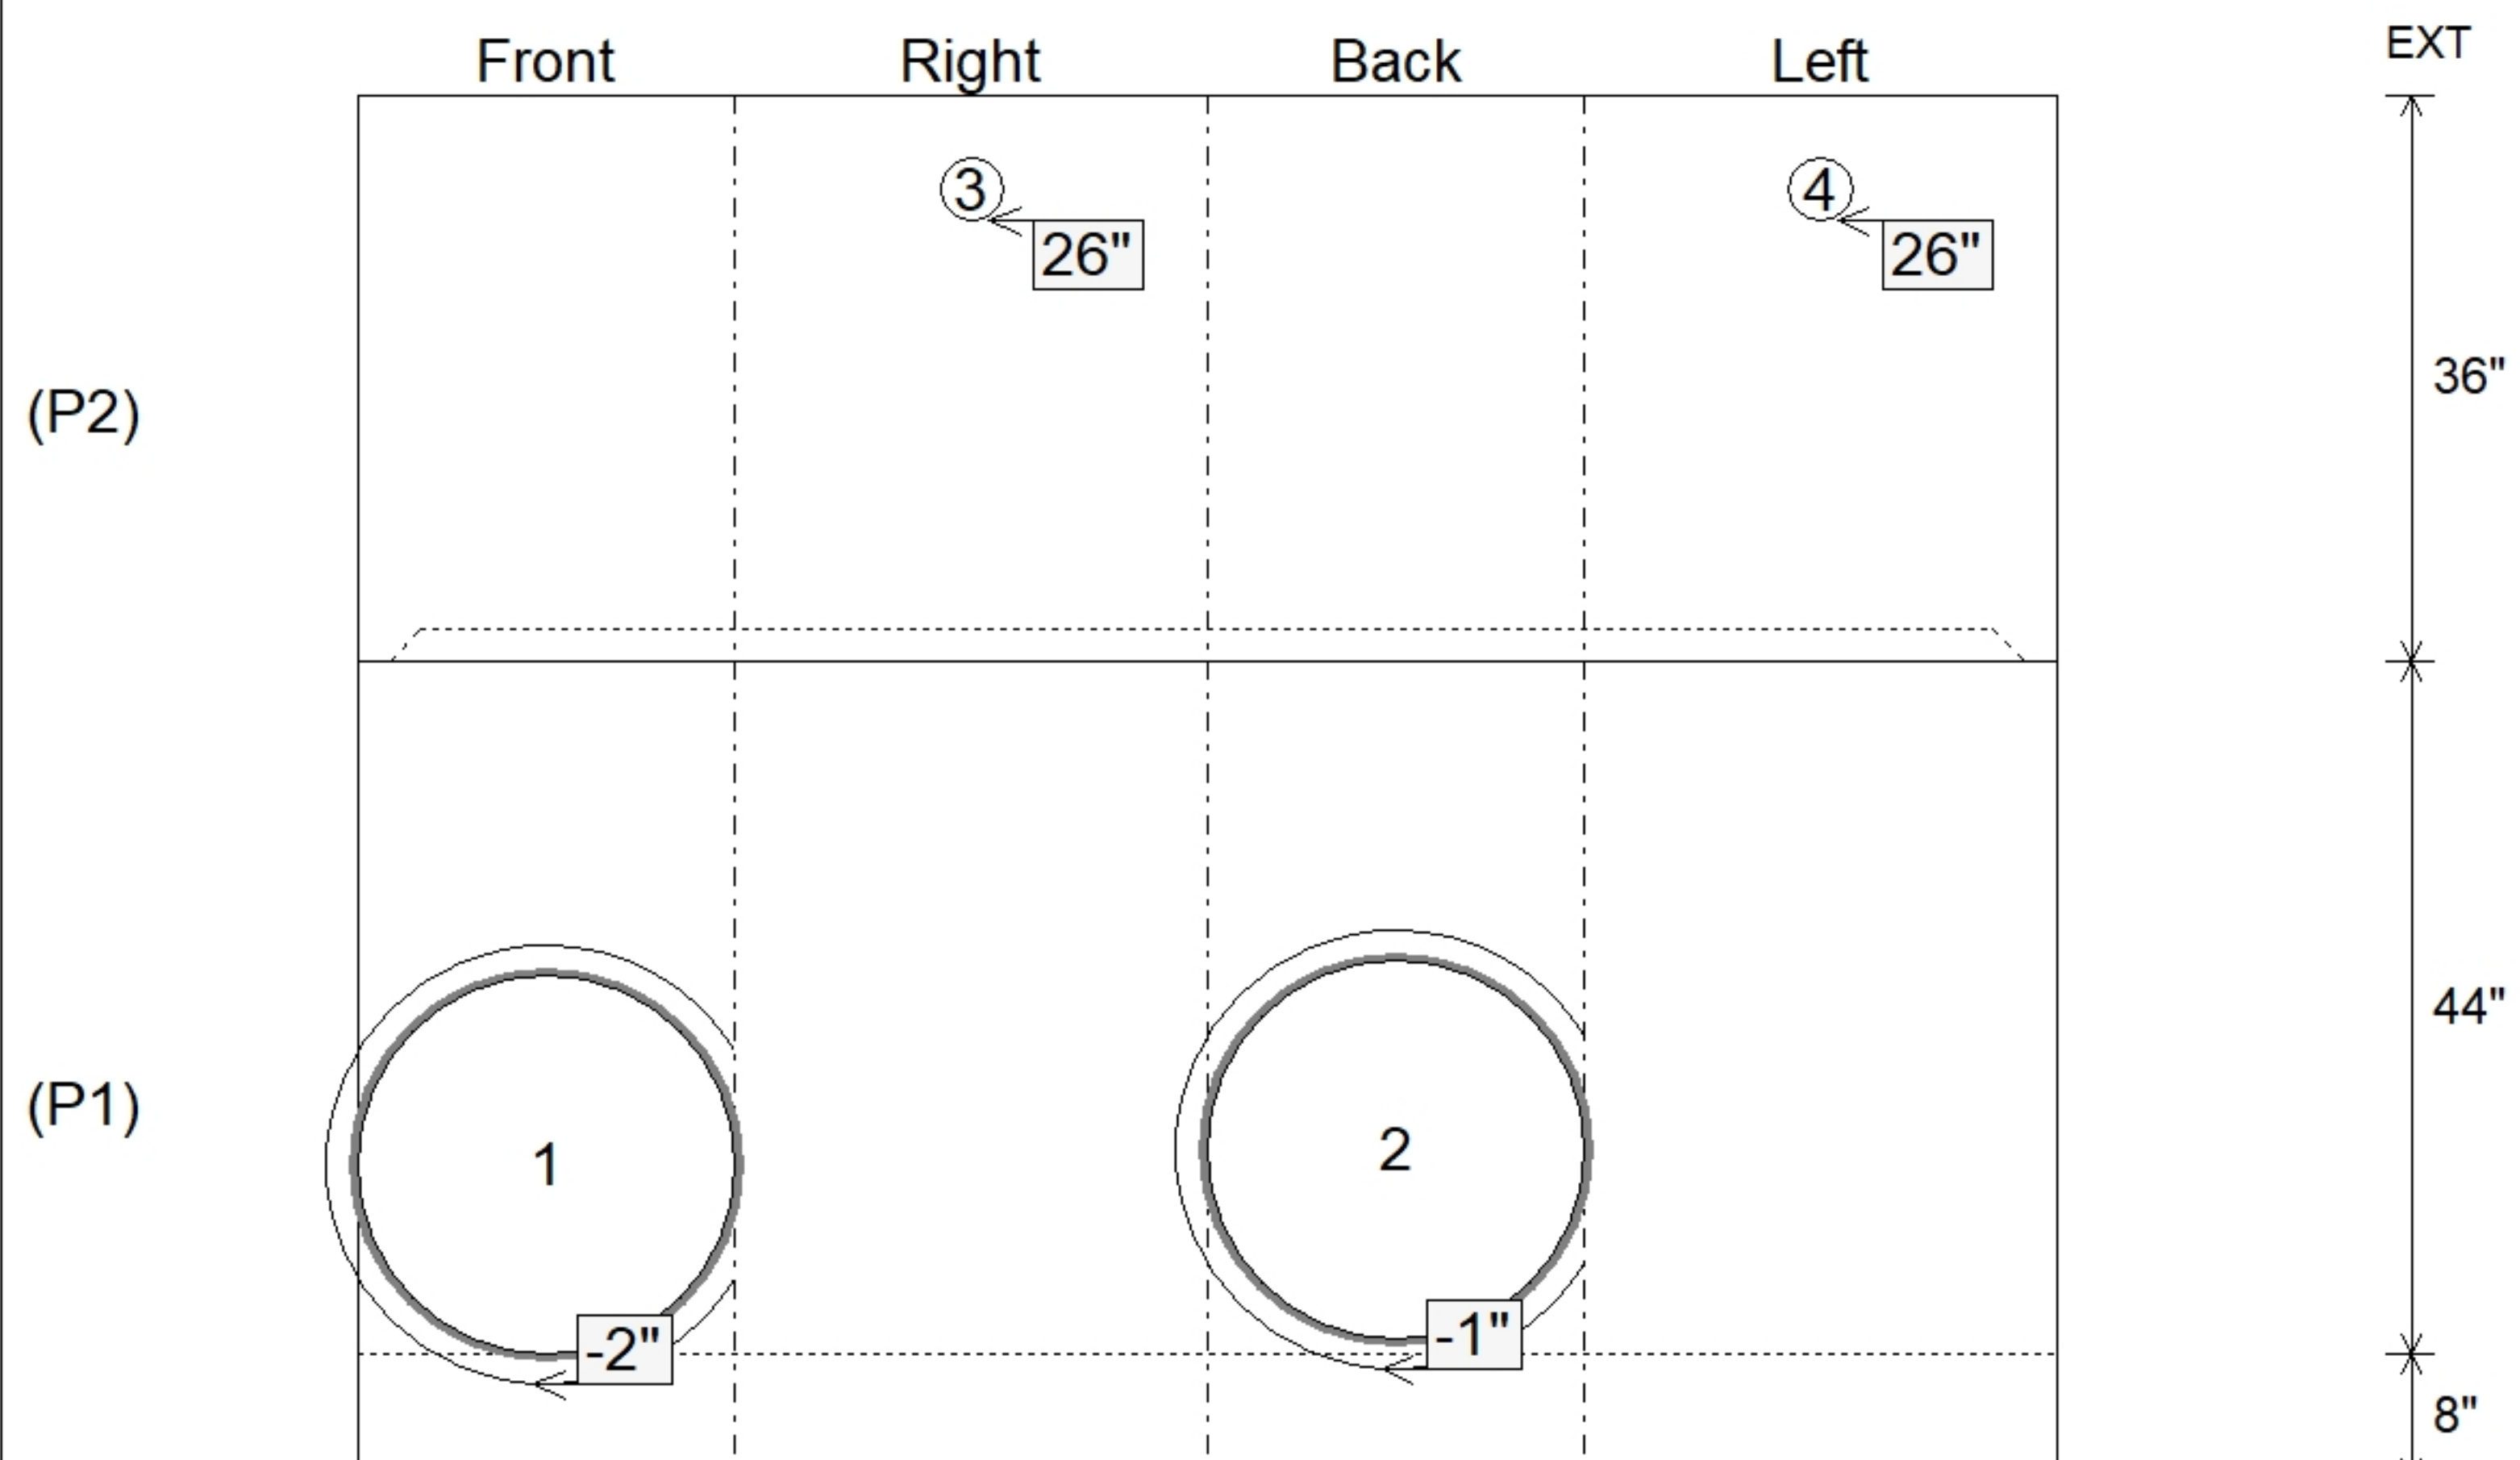

SUBMITTAL
APPROVED BY: