

Job Name: 26-3096 Saint Margaret Mary Parish Center

Job Location: Louisville, KY

Contractor: St. Margaret Mary Catholic Church c/o H&W Landwork

Plant: Beaver Dam

7/27/2026 9:05:52 AM

Tech: S. Felletter

PC: T. Lewis



Structure ID: PR CB ST-CB

P1 BX2436-08BVF

BOX BASE 8inW, 8inF, Variable Ht F/n

P2) 24" x 36" - CASTING HEIGHT - 4"

P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 31"

1) CASTING - HOE 518 F/G

1) 24" x 36" - Conseal CS-102 1.00"

1) Hole - 16

0 lb

4424 lb

354 lb

0 lb

0 lb

Structure Total: 4778 lb

Structure Notes:

1. PER ASTM C913 SPECIFICATIONS.

2. CONCRETE = 4,000 PSI AT 28 DAYS.

3. CASTING BY ICAST (HOE 518 F/G).

.

REINFORCING PER ASTM A615 (GRADE 60).

- WALLS (As .12) #5 BARS AT 12" C.C.E.W.

- FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

Rim: 560'

Rim to Invert: 3'


Slack: 2.25"

Sump: 1.25"


Step Position: 90°

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (⌵)	Offset
Invert 1	557'	0°	20"	12" HDPE	14.5"	Hole 16	16"	16"	0"	0"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

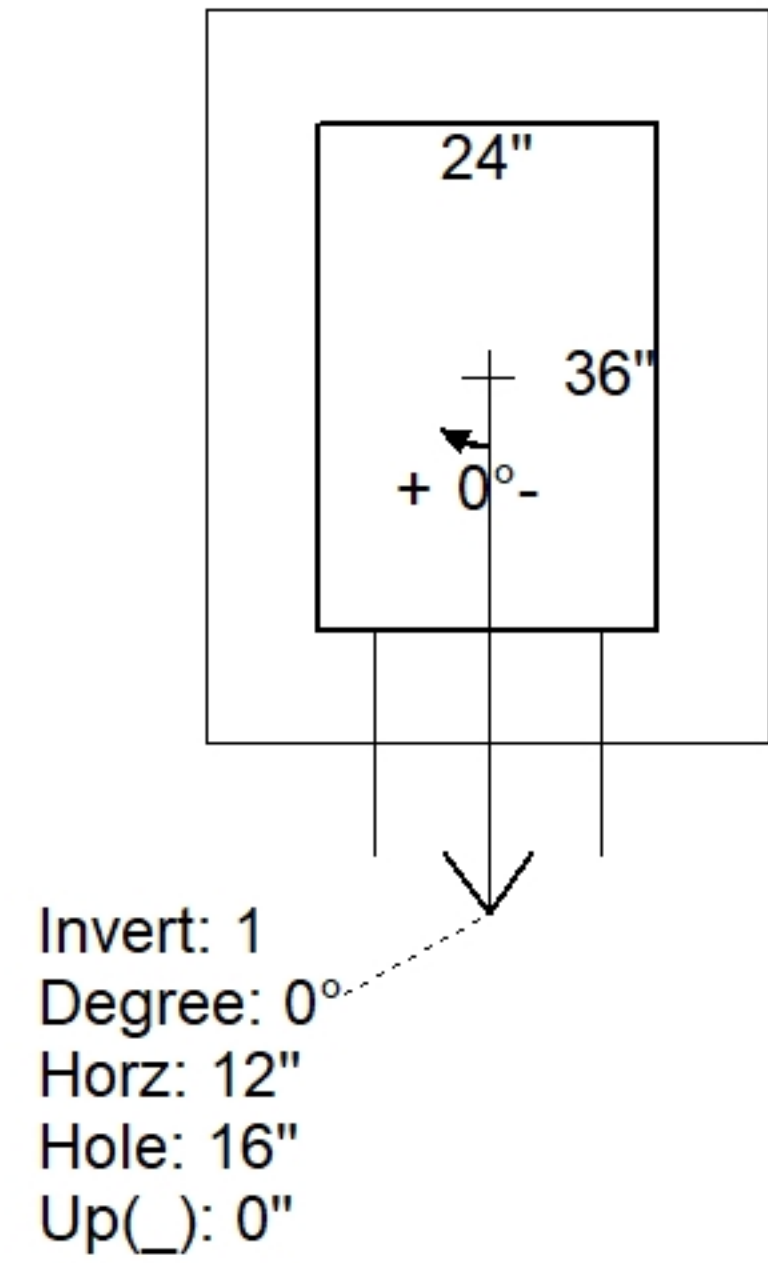

UPSIDE-DOWN VIEW (int. dimensions)

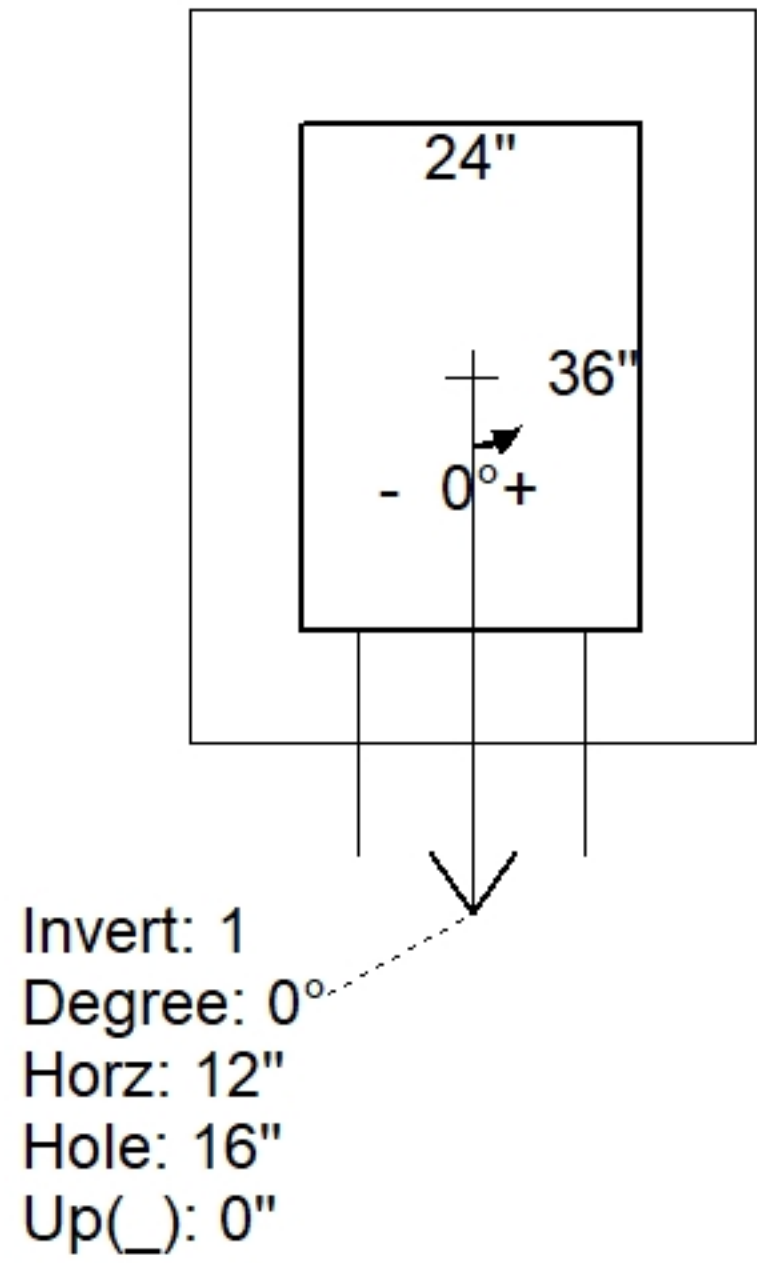

INSIDE WALL DIMENSIONS

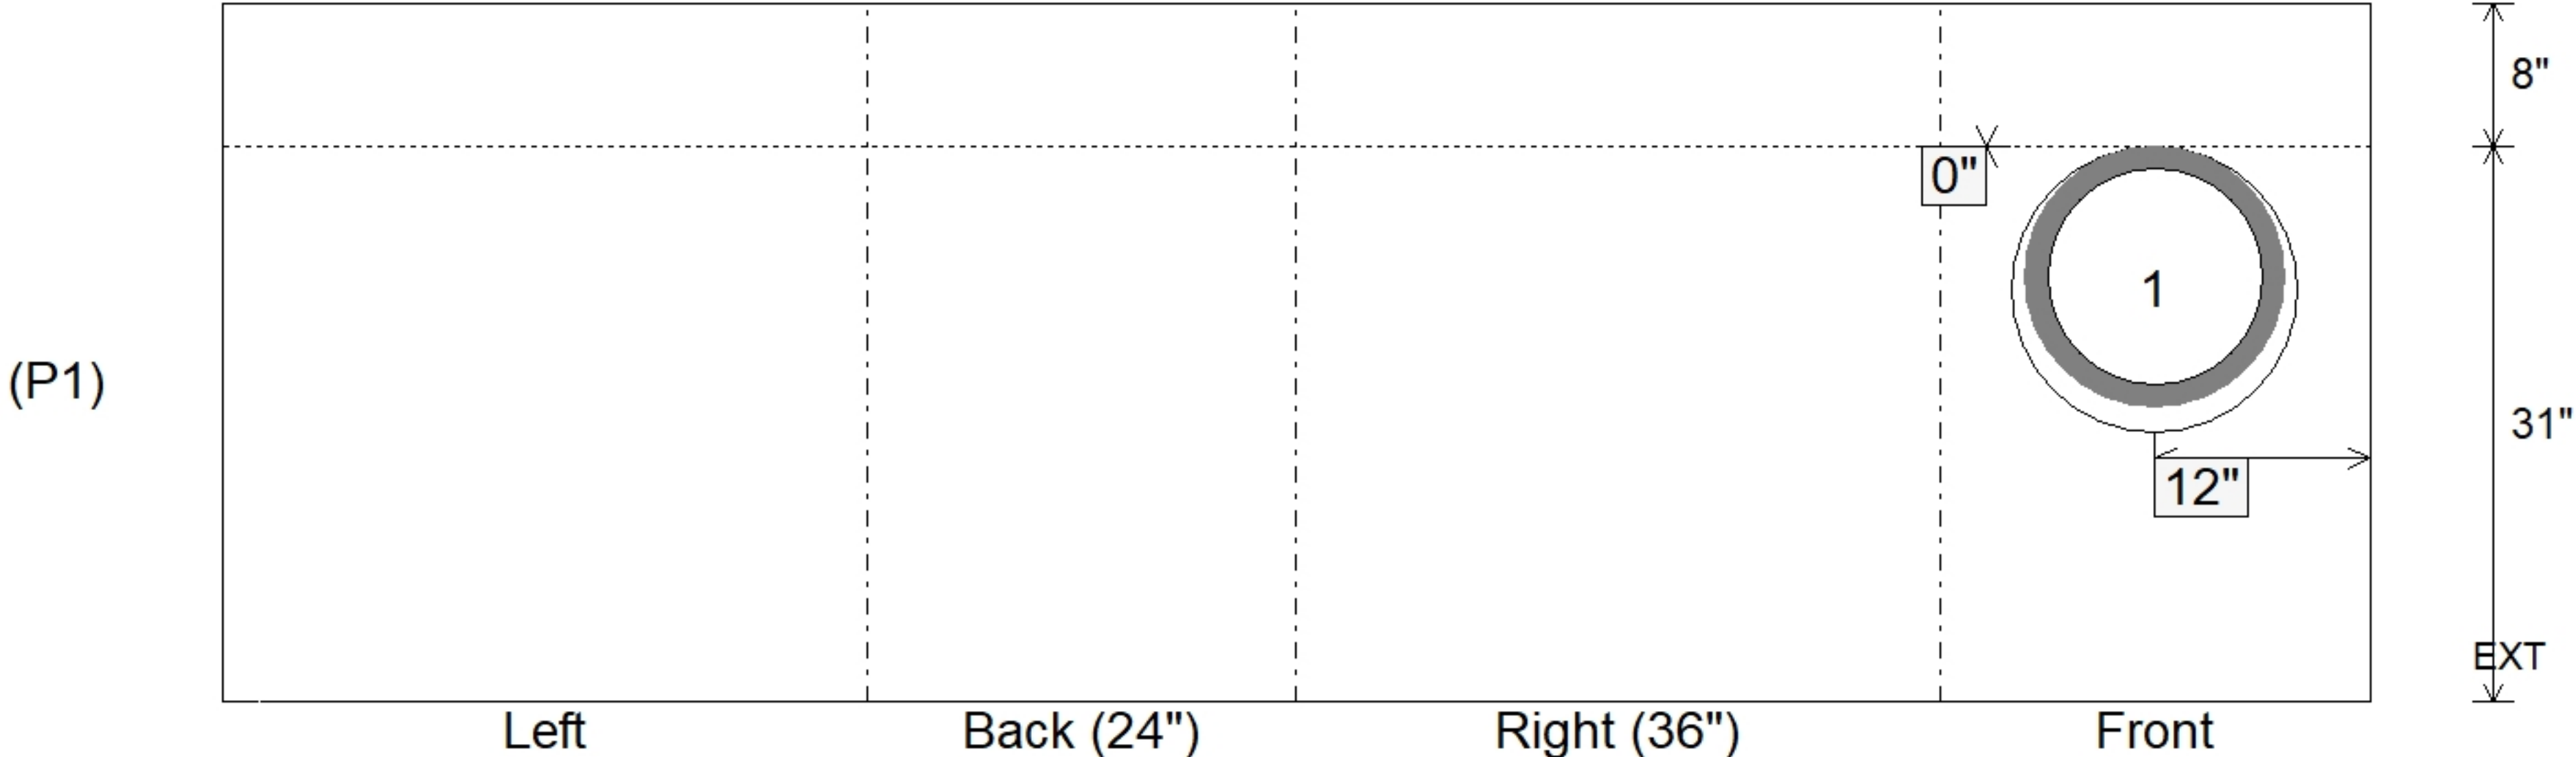

Coating (Int):

Coating (Ext):

Seam Up: Flat

Seam Dn: n/a

Wall Thickness: 8"

Floor Height: 8"

Height (Int): 31"

Height (Ext): 39"

Weight (Net): 4424 lb

Volume (Net): 1.13cu.yd