

Job Name: 26-3096 Saint Margaret Mary Parish Center
Job Location: Louisville, KY
Contractor: St. Margaret Mary Catholic Church c/o H&W Landwork

Plant: Beaver Dam
7/27/2026 9:06:48 AM

Tech: S. Felletter
PC: T. Lewis





Structure ID: PR DH MH ST-MHDH

P2 MH048LD12ECC

MH FLAT TOP w/ 24" ECC Hole F/G

- P3) 24" - CASTING HEIGHT - 7"
P2) 48" - MH FLAT TOP w/ 24" ECC Hole F/G - 12"
P1) 48" - MH DH RISER Custom Ht T/F - 29"
1) CASTING - HOE MC-420 F/C Storm LOU-MSD
1) 48" - Conseal CS-102 1.00"
1) 24" - Conseal CS-102 1.00"
2) DOGHOUSE - 12"x18"
1) Hole - 16
2) MH Step ML-10-TDS-NCR - 10"

- 0 lb
1561 lb
1776 lb
340 lb
0 lb
0 lb
0 lb
0 lb
0 lb
0 lb
Structure Total: 3677 lb
- Structure Notes:
1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. CASTING BY ICAST (HOE MC-420 F/C "STORM" LOU-MSD).
REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- RISER (As .12)

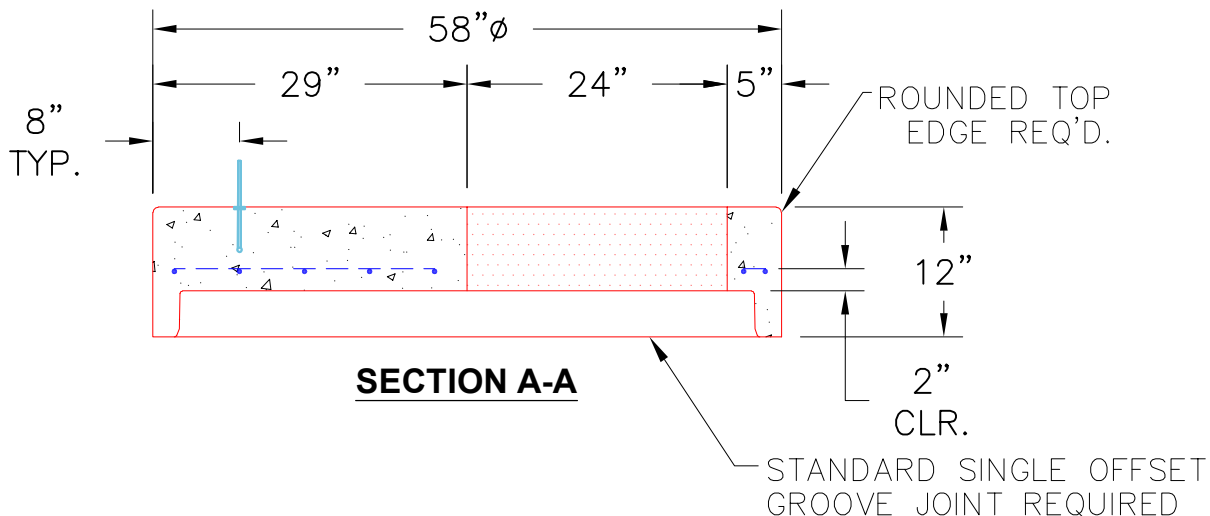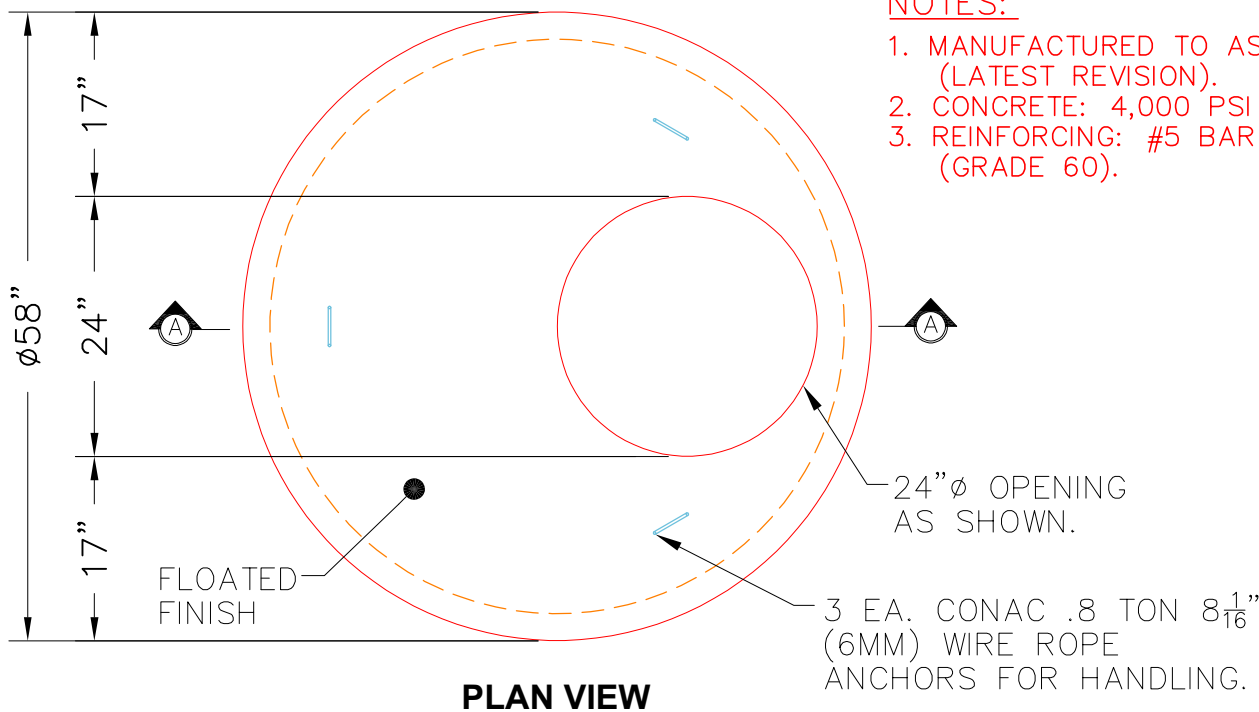

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 12"	Weight (Net): 1561 lb Volume (Net): 0.42cu.yd
----------------------------------	----------------------------------	--------------------	-------------------	--