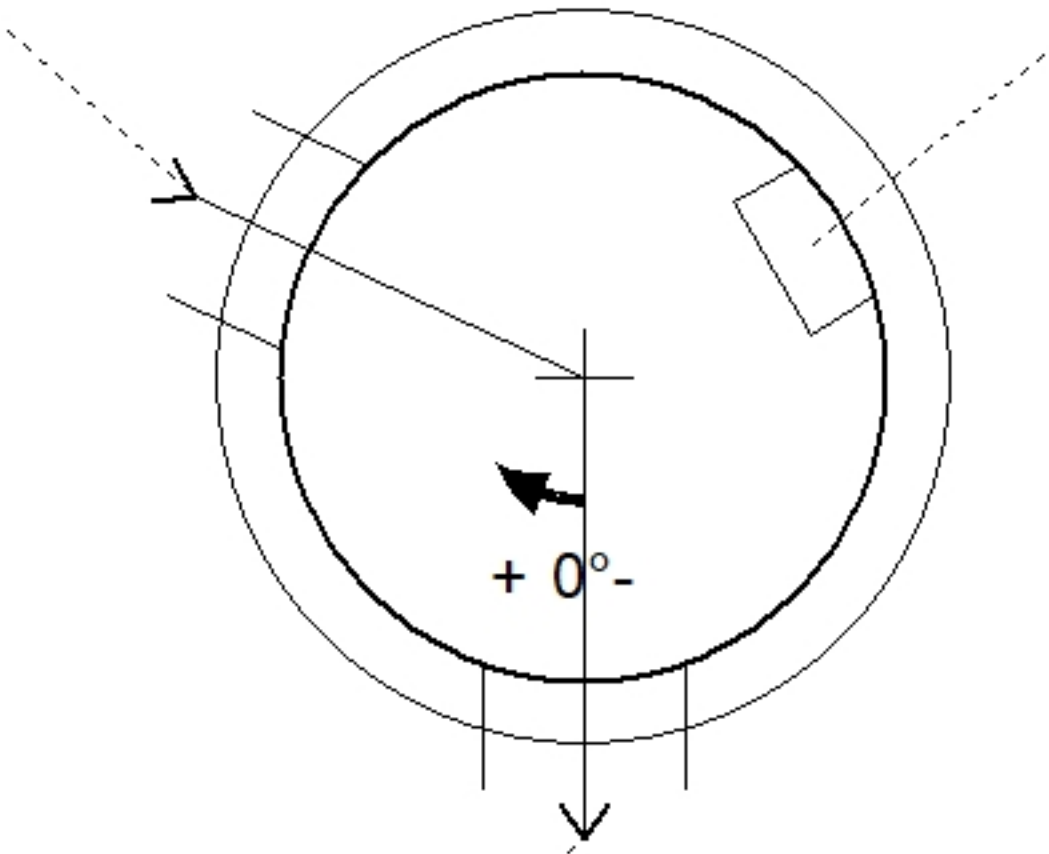
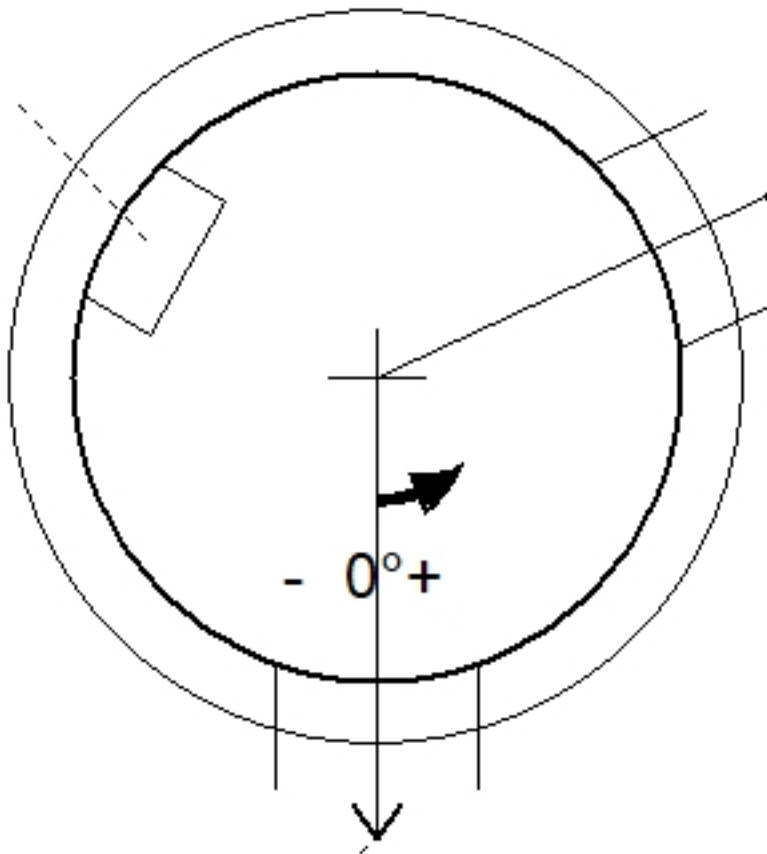
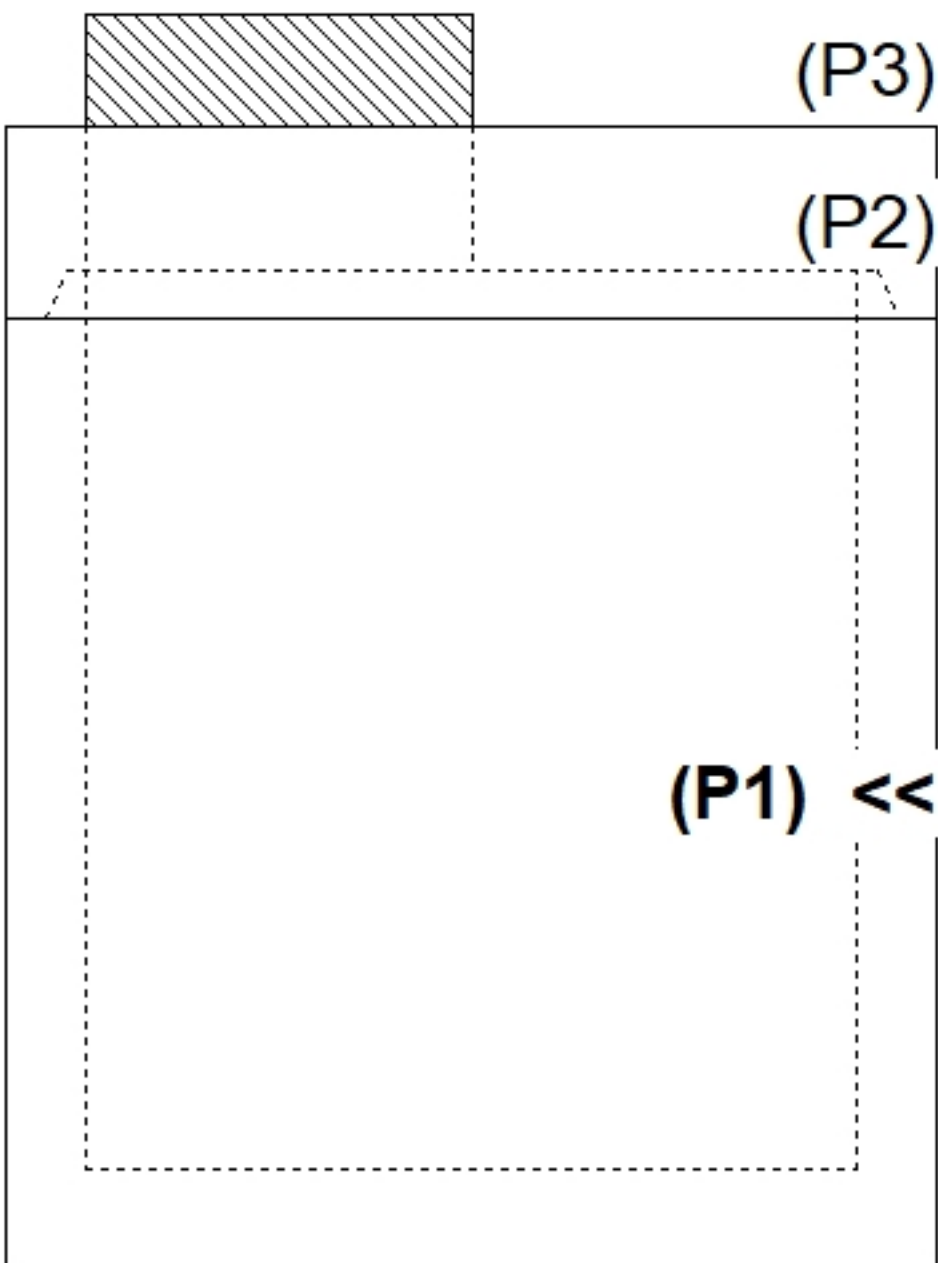
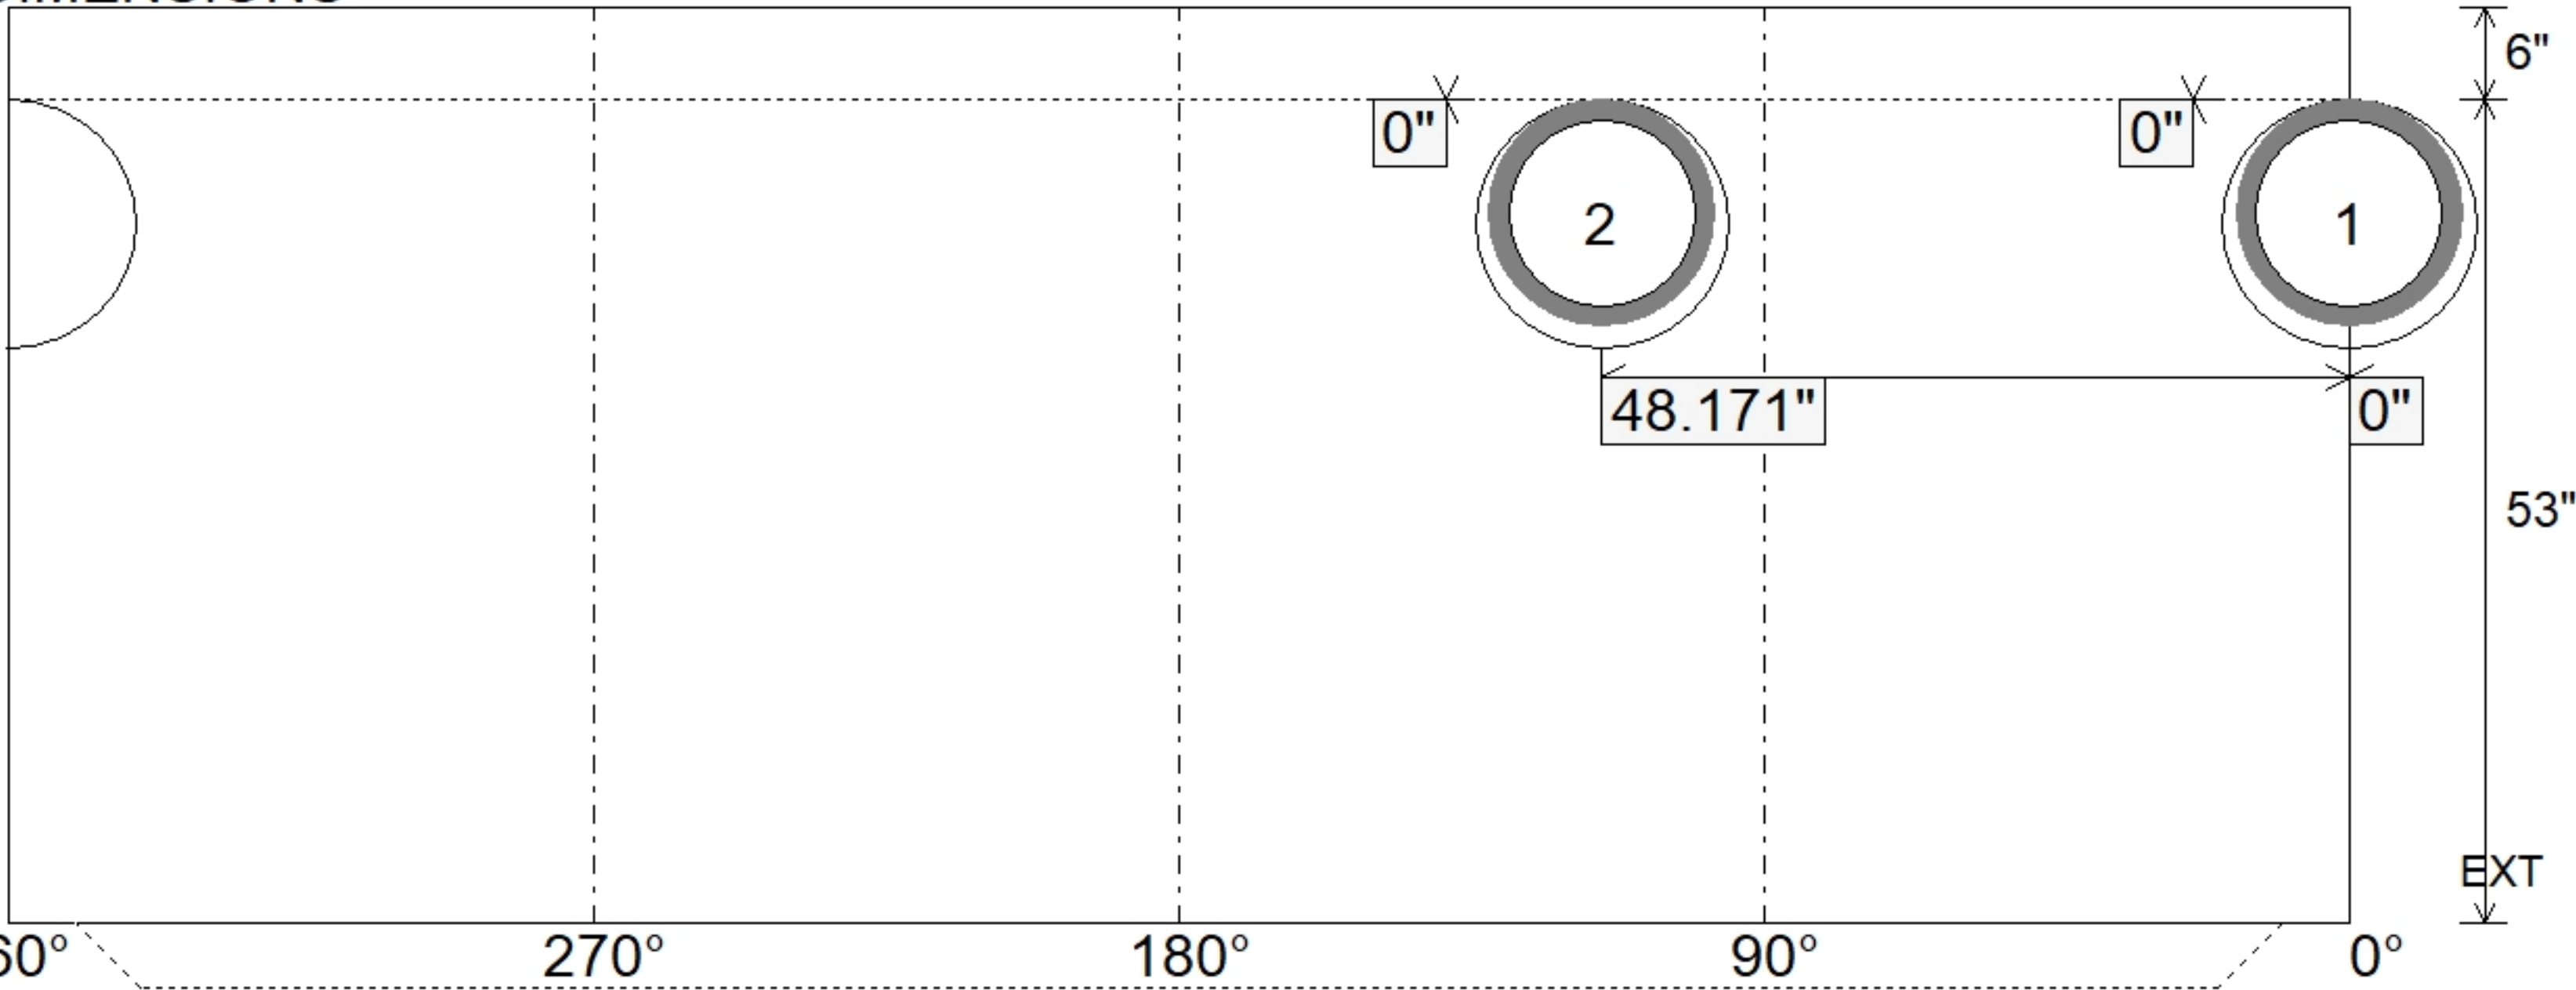


Job Name: 26-3096 Saint Margaret Mary Parish Center Job Location: Louisville, KY Contractor: St. Margaret Mary Catholic Church c/o H&W Landwork					Plant: Beaver Dam 7/27/2026 9:05:51 AM		Tech: S. Felletter PC: T. Lewis				
Structure ID: PR MH 1 ST-MH											
P1			MH048BAVF			MH BASE Custom Ht T/n					
P3) 24" - CASTING HEIGHT - 7" P2) 48" - MH FLAT TOP w/ 24" ECC Hole F/G - 12" P1) 48" - MH BASE Custom Ht T/n - 53" 1) CASTING - HOE MC-420 F/C Storm LOU-MSD 1) 48" - Conseal CS-102 1.00" 1) 24" - Conseal CS-102 1.00" 2) Hole - 16 4) MH Step ML-10-TDS-NCR - 10"						0 lb 1561 lb 4861 lb 340 lb 0 lb 0 lb 0 lb 0 lb 0 lb Structure Total: 6762 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE MC-420 F/C "STORM" LOU-MSD). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 560.72' Rim to Invert: 6.03' Slack: 1.61" Sump: 1.25" Step Position: 240											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	554.69'	0°	0"	12" HDPE	14.5"	Hole 16	16"	16.312"	0"	0"	
Invert 2	554.69'	115°	58.207"	12" HDPE	14.5"	Hole 16	16"	16.312"	0"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimenions) Invert: 2 Degree: 115° Horz: 48.171" Hole: 16" Up(): 0" Step: 240° Horz: 100.531" Invert: 1 Degree: 0° Horz: 0" Hole: 16" Up(): 0"  Step: 240° Horz: 100.531" Invert: 2 Degree: 115° Horz: 48.171" Hole: 16" Up(): 0" Invert: 1 Degree: 0° Horz: 0" Hole: 16" Up(): 0"   (P1) << INSIDE WALL DIMENSIONS  Coating (Int): Coating (Ext): Seam Up: Tongue Seam Dn: n/a Wall Thickness: 5" Floor Height: 6" Height (Int): 53" Height (Ext): 59" Weight (Net): 4861 lb Volume (Net): 1.24cu.yd											