

Job Name: 26-3096 Saint Margaret Mary Parish Center
Job Location: Louisville, KY
Contractor: St. Margaret Mary Catholic Church c/o H&W Landwork

Plant: Beaver Dam

7/27/2026 9:06:47 AM

Tech: S. Felletter

PC: T. Lewis



Structure ID: PR MH 1 ST-MH



P2 MH048LD12ECC

MH FLAT TOP w/ 24" ECC Hole F/G

- P3) 24" - CASTING HEIGHT - 7"
P2) 48" - MH FLAT TOP w/ 24" ECC Hole F/G - 12"
P1) 48" - MH BASE Custom Ht T/n - 53"
1) CASTING - HOE MC-420 F/C Storm LOU-MSD
1) 48" - Conseal CS-102 1.00"
1) 24" - Conseal CS-102 1.00"
2) Hole - 16
4) MH Step ML-10-TDS-NCR - 10"

Structure Total:

- 0 lb
1561 lb
4861 lb
340 lb
0 lb
0 lb
0 lb
0 lb
6762 lb
- Structure Notes:
1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. CASTING BY ICAST (HOE MC-420 F/C "STORM" LOU-MSD).
REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

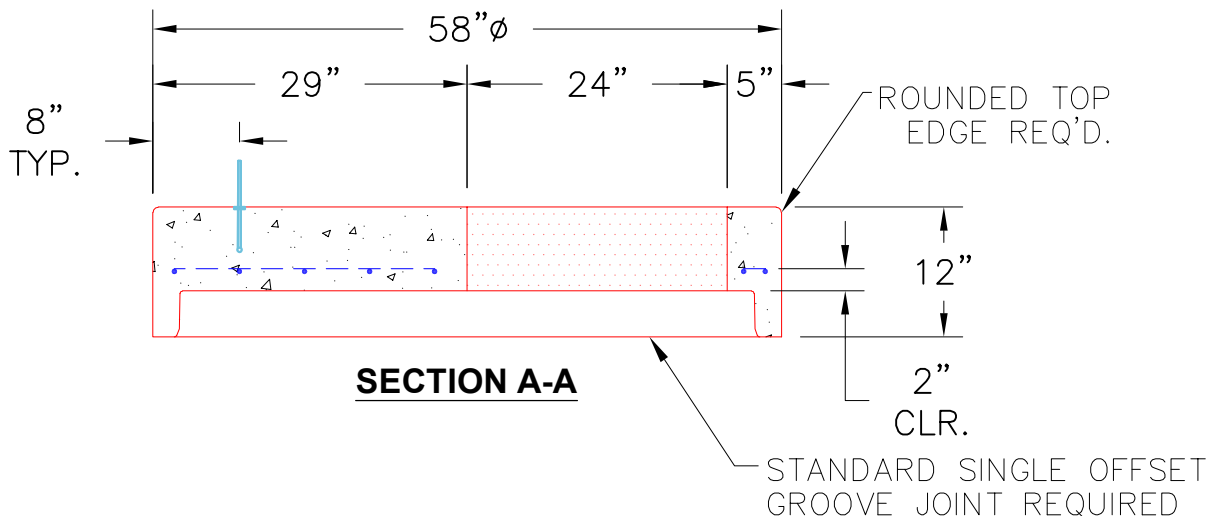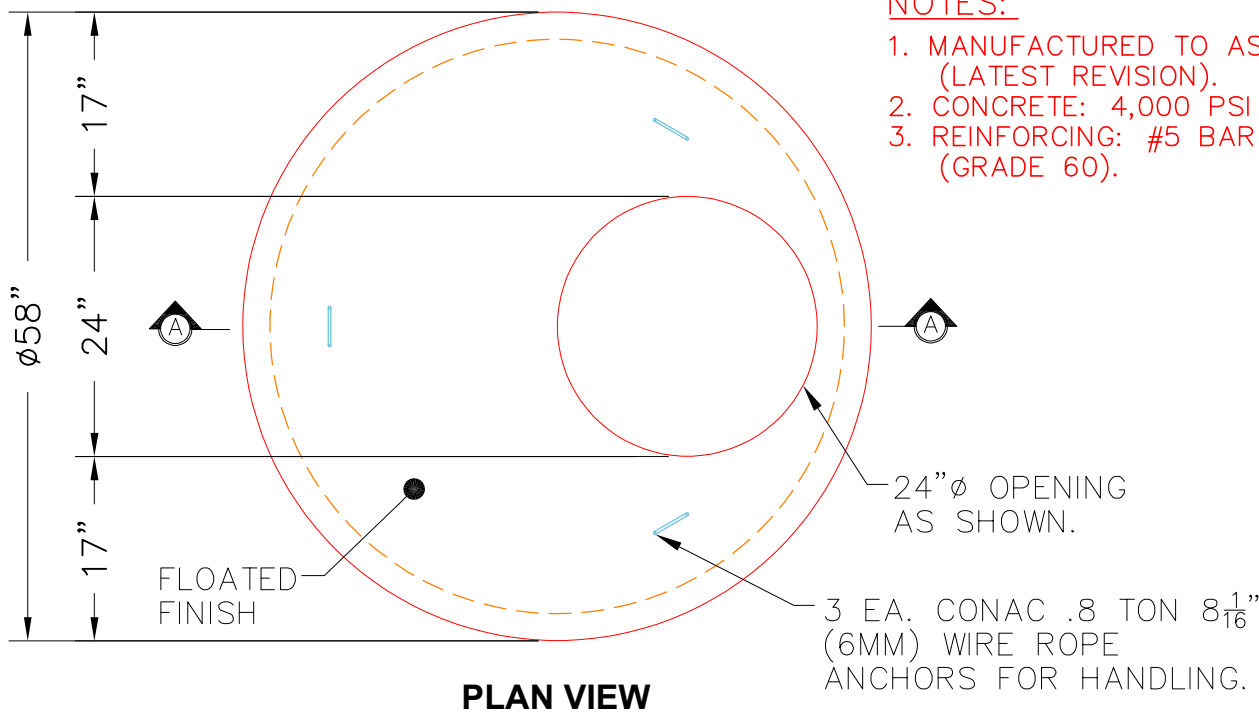

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 12"

Weight (Net): 1561 lb
Volume (Net): 0.42cu.yd