

Job Name: 26-3096 Saint Margaret Mary Parish Center  
Job Location: Louisville, KY  
Contractor: St. Margaret Mary Catholic Church c/o H&W Landwork

Plant: Beaver Dam  
7/27/2026 9:06:48 AM

Tech: S. Felletter  
PC: T. Lewis



Structure ID: PR SI 1 SCI

P2 BX2436-08LD08-SP



BX FLAT LID 8inW w/24"x30" HOLE F/F

- P3) 24" x 30" - CASTING HEIGHT - 4"  
P2) 24" x 36" - BX FLAT LID 8inW w/24"x30" HOLE F/F - 8"  
P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 23"  
1) CASTING - HOE 360 Set (F/G/H)  
1) 24" x 36" - Conseal CS-102 1.00"  
2) Hole - 16

Structure Notes:  
1. PER ASTM C913 SPECIFICATIONS.  
2. CONCRETE = 4,000 PSI AT 28 DAYS.  
3. CASTING BY ICAST (HOE 360 L VANE SET).  
REINFORCING PER ASTM A615 (GRADE 60).  
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.  
- WALLS (As .12) #5 BARS AT 12" C.C.E.W.  
- FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

NOTES:

1. MANUFACTURED TO ASTM C-931 (LATEST REVISION).  
2. CONCRETE: 4,000 PSI AT 28 DAYS.  
3. REINFORCING: #5 BAR @ 6" C.C.E.W. (GRADE 60).

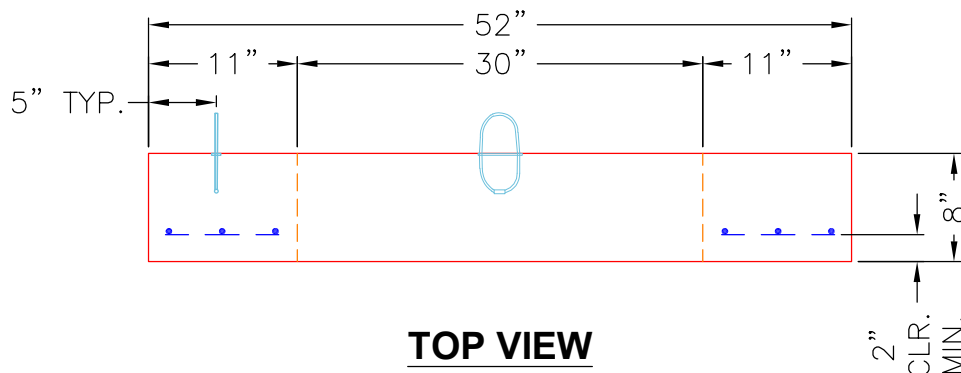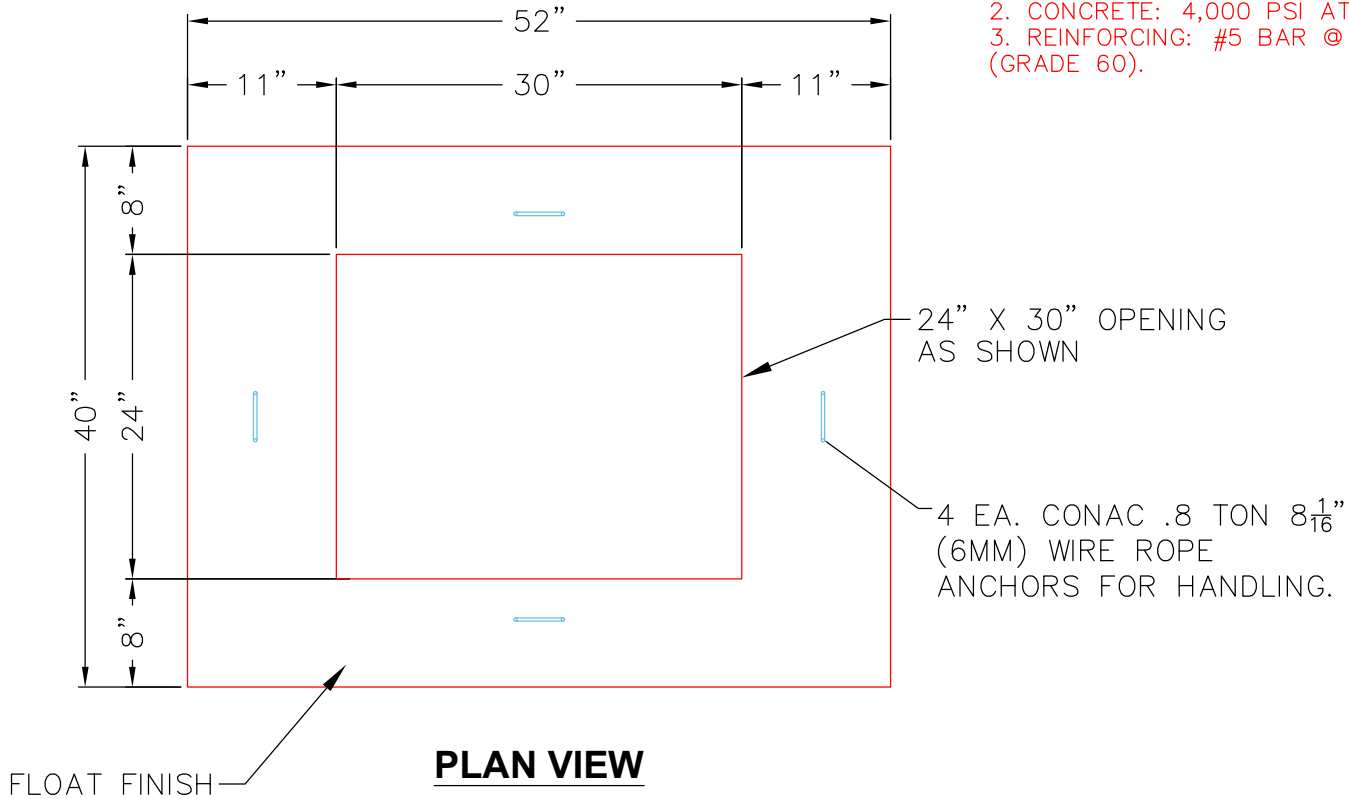

|                                  |                                |                    |                  |                                                 |
|----------------------------------|--------------------------------|--------------------|------------------|-------------------------------------------------|
| Coating (Int):<br>Coating (Ext): | Seam Up: Flat<br>Seam Dn: Flat | Wall Thickness: 8" | Height (Ext): 8" | Weight (Net): 913 lb<br>Volume (Net): 0.23cu.yd |
|----------------------------------|--------------------------------|--------------------|------------------|-------------------------------------------------|