

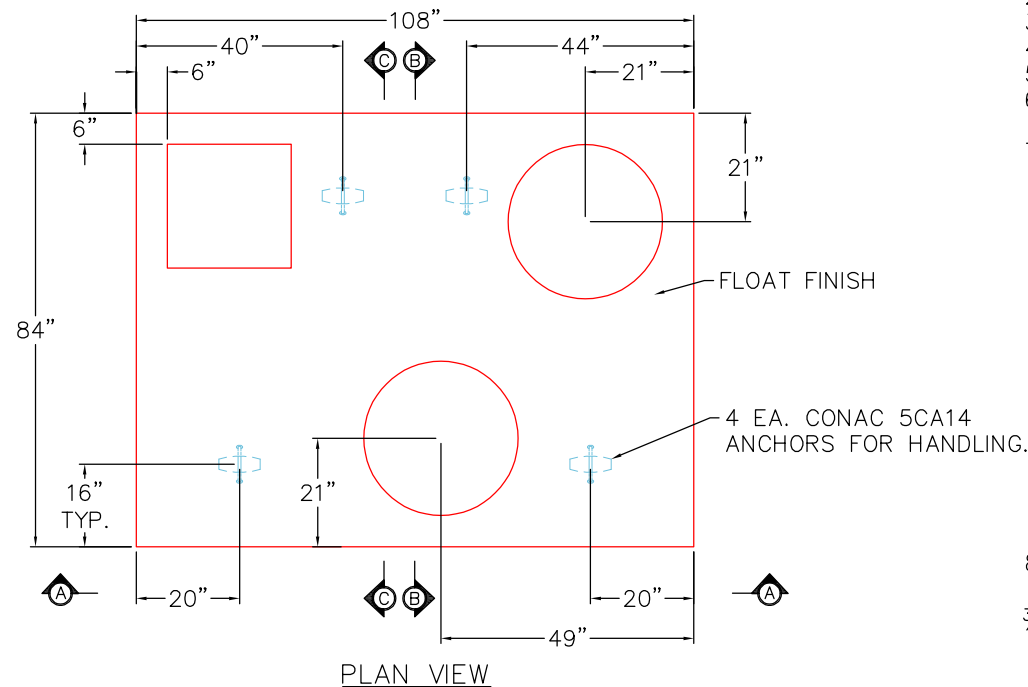
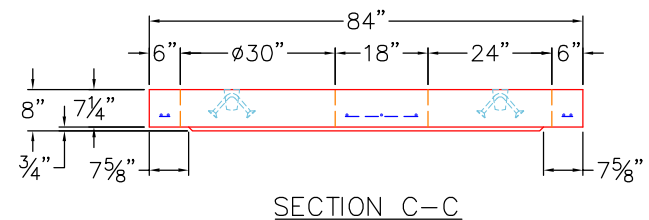


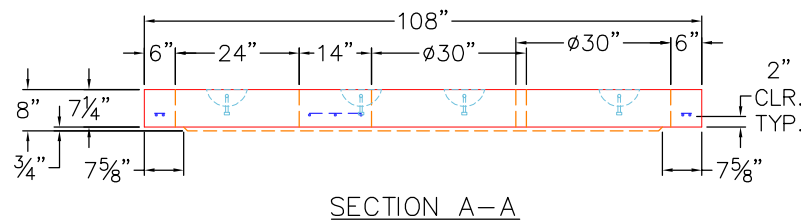

GENERAL NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 5,000 PSI AT 28 DAYS. CONCRETE.
3. REINFORCING: PER ATTACHED DESIGN BY CONTECH.
4. WEIGHT = 4,600 LBS
5. STRUCTURE TO HAVE INTERNALS INSTALLED BY ICAST.
6. INLET & OUTLET PIPE OPENINGS TO BE STENCILED ONTO THE OUTSIDE OF THE PRODUCT.
7. VAULT JOINT TO BE SEALED WITH CONCRETE SEALANTS, INC. CS-102 ROLL BUTYL MASTIC. (SUPPLIED BY ICAST).

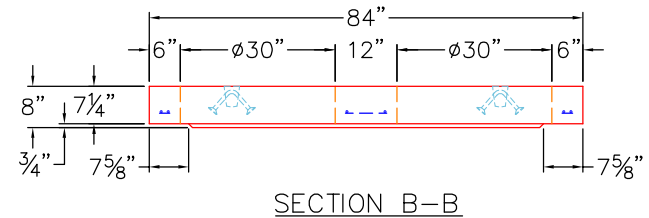

PRODUCTION WORK ORDER

PRODUCT I.D.: BX072096-06LD08S

DESCRIPTION: 72" X 96" X 7 1/4" VAULT TOP SLAB



QUALITY CONTROL CHECKLIST

- ☐ ALL DIMENSIONS CORRECT.
- ☐ LIFTERS INSTALLED.
- ☐ HATCH INSTALLED CORRECT.
- ☐ REINFORCING CORRECT.
- ☐ SURFACE QUALITY ACCEPTABLE.
- ☐ EDGES CHAMFERED.
- ☐ ALL PATCHWORK ACCEPTABLE.

PRODUCT VIEW: RIGHT SIDE UP

CUSTOMER: CONTECH ENGINEERING SOLUTIONS

PLANT: BEAVER DAM, KY.

PROJECT: 833109 WAWA NO. 7018

WEIGHT: 4,600 LBS.

STRUCTURE: 10-KFPD0608

TOP SECTION JOINT: N/A

ORDER NO: 26-3104

BASE SECTION JOINT: N/A

PC: C. GOFF

DRAWING: S. FELLETER

QC CHECK INITIALS:

DATE: 07/28/26

SCALE: NTS

PG. 1 of 1

