

Job Name: 26-3108 Proximo
Job Location: Lawrenceburg, IN
Contractor: Dave Omara Contractor, Inc.

Plant: Beaver Dam

7/23/2026 11:20:48 AM

Tech: S. Felletter

PC: M. Sullivan



Structure ID: QL1

P3 GR36x36x8x3

GRADE RING F/F

P4) 36" x 36" - CASTING HEIGHT - 3"
P3) 36" x 36" - GRADE RING F/F - 3"
P2) 36" x 36" - BOX RISER 8inW F/F - 60"
P1) 36" x 36" - KNOCKOUT BASE 8"W/F - STOCK F/n - 42"
3) 36" x 36" - Conseal CS-102 1.00"

Structure Total:



0 lb
354 lb
7089 lb
6777 lb
0 lb

14221 lb

Structure Notes: 1. PER ASTM C913 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO INVERT CHANNEL.
4. REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- WALLS (As .12) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .12) #5 BARS AT 12" C.C.E.W.


NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE = 4,000 PSI @ 28 DAYS.
3. REINFORCING: #4 BAR AS SHOWN (GRADE 60 KSI).
4. LIFTS: 2 EA. CONAC .8 TON WIRE ROPE ANCHORS REQUIRED.

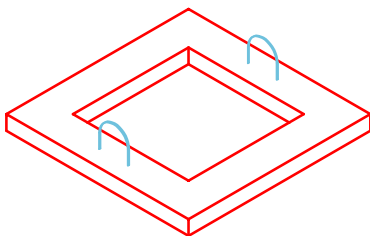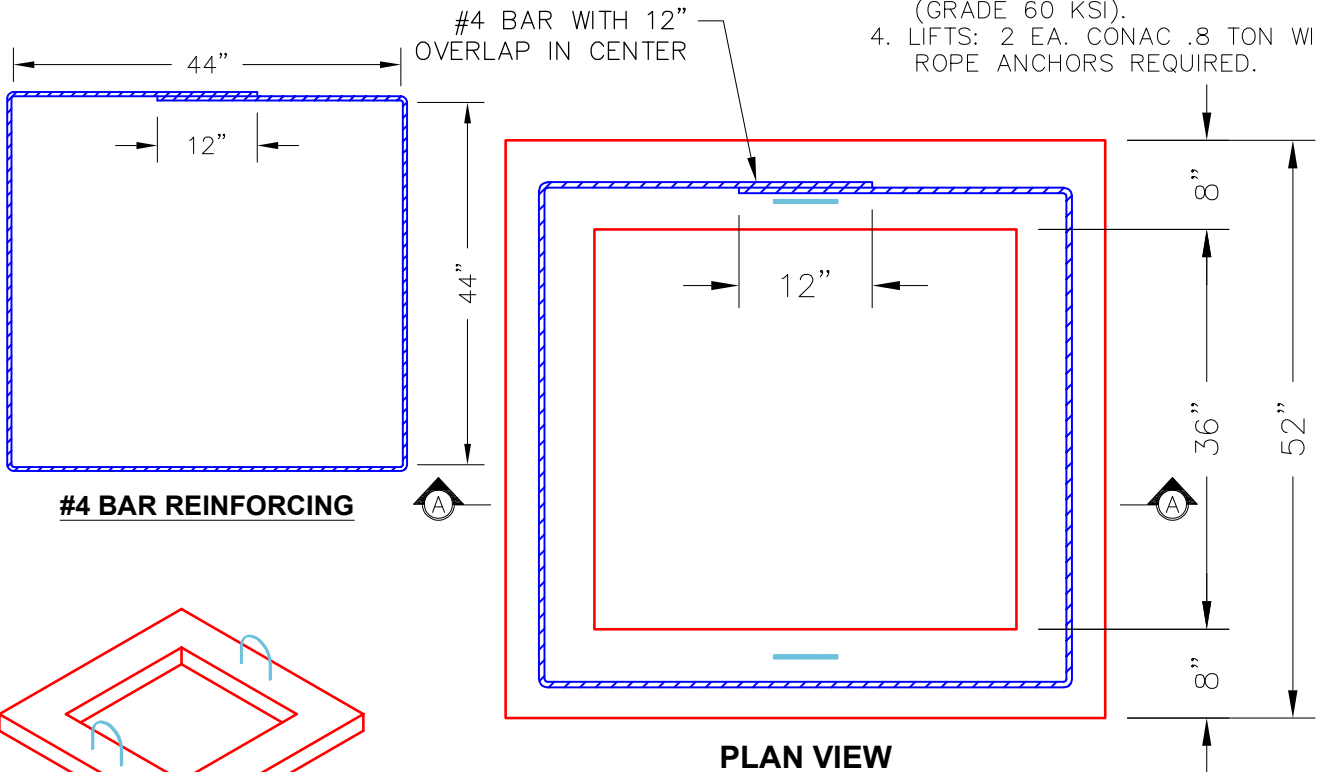

ISOMETRIC VIEW

2 EA. CONAC .8 TON 8¹/₁₆" (6MM) WIRE ROPE ANCHORS REQUIRED—MINIMUM.

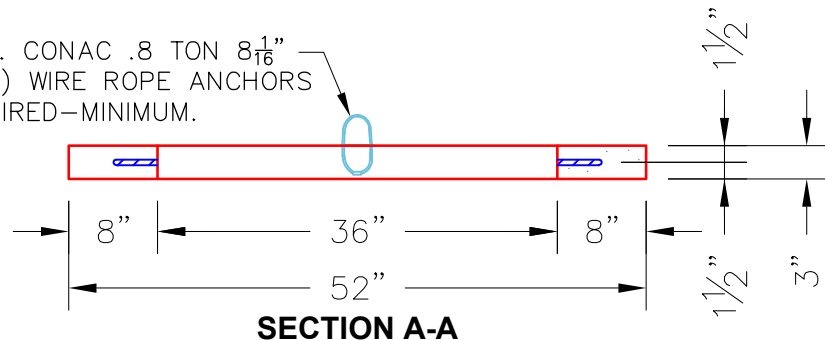

SECTION A-A

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 3"

Weight (Net): 354 lb
Volume (Net): 0.09cu.yd