


Plant: Beaver Dam

8/6/2026 3:41:06 PM

Tech:	S. Felletter
PC:	T. Ryan



Structure ID: PRECAST PIPE WEIGHT - 3000 LBS PRECAST PIPE ANCHOR		
P8	PIPEWEIGHT-03000LB	Precast Pipe Weight - HDPE - 32"

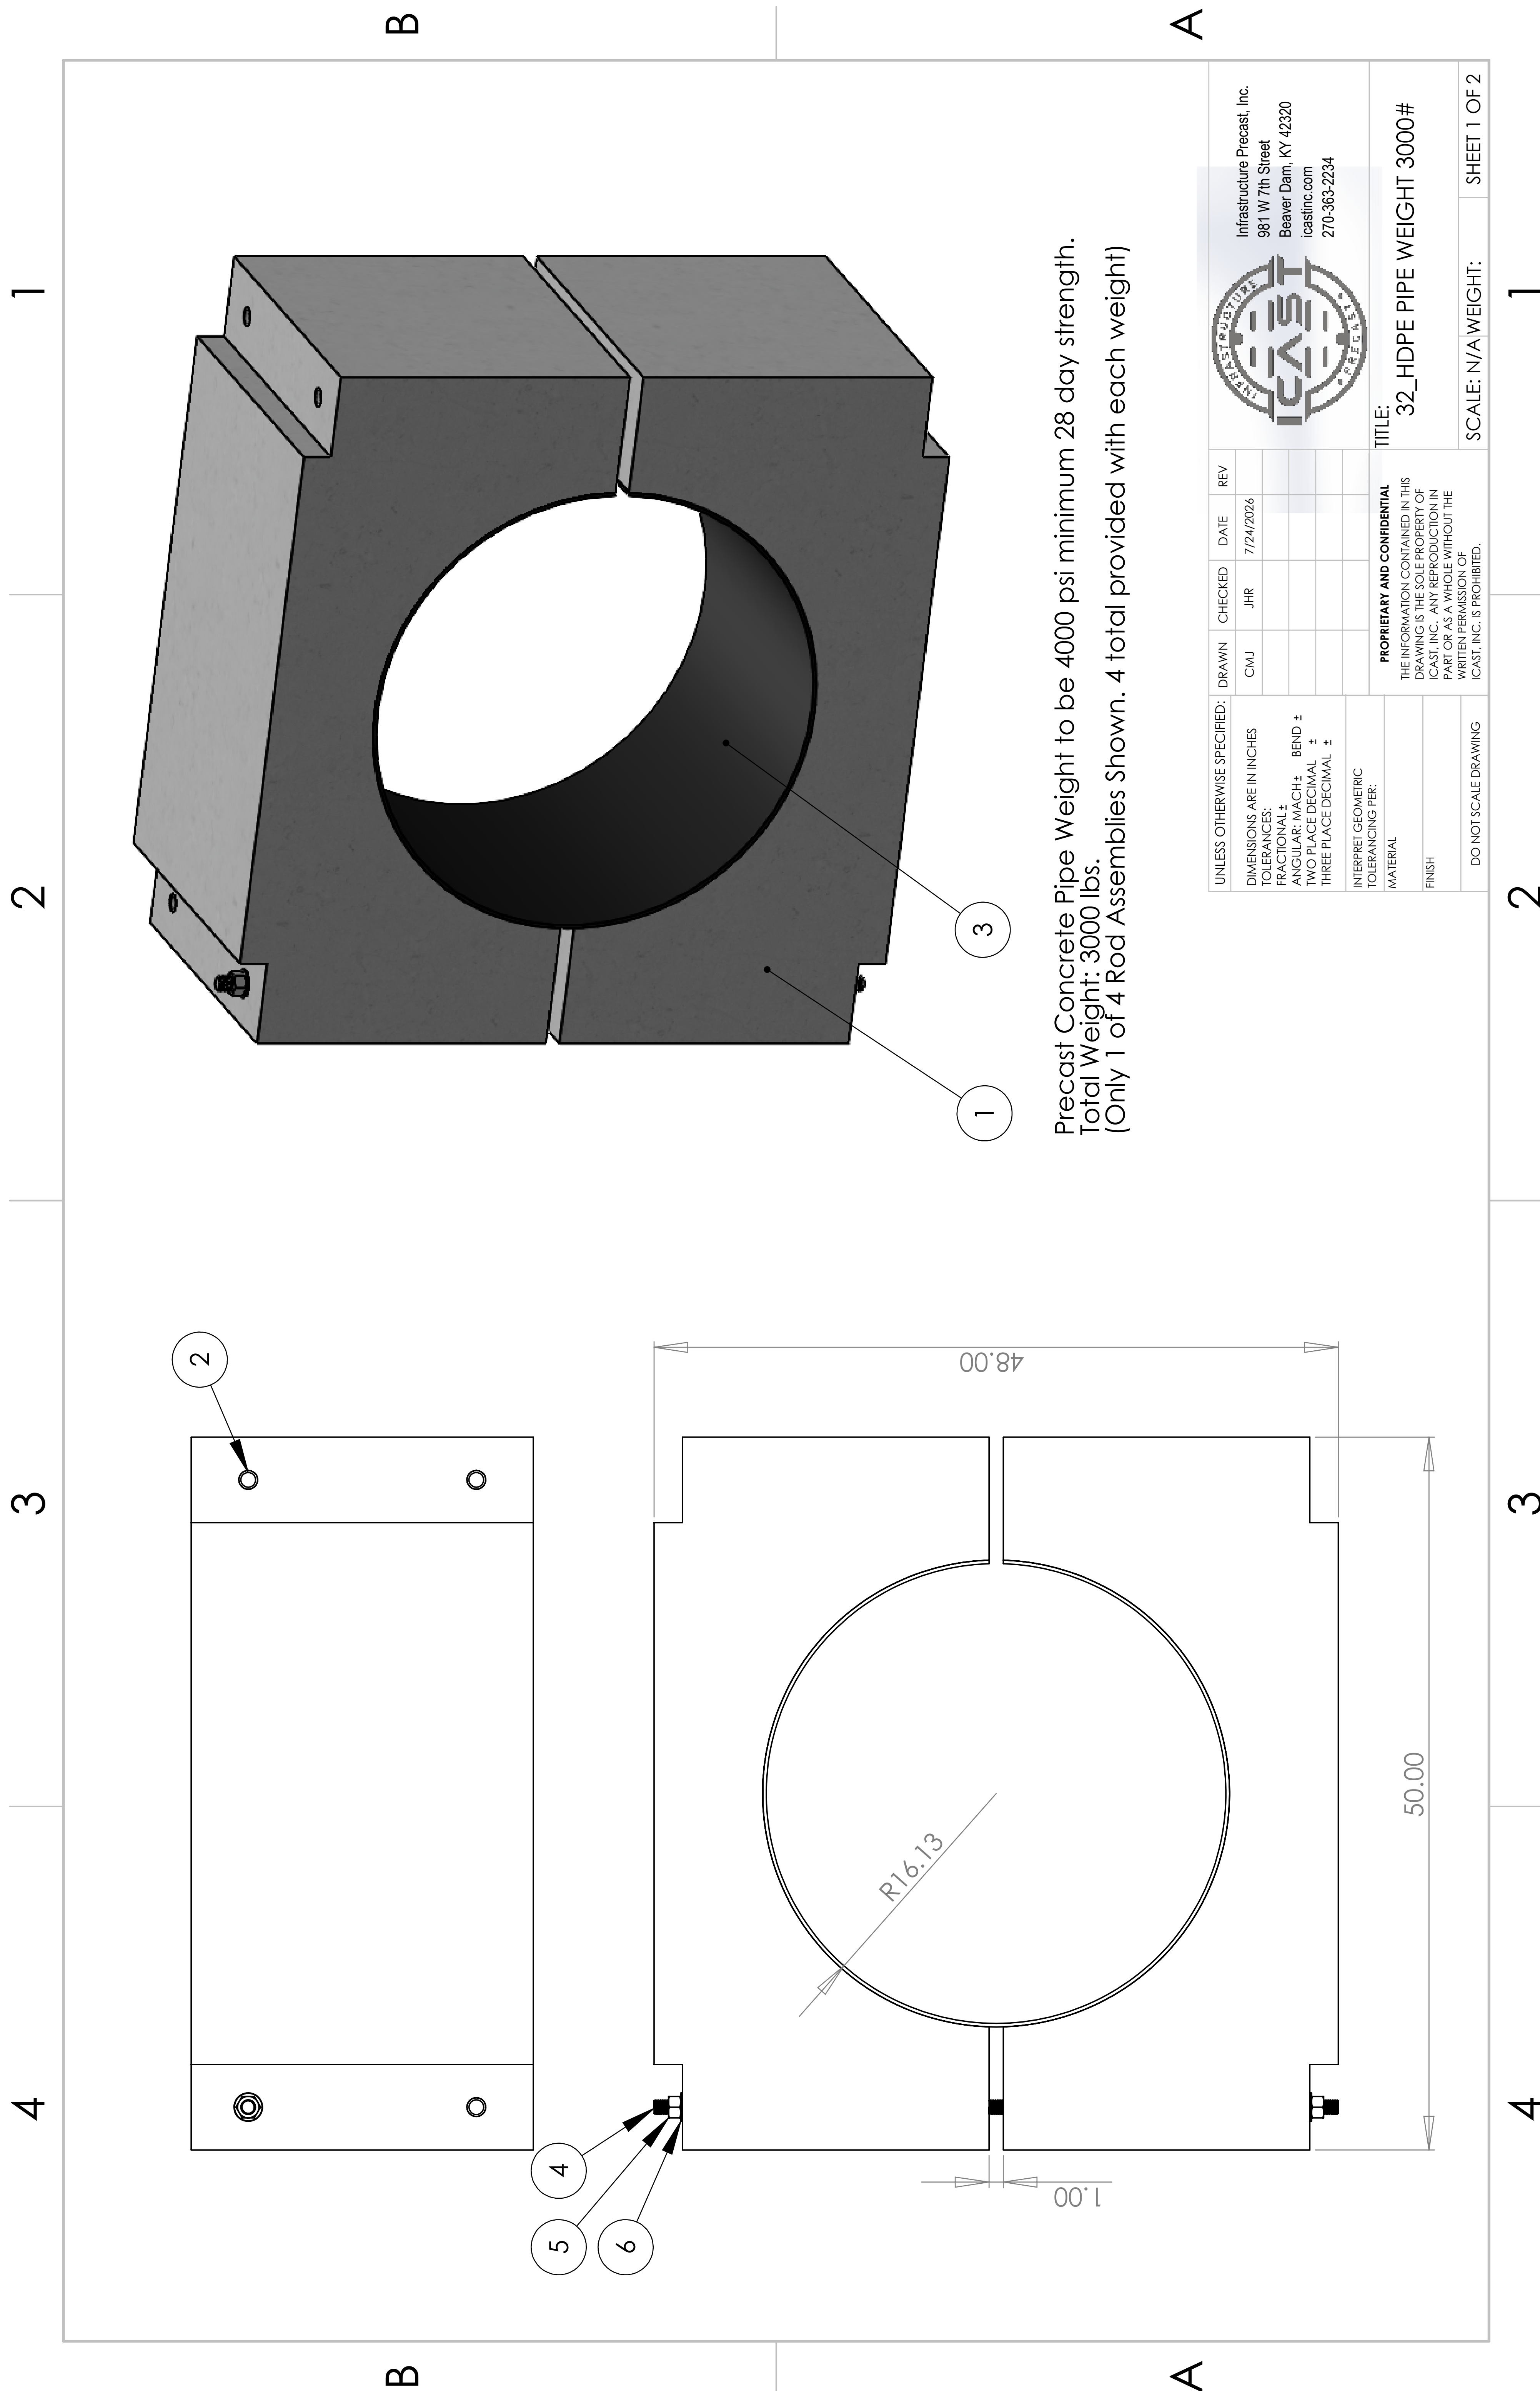

Plant: Beaver Dam

8/6/2026 3:41:06 PM

[illegible]

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	32_HDPE_HALF	1650 lbs. Half Weight for 32" HDPE Pipe	2
2	PVC ROD LINER	1" SCH 40 PVC 21-1/2" Long	8
3	32_SBR_LINER	SBR Rubber Liner for 32" HDPE Pipe Weight	1
4	91187A995	91187A995 Grade B8 18-8 Stainless Steel Threaded Rod	4
5	91845A038	91845A038 Corrosion-Resistant 18-8 Stainless Steel Hex Nut	8
6	92141A038	92141A038 18-8 Stainless Steel Washer	8

Precast Concrete Pipe Weight to be 4000 psi minimum 28 day strength.
Total Weight: 3000 lbs.
(Only 1 of 4 Rod Assemblies Shown. 4 total provided with each weight)

UNLESS OTHERWISE SPECIFIED:	DRAWN	CHECKED	DATE	REV		Infrastructure Precast, Inc. 981 W 7th Street Beaver Dam, KY 42320 icsainc.com 270-363-2234
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS: ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±	CMJ	JHR	7/24/2026			
INTERPRET GEOMETRIC TOLERANCING PER:	TITLE: 32_HDPE PIPE WEIGHT 3000#					
MATERIAL	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ICAST, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ICAST, INC. IS PROHIBITED.					
FINISH						
DO NOT SCALE DRAWING	SCALE: N/A WEIGHT:					SHEET 2 OF 2