

Structure ID: QL3 - 10'x8'x8' OD Precast Building

P4 CWV

WALL - EASI-SET BUILDING - WP-04 - 96" x 88"

BILL OF MATERIALS

MARK#	DESCRIPTION	QTY
P103G	2 TON RL-4 TECH ERECTION ANCHOR (79527SP)	2
P101L	1/2" x 1 3/4" FLARED THIN SLAB COIL INSERT	8

CONCRETE SPECIFICATIONS

CONCRETE STRIPPING @ 2,500 PSI
CONC 28 DAY STRENGTH = 5,000 PSI

CONCRETE MIX VOLUMES






CONCRETE - GRAY	0.72	CU.YD.
CONCRETE - MIX 1		CU.YD.
CONCRETE - MIX 2		CU.YD.
SOFT SOUND		CU.YD.
TOTAL		CU.YD.
WEIGHT =	2,950	LBS

FINISHING ANNOTATIONS

FF = FORM FINISH
BR = BRICK IMPRINT FINISH

PRECAST DIMENSIONS

L = 8'-0 1/2"	SQ.FT. = 58.92
W = 7'-4"	SQ.FT. =
D = 0'-4"	SQ.FT. =

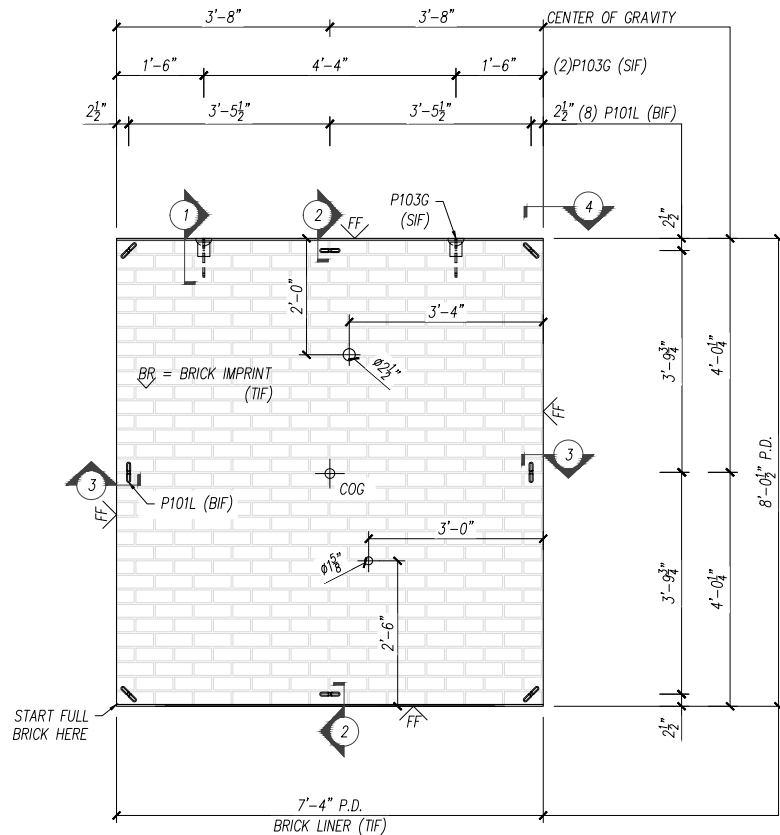

REVISIONS

REV. 0 DATE: 00/00/00 NO REVISIONS TO DATE.



SHOP DRAWING #:	FREE HILL PUMP STATION
CUSTOMER:	-
PROJECT:	-
STRUCTURE:	-
SALES ORDER NO.:	-
PC:	-
DATE:	07/23/2026
DRAWN BY:	FGT
SCALE:	NTS
PG.	WP-04 (1 OF 2)



Structure ID: QL3 - 10'x8'x8' OD Precast Building

P4 CVW



WALL - EASI-SET BUILDING - WP-04 - 96" x 88"

REINFORCING SCHEDULE

MARK#	DESCRIPTION	QTY
MK001	#3 X 3'-0" 	10
MK002	#3 X 7'-2" 	9
MK003	#3 X 7'-10 1/2" 	9

MESH SCHEDULE

MARK	DESCRIPTION	QTY

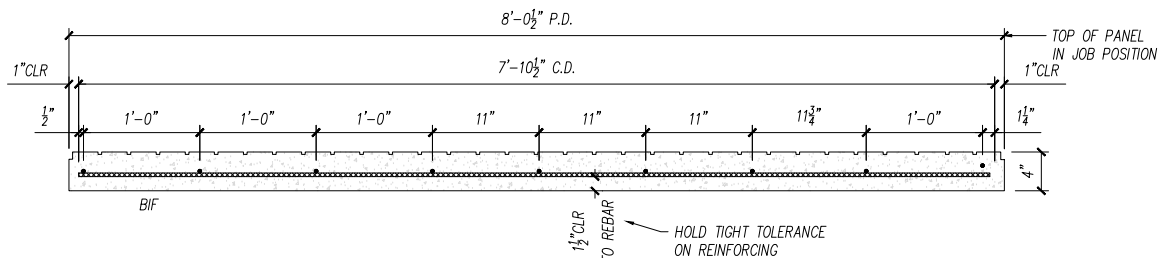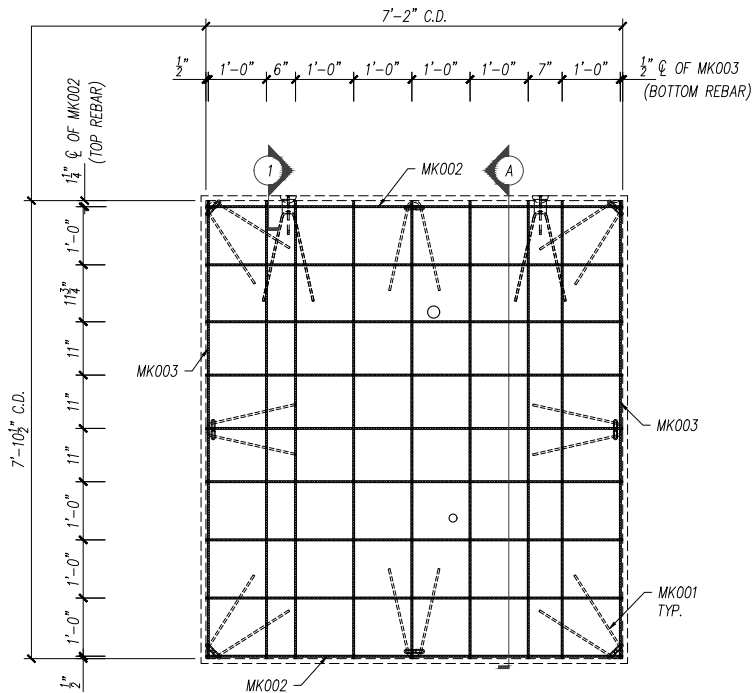

REVISIONS

REV. 0 DATE: 00/00/00

NO REVISIONS TO DATE.



SHOP DRAWING #:	FREE HILL PUMP STATION
CUSTOMER:	-
PROJECT:	-
STRUCTURE:	-
SALES ORDER NO.:	-
PC:	-
DATE:	07/23/2026
DRAWN BY:	FMT
SCALE:	NTS
PG.	WP-04 (2 OF 2)

