



Job Name: 26-3194 - Hines Center Job Location: Philpot, KY Contractor: Luttrell & Sons, LLC					Plant: Beaver Dam 8/26/2026 7:37:13 AM		Tech: J. Coppage PC: A. Chambers					
Structure ID: B2 SS-MH												
P1 MH048BA24CDARED					MH BASE w/ConBlock-CDA Red							
P4) 24" - CASTING HEIGHT - 7" P3) 48" - ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red - 30" P2) 48" - MH RISER SPECIAL w/ConBlock-CDA Red - 60" P1) 48" - MH BASE w/ConBlock-CDA Red - 24" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL w/ConBlock-CDA Red - FULL HEIGHT 1) CASTING - HOE MC-315 F/C Sanitary 2) 48" - Conseal CS-102 1.00" (Double) 1) 24" - Conseal CS-102 1.00" (Double) 1) PSX - 12-08 NYLO 3) PSX - 8QRS-S NYLO 10) MH Step ML-10-TDS-NCR - 10"					0 lb 1961 lb 4127 lb 2959 lb 0 lb 0 lb 1440 lb 258 lb 0 lb 0 lb 8 lb 20 lb 0 lb ----- 10773 lb		Structure Notes: . 1. JR HOE MC-315 SANITARY PROVIDED BY ICAST. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. ADMIXTURE = CONBLOCK CDA RED. 5. REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.					
Rim: 447.65' Rim to Invert: 10' Slack: 1" Sump: 2" Step Position: 0°												
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset		
Invert 1	437.65'	0°	0"	8" PVC SDR35	8.5"	PSX 12-08 NYLO	12"	12.129"	0"	0"		
Invert 2												
Invert 3												
Invert 4												
Invert 5												
Invert 6												
Invert 7												
Invert 8												


RIGHT-SIDE UP VIEW (int. dimensions)

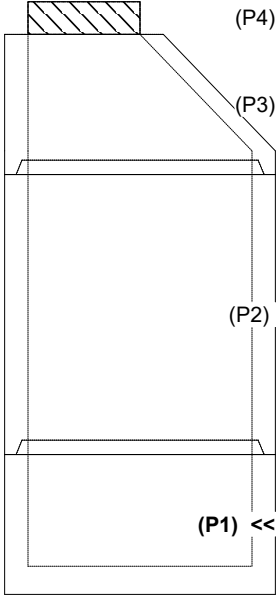

UPSIDE-DOWN VIEW (int. dimensions)

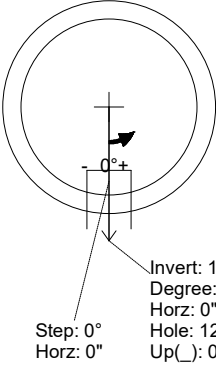

INSIDE WALL DIMENSIONS

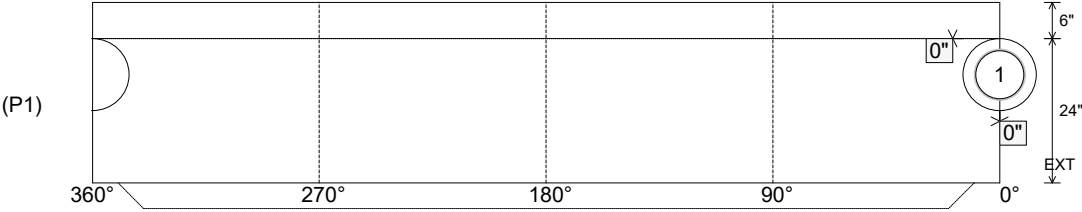

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 24" Height (Ext): 30"	Weight (Net): 2959 lb Volume (Net): 0.76cu.yd
----------------------------------	---------------------------------	--	--	--

Job Name: 26-3194 - Hines Center

Job Location: Philpot, KY

Contractor: Luttrell & Sons, LLC

Plant: Beaver Dam

8/26/2026 7:37:13 AM

Tech: J. Coppage

PC: A. Chambers



Structure ID: B2 SS-MH

P1 MH048BA24CDARED

MH BASE w/ConBlock-CDA Red

P4) 24" - CASTING HEIGHT - 7"

P3) 48" - ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red - 30"

P2) 48" - MH RISER SPECIAL w/ConBlock-CDA Red - 60"

P1) 48" - MH BASE w/ConBlock-CDA Red - 24"

1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212

1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)

1) 48" - MH INVERT CHANNEL w/ConBlock-CDA Red - FULL HEIGHT

1) CASTING - HOE MC-315 F/C Sanitary

2) 48" - Conseal CS-102 1.00" (Double)

1) 24" - Conseal CS-102 1.00" (Double)

1) PSX - 12-08 NYLO

3) PSX - 8QRS-S NYLO

10) MH Step ML-10-TDS-NCR - 10"

0 lb

1961 lb

4127 lb

2959 lb

0 lb

0 lb

1440 lb

258 lb

0 lb

0 lb

8 lb

20 lb

0 lb

10773 lb

Structure Notes:

1. JR HOE MC-315 SANITARY PROVIDED BY ICAST.

2. PER ASTM C478 SPECIFICATIONS.

3. CONCRETE = 4,000 PSI AT 28 DAYS.

4. ADMIXTURE = CONBLOCK CDA RED.

5. REINFORCING PER ASTM A615 (GRADE 60).

- CONE (As .12)

- RISER/WALLS (As .12)

- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

INVERT CHANNEL DRAWING

FULL HEIGHT INVERT

Rim: 447.65'

Rim to Invert: 10'


Slack: 1"

Sump: 2"


Step Position: 0°

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	437.65'	0°	0"	8" PVC SDR35	8.5"	PSX 12-08 NYLO	12"	12.129"	0"	0"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

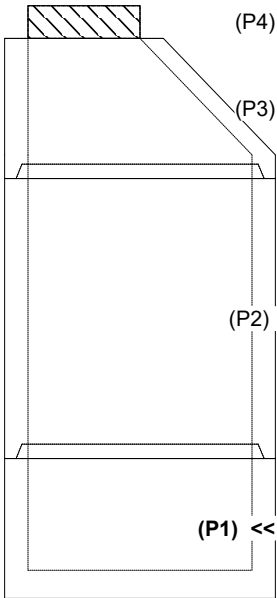

UPSIDE-DOWN VIEW (int. dimensions)

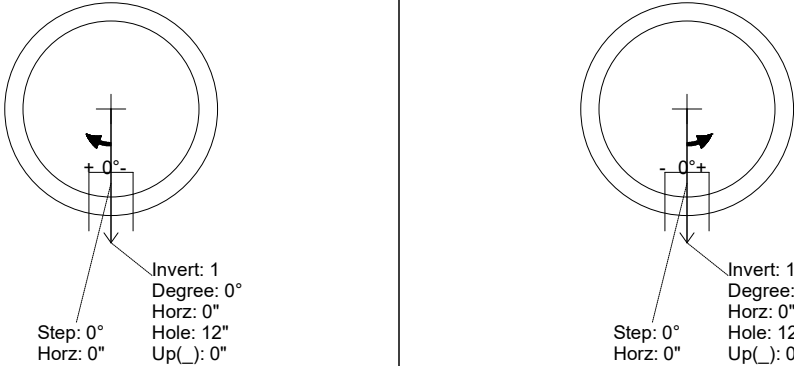

INSIDE WALL DIMENSIONS

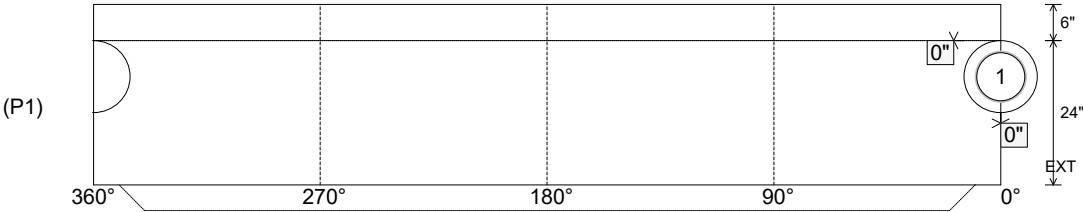

Coating (Int):

Coating (Ext):

Seam Up: Tongue

Seam Dn: n/a

Wall Thickness: 5"

Floor Height: 6"

Height (Int): 24"

Height (Ext): 30"

Weight (Net): 2959 lb

Volume (Net): 0.76cu.yd