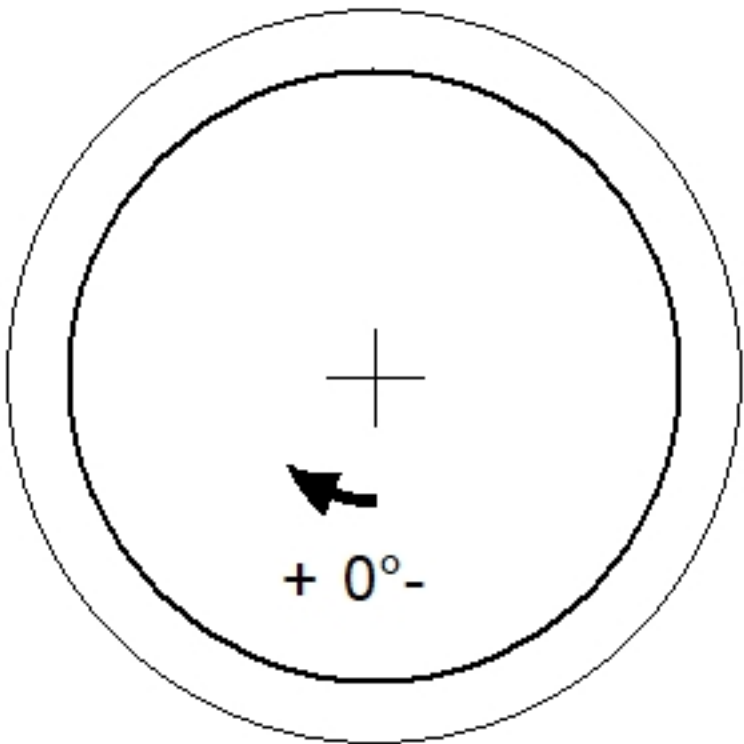
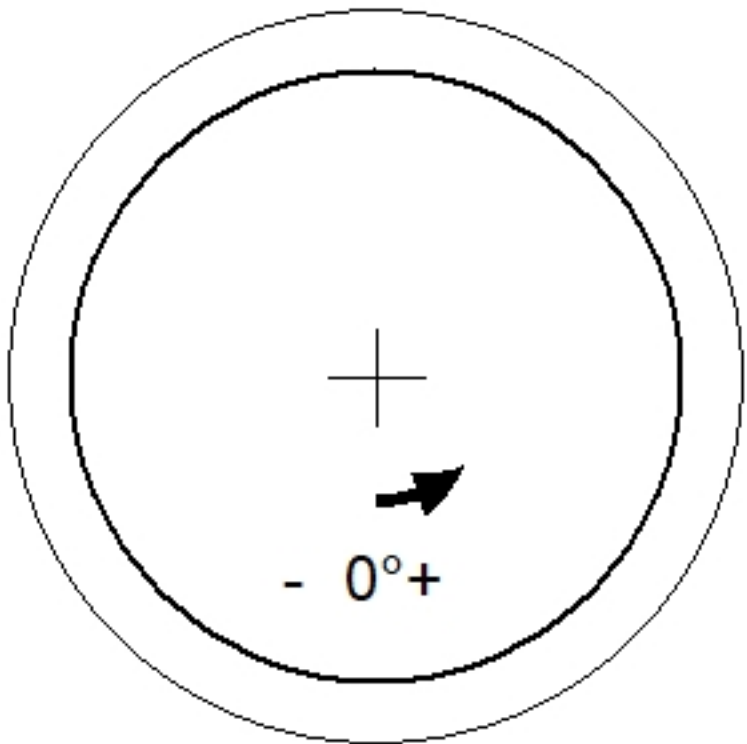
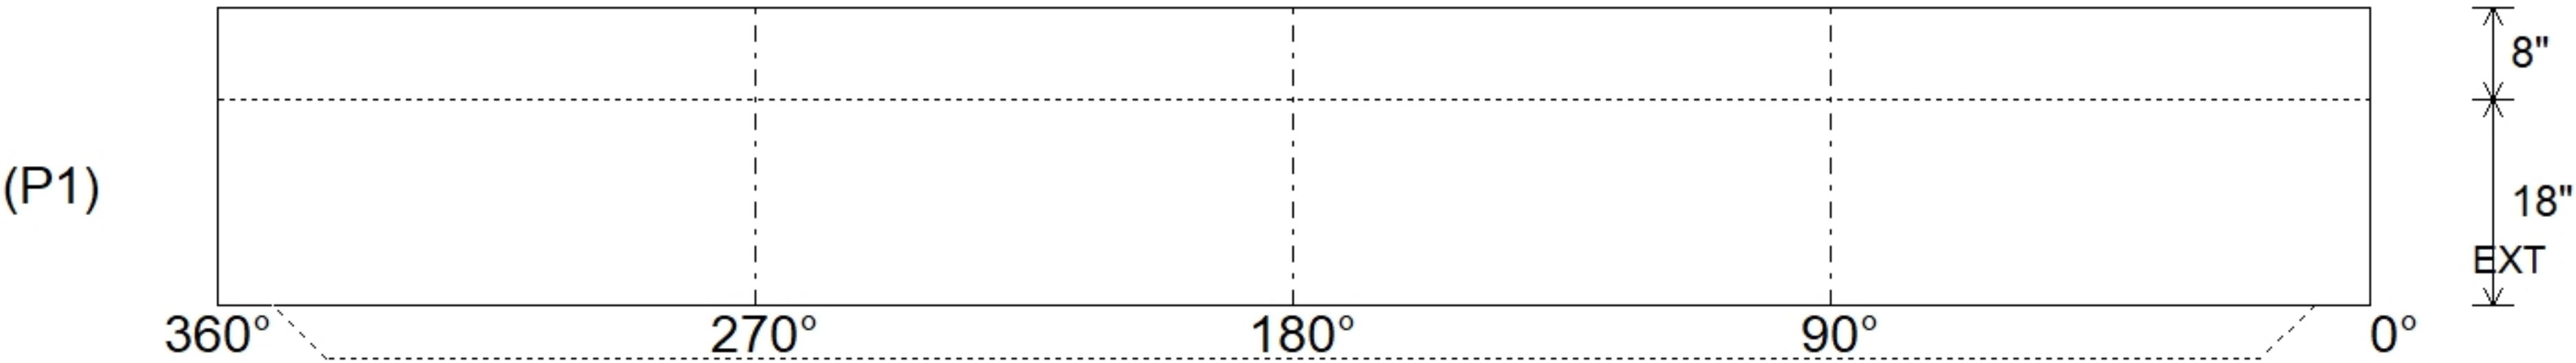


Job Name: 26-3200 906957 Austin Tri-Hawk Auto Job Location: Austin, IN Contractor: Contech Engineering Solutions					Plant: Beaver Dam 8/7/2026 1:03:07 PM		Tech: S. Felletter PC: C. Goff				
Structure ID: 10-CS-5											
P1			MH060BA18			MH BASE T/n					
P5) 30" - CASTING HEIGHT - 4" P4) 60" - MH FLAT TOP SPEC. (30" ECC HOLE) F/G - 13" P3) 60" - MH RISER Custom Ht T/G - 34" P2) 60" - MH RISER SPECIAL T/G - 72" P1) 60" - MH BASE T/n - 18" 1) ASSEMBLY REQUIRED 1) CVSTENCILING 3) 60" - Conseal CS-102 1.00" 2) Hole - 20						0 lb 2589 lb 3549 lb 7195 lb 4612 lb 0 lb 0 lb 0 lb 0 lb ----- 17945 lb		Structure Notes: . 4" CASTING BY OTHERS . LIFTING ANCHORS TO BE INSTALLED ON THE OUTSIDE OF THE STRUCTURE . ICATS TO INSTALL THE INTERNALS . CONTECH'S LOGO AS WELL AS THE INLET AND OUTLET MUST BE STENCILED ONTO THE STRUCTURE			
Rim: 560.1' Rim to Invert: 7.43' Slack: 6.276" Sump: 58.116" Step Position: 90											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimenions)   INSIDE WALL DIMENSIONS 											
Coating (Int): Coating (Ext):			Seam Up: Tongue Seam Dn: n/a		Wall Thickness: 6" Floor Height: 8"		Height (Int): 18" Height (Ext): 26"		Weight (Net): 4612 lb Volume (Net): 1.18cu.yd		