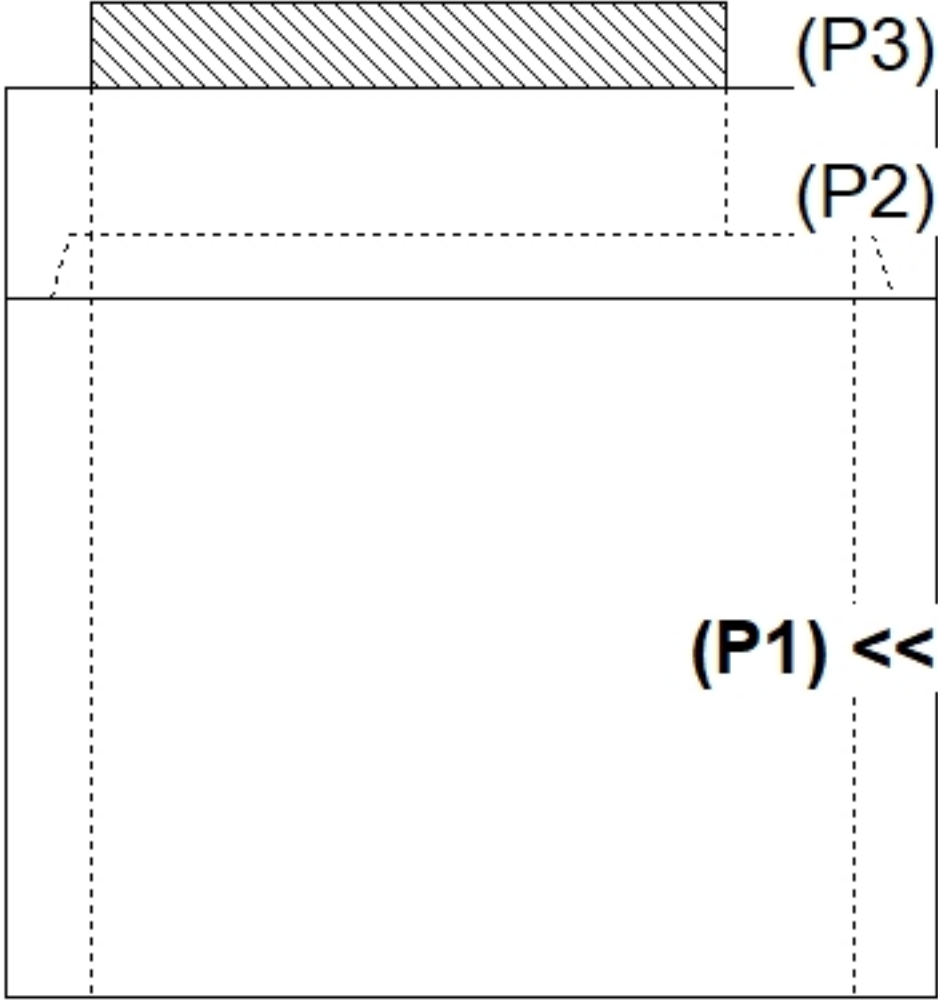
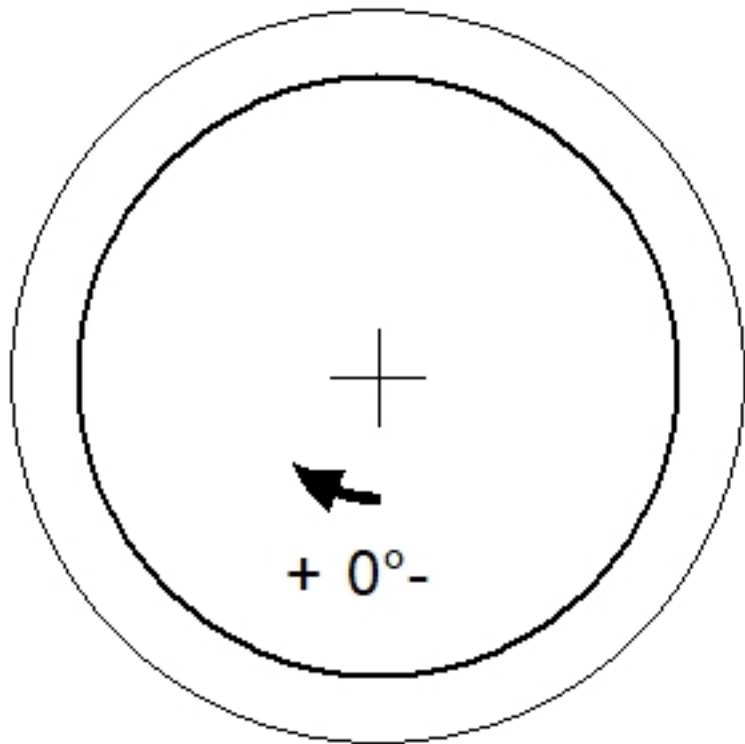
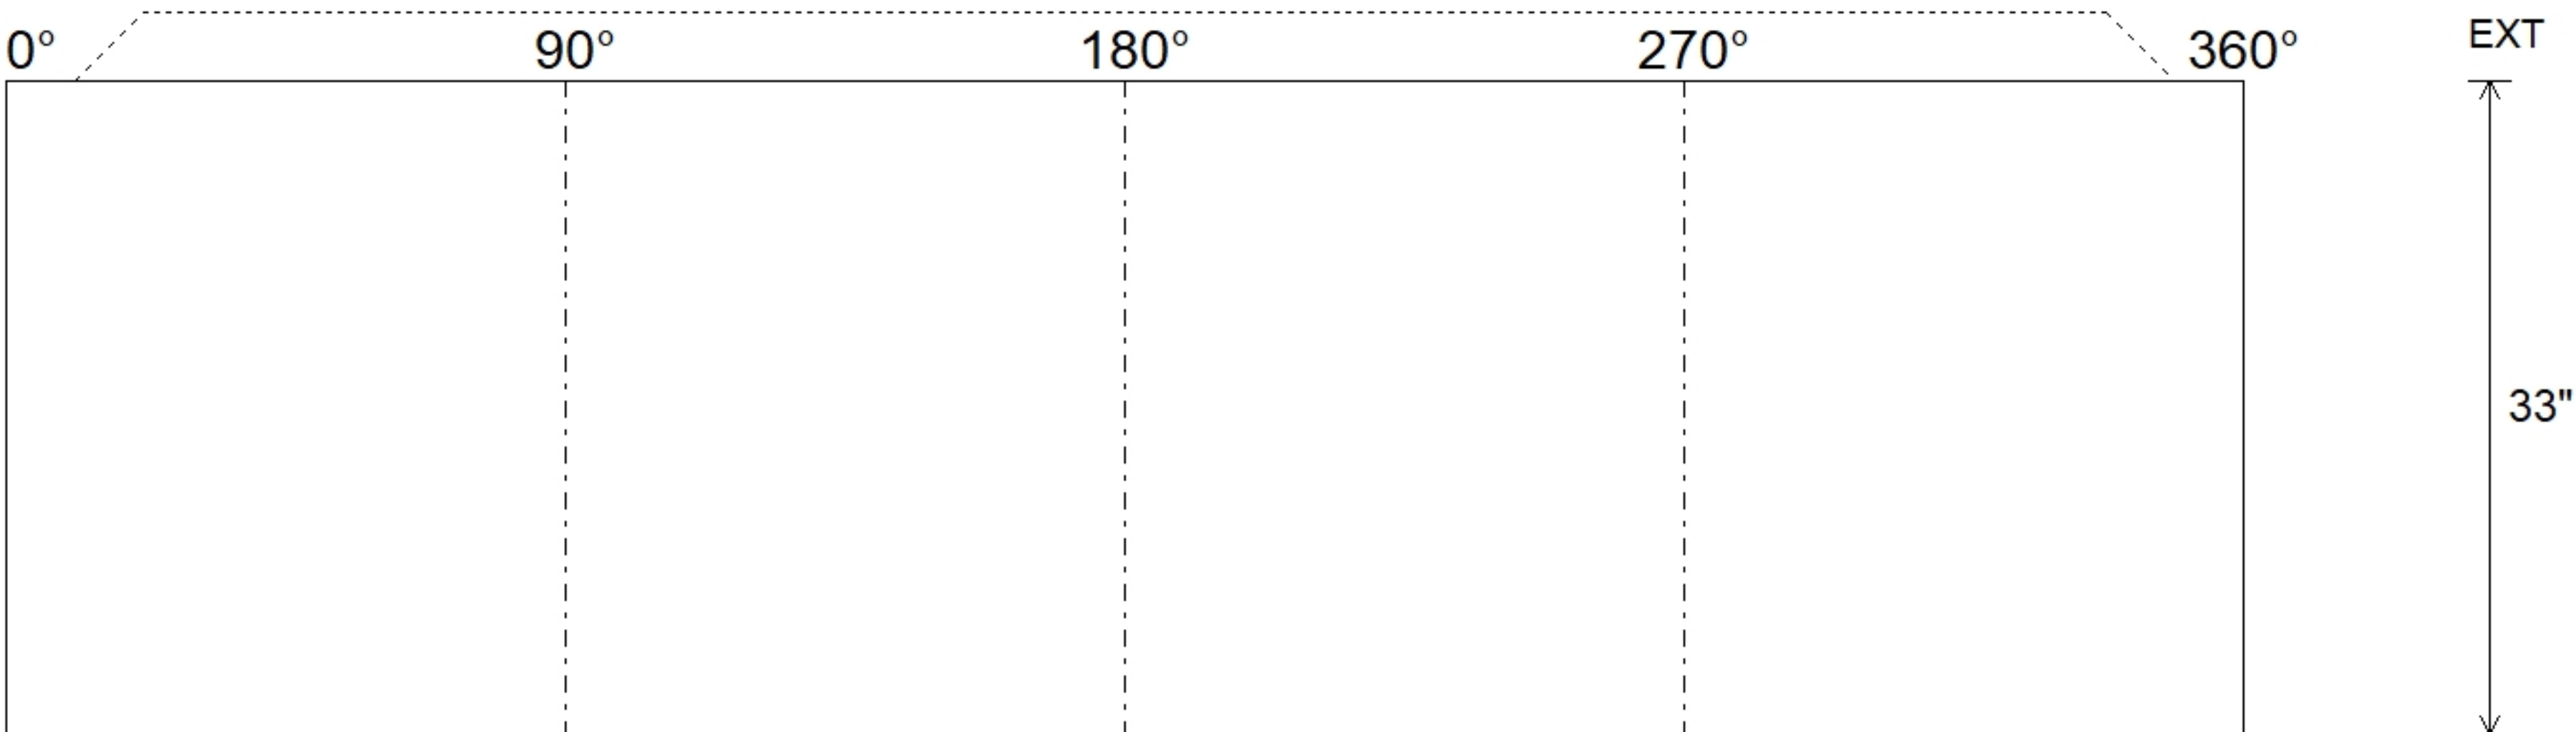


Job Name: 26-3220 844652 Montessori School of Waukesha Job Location: Waukesha, WI Contractor: Contech Engineering Solutions					Plant: Beaver Dam 8/25/2026 1:37:56 PM		Tech: S. Felletter PC: C. Goff				
Structure ID: Riser Set 1											
P1		MH036RSVF		MH RISER Custom Ht T/F							
P3) 30" - CASTING HEIGHT - 4" P2) 36" - MH FLAT LID w/30in ECC Hole F/G - 10" P1) 36" - MH RISER Custom Ht T/F - 33" 1) CVSTENCILING 1) 36" - Conseal CS-102 1.00"						0 lb 683 lb 1392 lb 0 lb 0 lb ----- Structure Total: 2075 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. 4" CASTING BY OTHERS. 4. CONTECH'S LOGO TO BE STENCILED ONTO THE OUTSIDE OF THE STRUCTURE REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .12)			
Rim: 3.917'		Rim to Invert: 0'		Slack: 0"		Sump: 0"		Step Position: 0°			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (┘)	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)											
											
INSIDE WALL DIMENSIONS											
(P1)											
Coating (Int): Coating (Ext):				Seam Up: Tongue Seam Dn: Flat		Wall Thickness: 4" Floor Height: 0"		Height (Int): 33" Height (Ext): 33"		Weight (Net): 1392 lb Volume (Net): 0.36cu.yd	