

Contractor: Contech Engineering Solutions

Plant: Beaver Dam



Size: 36"

Rim to Invert: 0'

Floor Height: 0"

Slack: 0"


Structure Notes: 1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. 4" CASTING BY OTHERS.
4. CONTECH'S LOGO TO BE STENCILED
ONTO THE OUTSIDE OF THE STRUCTURE
REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- RISER/WALLS (As .12)

STRUCTURE SUMMARY:

1) 36" - Conseal CS-102 1.00"



0 lb

Structure Total: 2075 lb

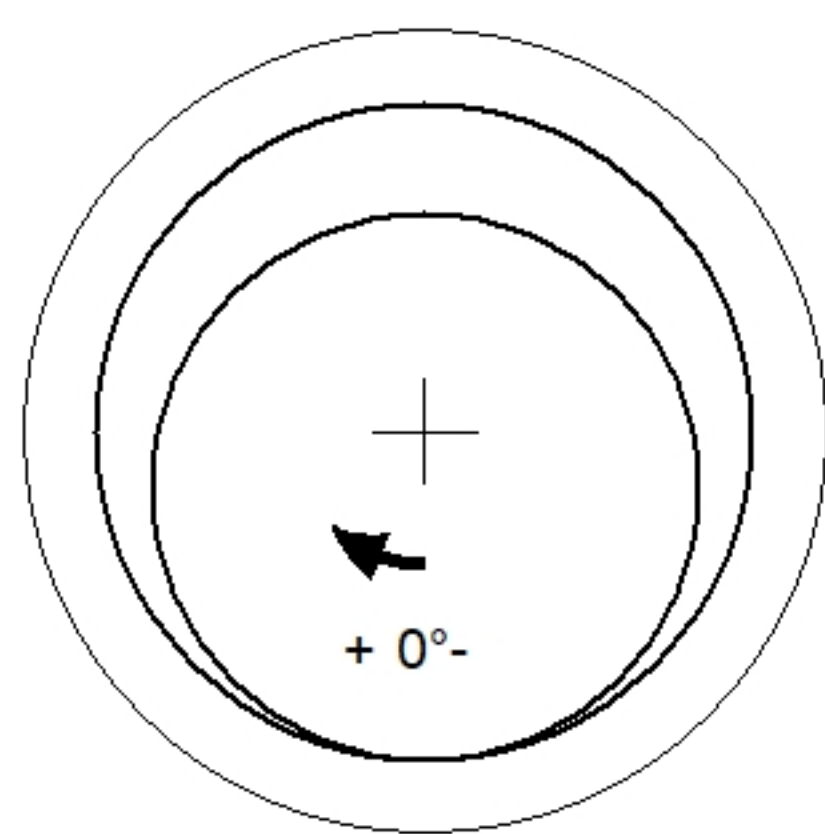

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up ()	Ref
Rim	3.917'							
Reducer								
Invert 1								
Invert 2								
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

Default - Interior Dimensions

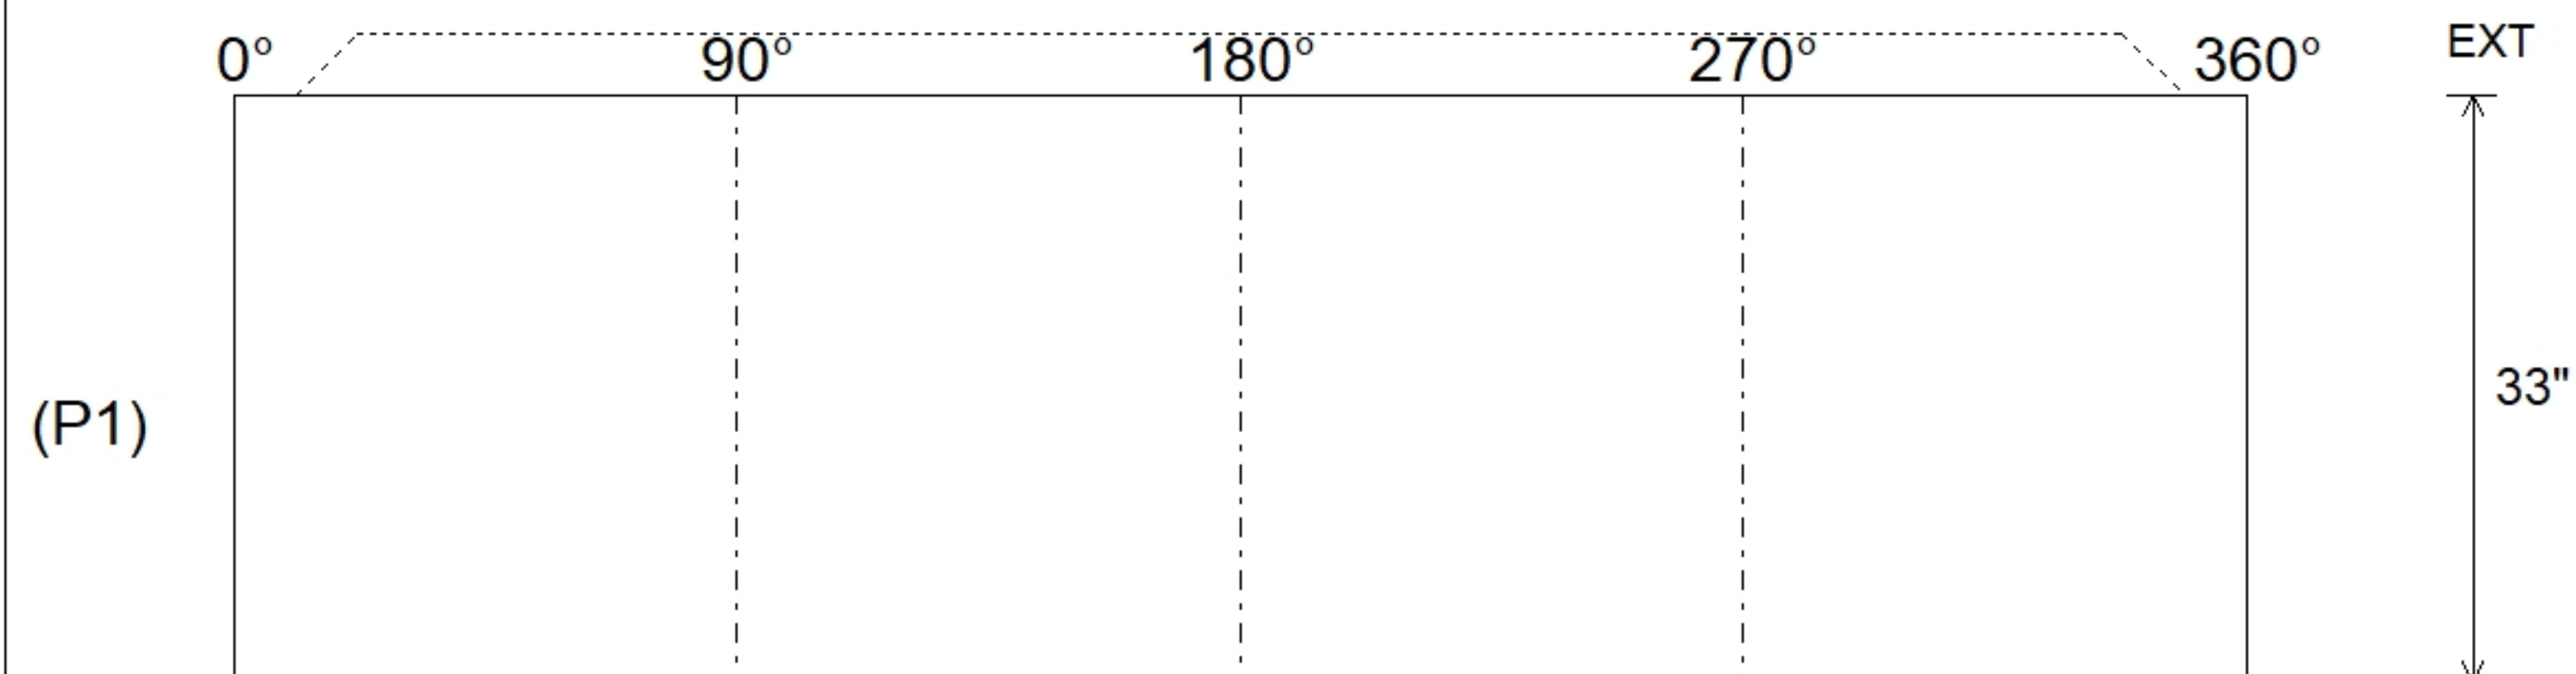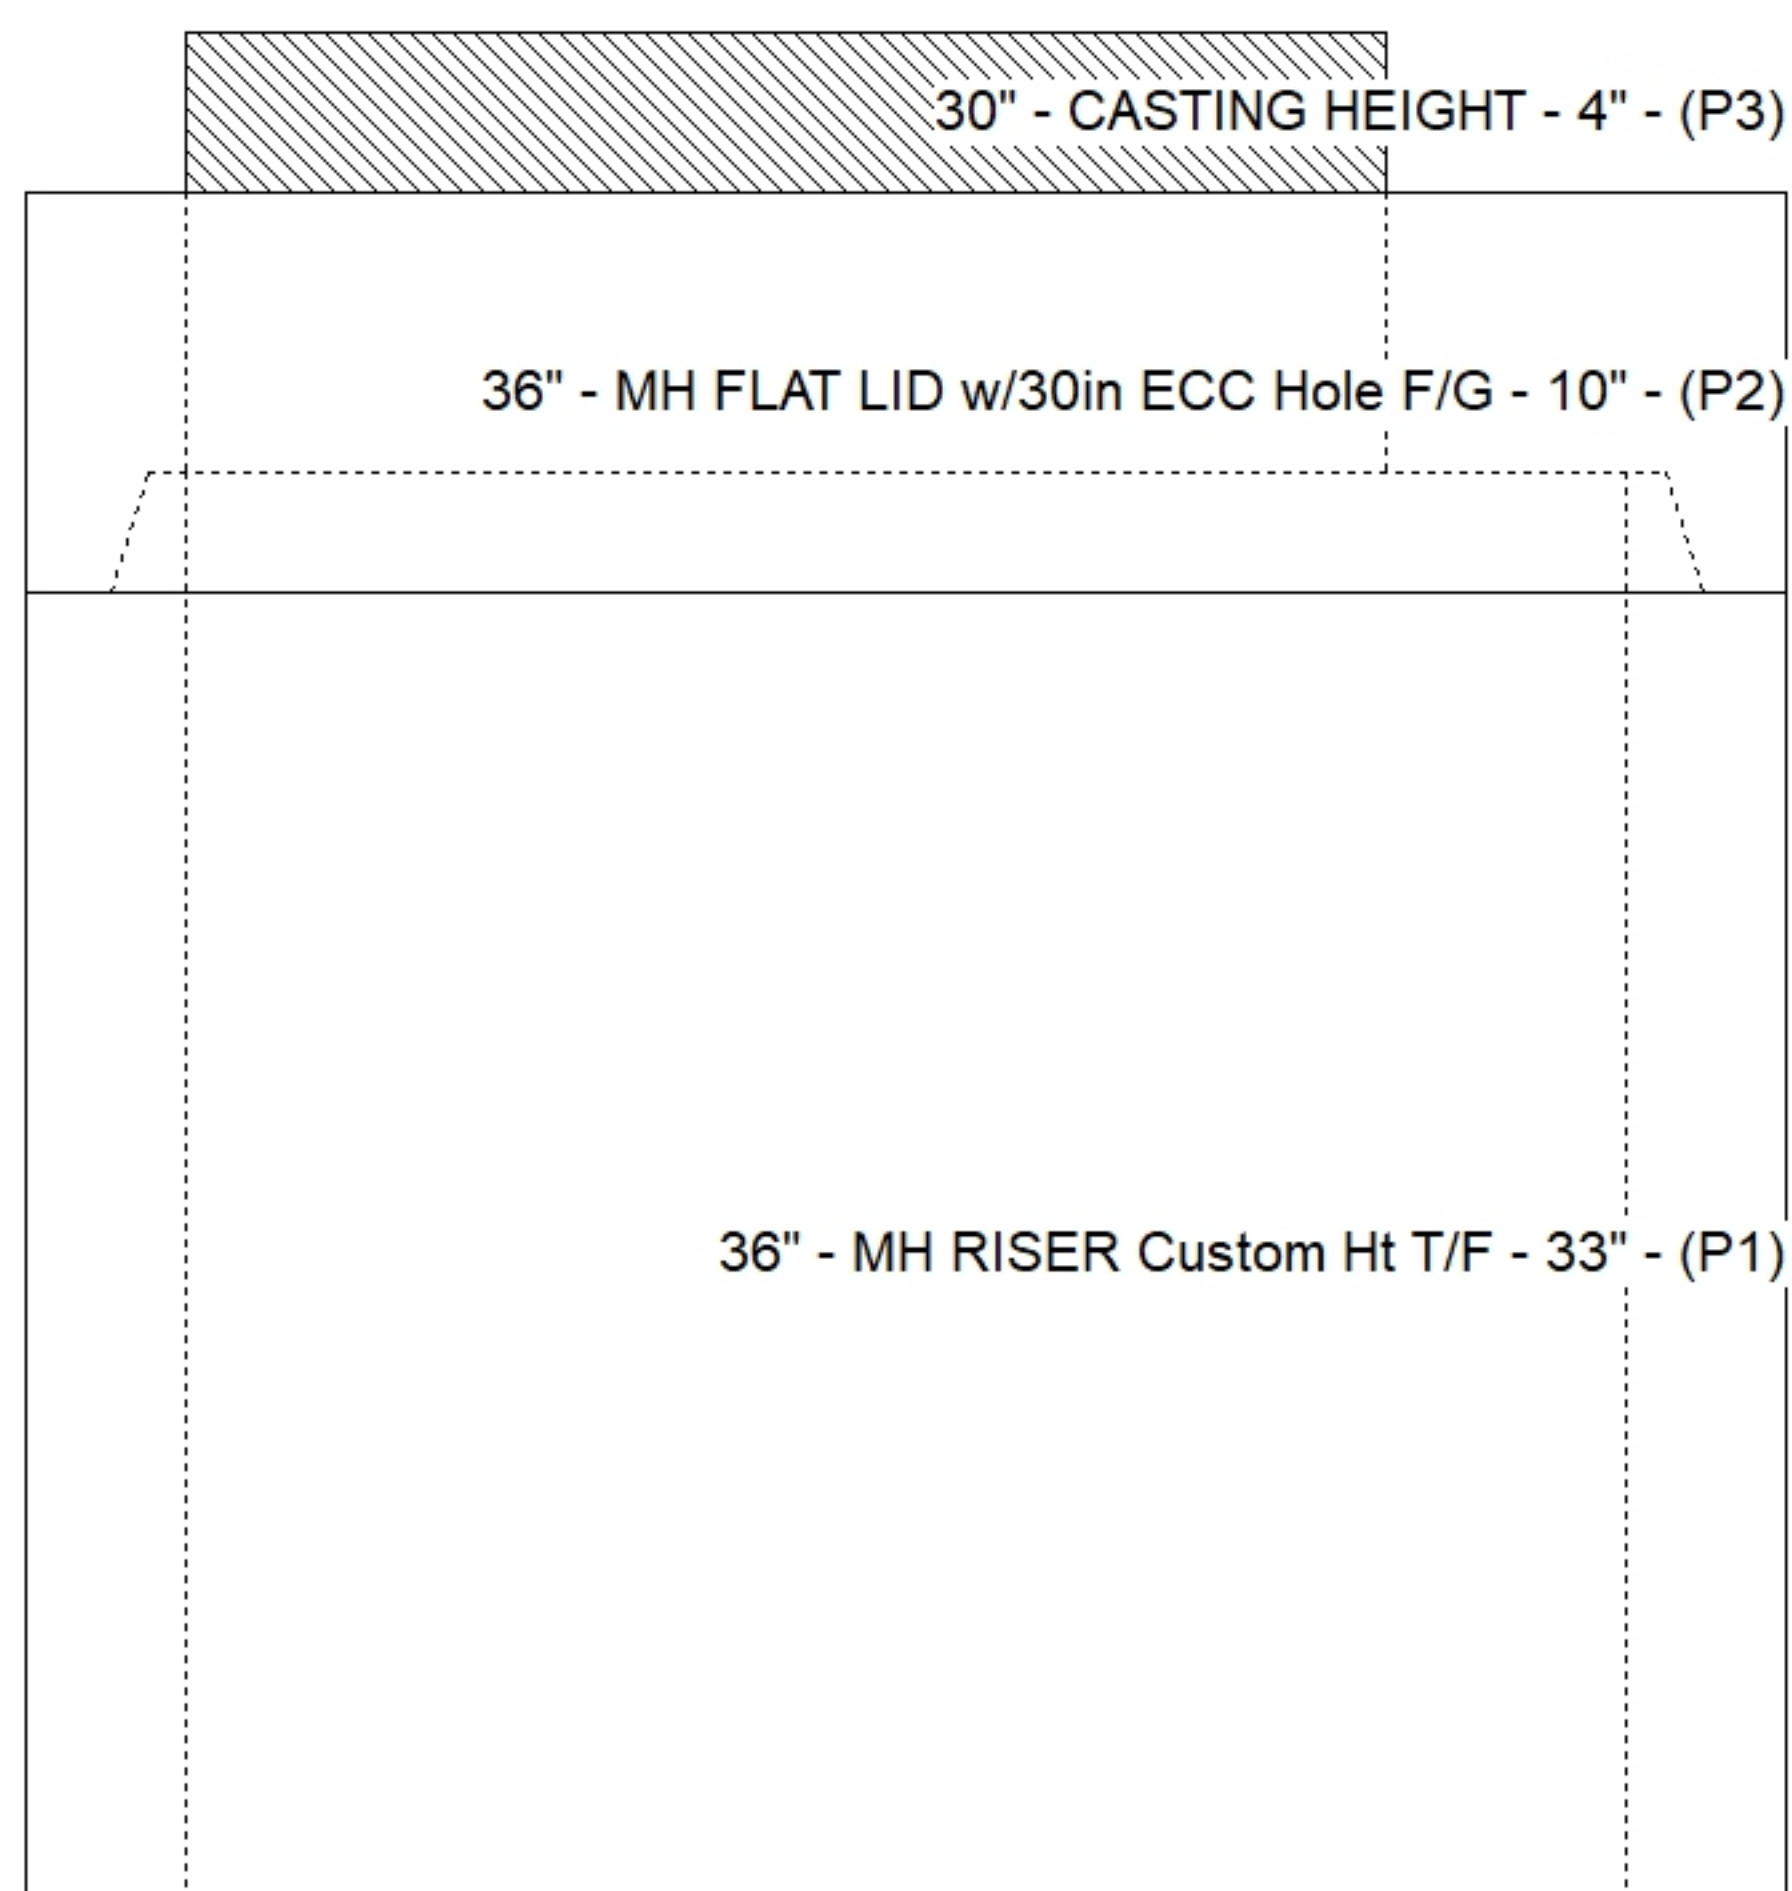

Submittal Drawing
8/25/2026 1:37:07 PM

SUBMITTAL
APPROVED BY: