

Job Name: 26-3220 844652 Montessori School of Waukesha

Job Location: Waukesha, WI

Contractor: Contech Engineering Solutions

Plant: Beaver Dam

8/25/2026 1:37:58 PM

Tech: S. Felletter

PC: C. Goff



Structure ID: Riser Set 3

P1MH036RSVF

MH RISER Custom Ht T/F

P3) 30" - CASTING HEIGHT - 4"

P2) 36" - MH FLAT LID w/30in ECC Hole F/G - 10"

P1) 36" - MH RISER Custom Ht T/F - 33"

1) CVSTENCILING

1) 36" - Conseal CS-102 1.00"

3) MH Step ML-10-TDS-NCR - 10"

0 lb

683 lb

1392 lb

0 lb

0 lb

0 lb

Structure Total: 2075 lb

Structure Notes: 1. PER ASTM C478 SPECIFICATIONS.

2. CONCRETE = 4,000 PSI AT 28 DAYS.

3. 4" CASTING BY OTHERS.

4. CONTECH'S LOGO TO BE STENCILED ONTO THE OUTSIDE OF THE STRUCTURE

REINFORCING PER ASTM A615 (GRADE 60).

- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.

- RISER/WALLS (As .12)

Rim: 3.917'

Rim to Invert: 0'

Slack: 0"

Sump: 0"

Step Position: 0°


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (┘)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

(P3)

(P2)

(P1) <<

RIGHT-SIDE UP VIEW (int. dimensions)

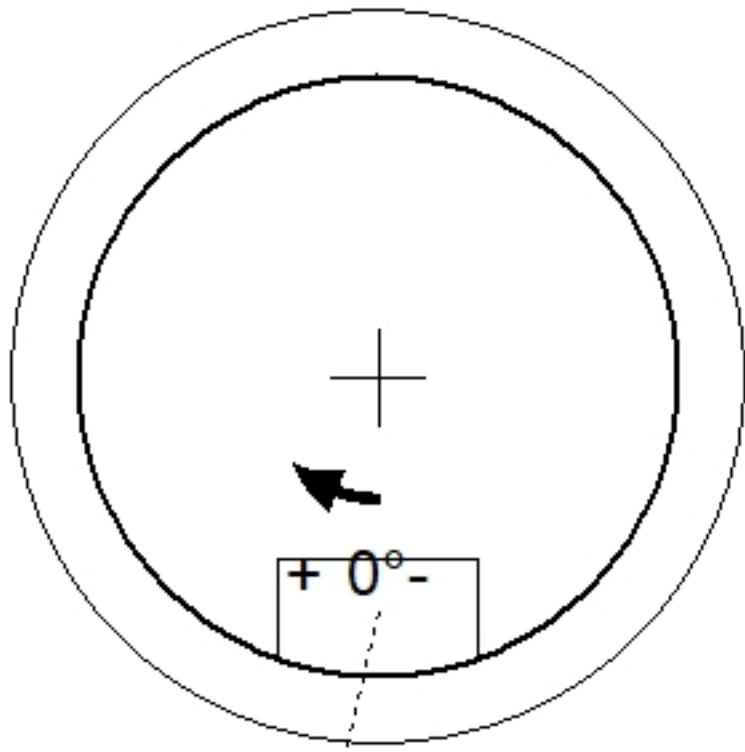

Step: 0°
Horz: 0"

INSIDE WALL DIMENSIONS

0°


90°

180°

270°

360°

(P1)

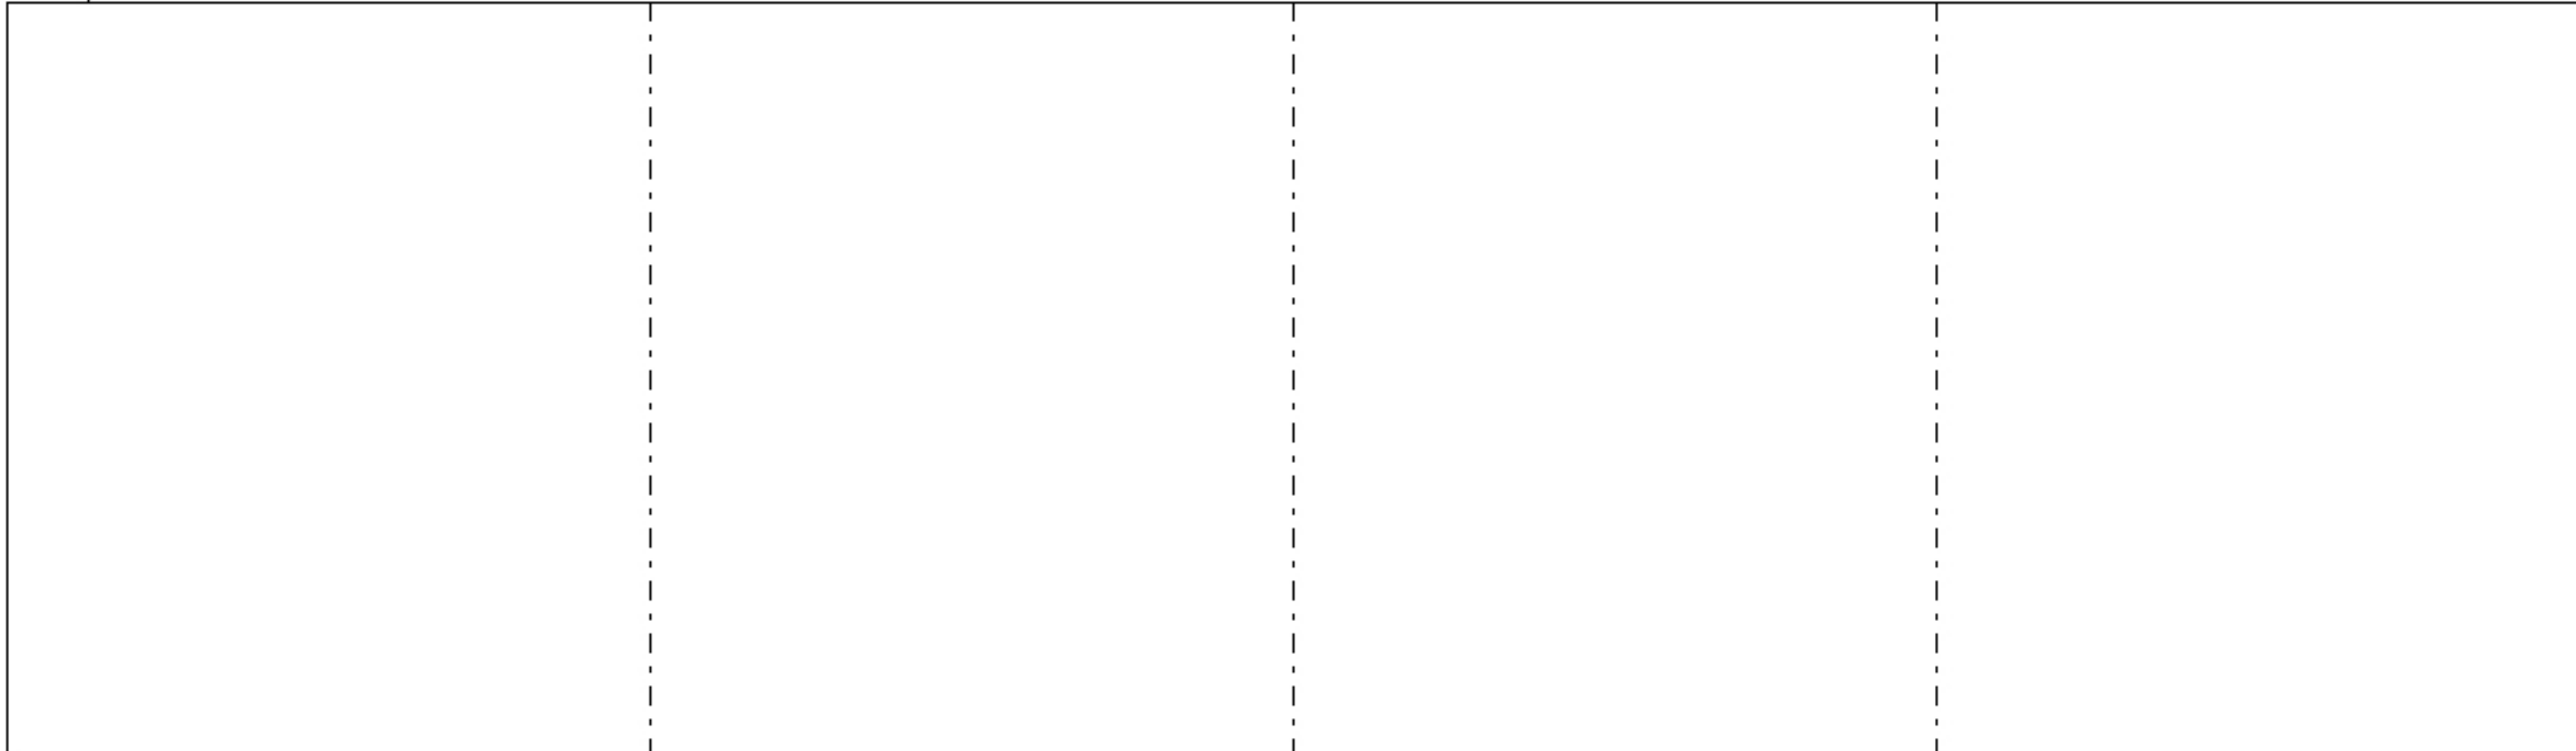

EXT
33"

Coating (Int):

Coating (Ext):

Seam Up: Tongue
Seam Dn: Flat

Wall Thickness: 4"
Floor Height: 0"

Height (Int): 33"
Height (Ext): 33"

Weight (Net): 1392 lb
Volume (Net): 0.36cu.yd