

Job Name: 26-3232 - 2-10 Hoop Drive
Job Location: Walton, KY
Contractor: Kemper Construction

Plant: 100
9/4/2026 1:16:27 PM

Tech: Jared - F
PC: E. Bradley



Structure ID: 4 CB2-2
P2 MH048RS60 MH RISER

- P4) 24" x 24" - CASTING HEIGHT - 4"
P3) 48" - MH FLAT TOP w/24"x24" Hole - 12"
P2) 48" - MH RISER - 60"
P1) 48" - MH BASE - 42"
1) CASTING - HOE 280T F/G
2) 48" - Con Seal CS-102 1.00"
1) 24" x 24" - Con Seal CS-102 1.00"
1) Hole - 18
8) MH Step ML-10-TDS-NCR - 10"



0 lb
1500 lb
4192 lb
4155 lb
182 lb
0 lb
0 lb
0 lb
Structure Notes: .
1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO INVERT CHANNEL.
4. CASTING BY ICAST (HOE 280T F/G).
REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Structure Total: 10029 lb

Rim: 953.35' Rim to Invert: 9.79' Slack: 1.48" Sump: 2" Step Position: 90

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

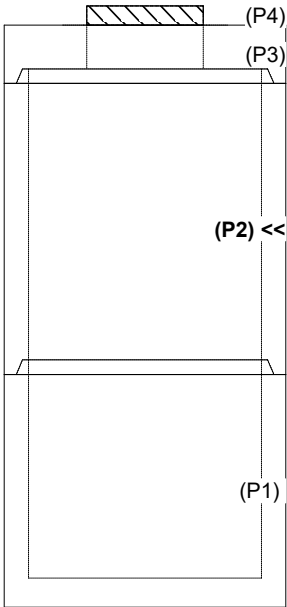

INSIDE WALL DIMENSIONS



Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 5" Floor Height: 0"	Height (Int): 60" Height (Ext): 60"	Weight (Net): 4192 lb Volume (Net): 1.07cu.yd
----------------------------------	------------------------------------	--	--	--