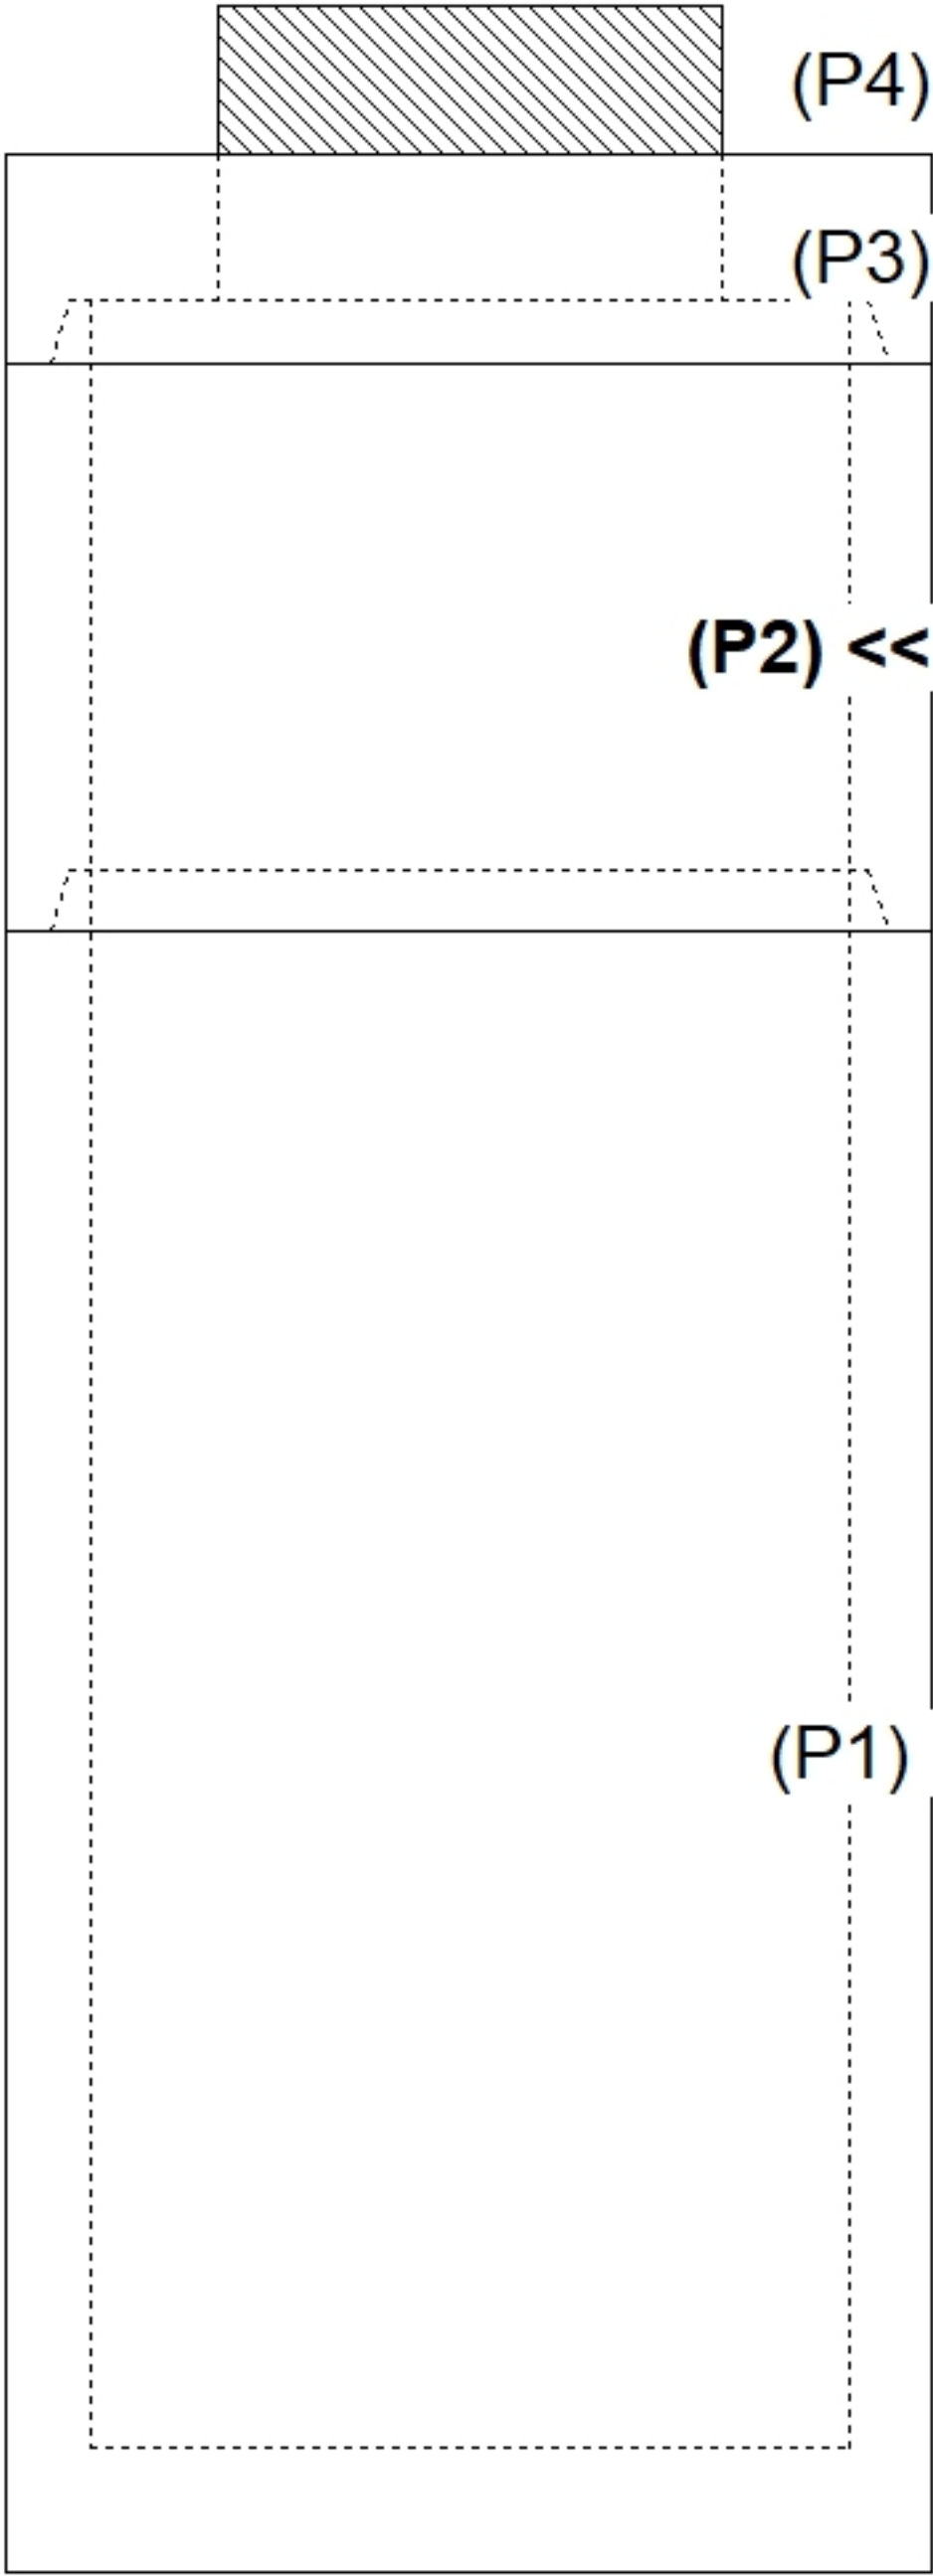
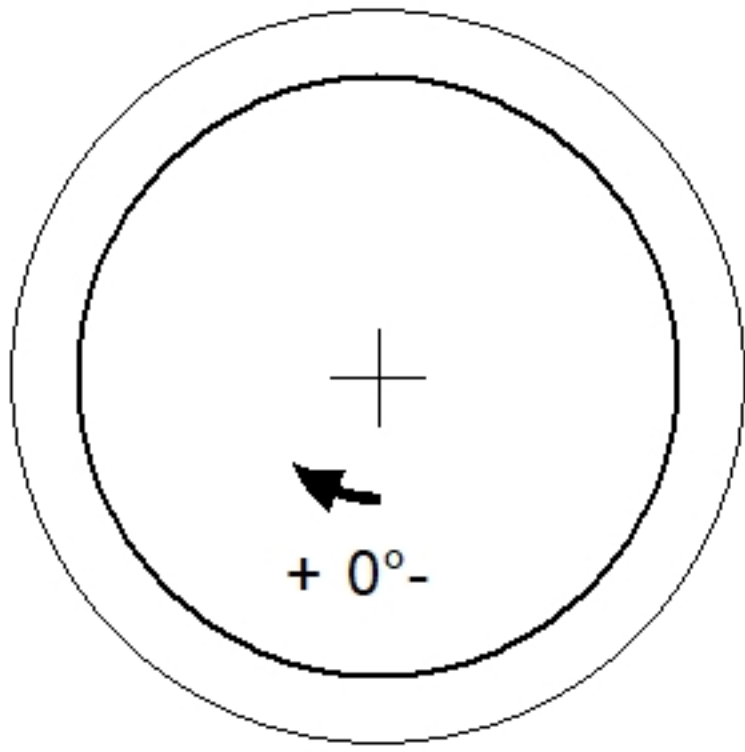
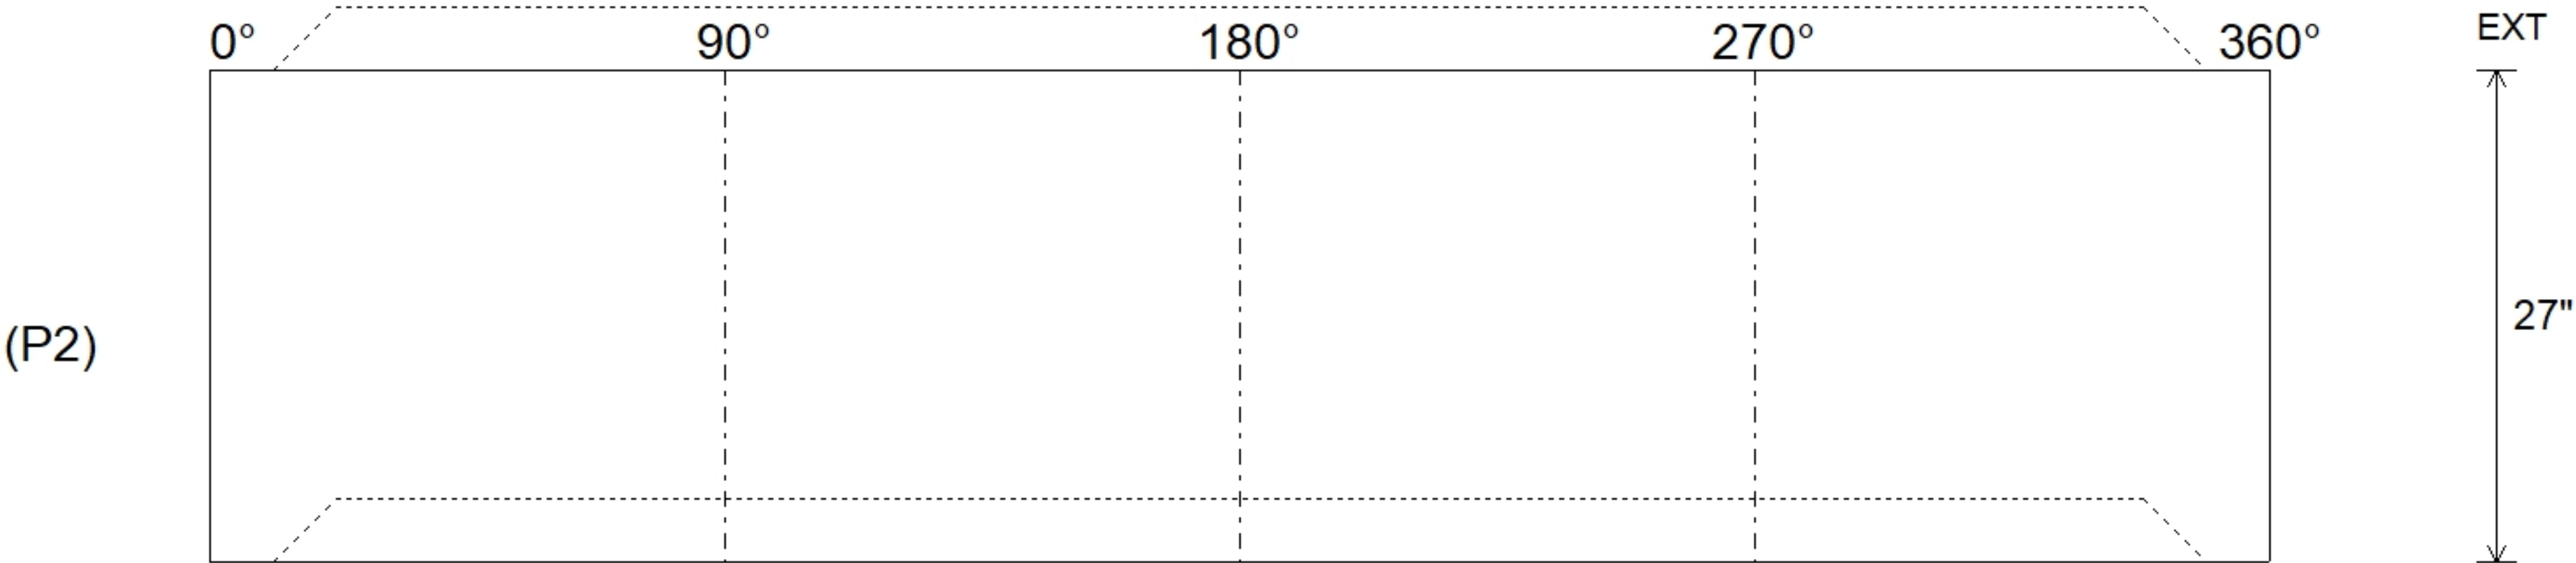


Job Name: 26-3262 ADS Anchorage Middletown Fire Station 36 Job Location: Louisville, KY Contractor: ADS Advanced Drainage Systems, Inc.					Plant: Beaver Dam 8/19/2026 4:28:10 PM		Tech: S. Felletter PC: T. Ryan				
Structure ID: WQU 1											
P2		MH036RSVF		MH RISER Custom Ht T/G							
P4) 24" - CASTING HEIGHT - 7" P3) 36" - MH FLAT TOP w/ 24" Ctr. Hole F/G - 10" P2) 36" - MH RISER Custom Ht T/G - 27" P1) 36" - MH BASE T/n - 72" 1) ASSEMBLY REQUIRED 1) CASTING - HOE MC-375 F/C Storm 2) 36" - Conseal CS-102 1.00" 1) 24" - Conseal CS-102 1.00" 2) Hole - 10						0 lb 896 lb 1139 lb 3717 lb 0 lb 271 lb 0 lb 0 lb 0 lb ----- 6023 lb Structure Total:		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE MC-375 F/C "STORM"). 4. LIFTING ANCHORS TO BE INSTALLED ON THE OUTSIDE OF THE STRUCTURE. . REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 559'		Rim to Invert: 5.1'		Slack: 0.16"		Sump: 54.96"		Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)											
											
INSIDE WALL DIMENSIONS											
											
Coating (Int): Coating (Ext):				Seam Up: Tongue Seam Dn: Groove		Wall Thickness: 4" Floor Height: 0"		Height (Int): 27" Height (Ext): 27"		Weight (Net): 1139 lb Volume (Net): 0.29cu.yd	