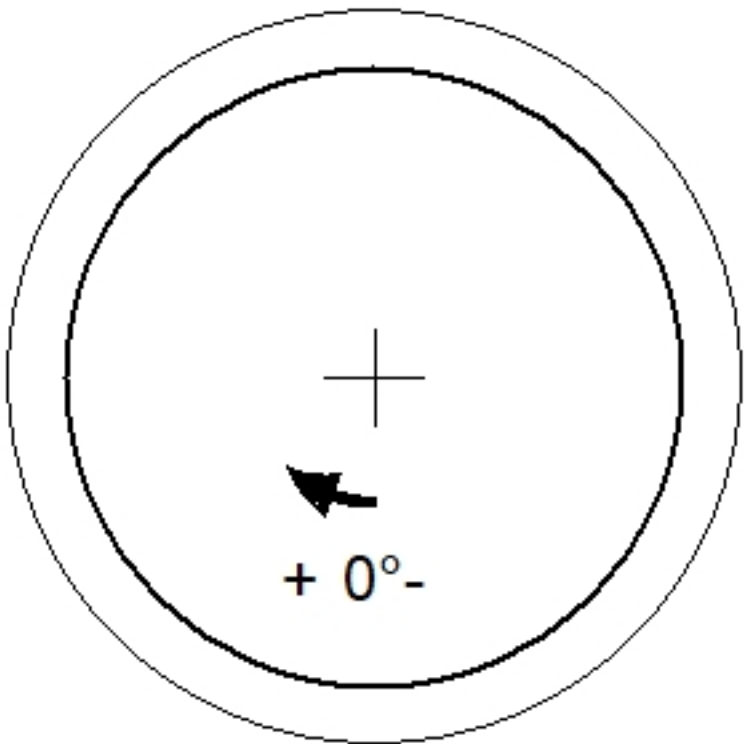
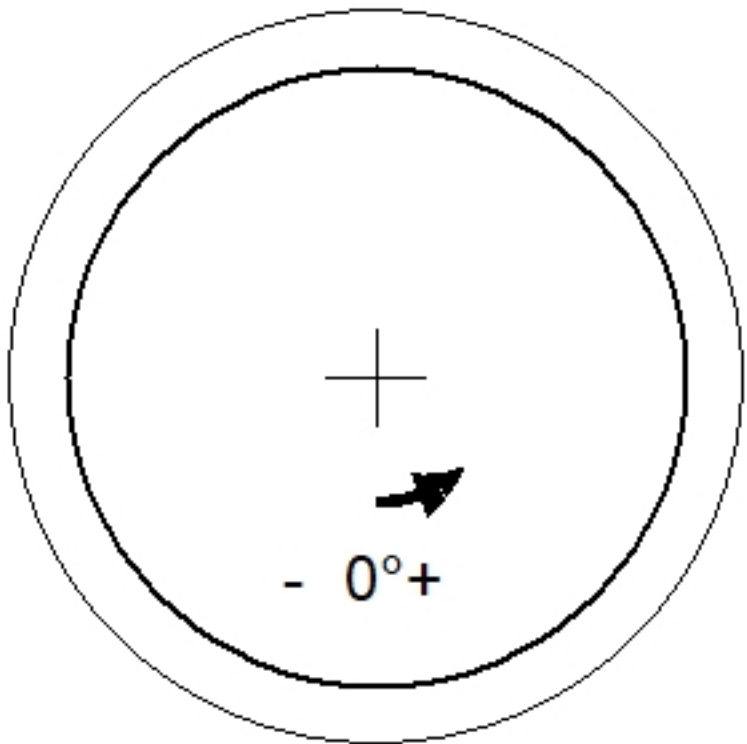
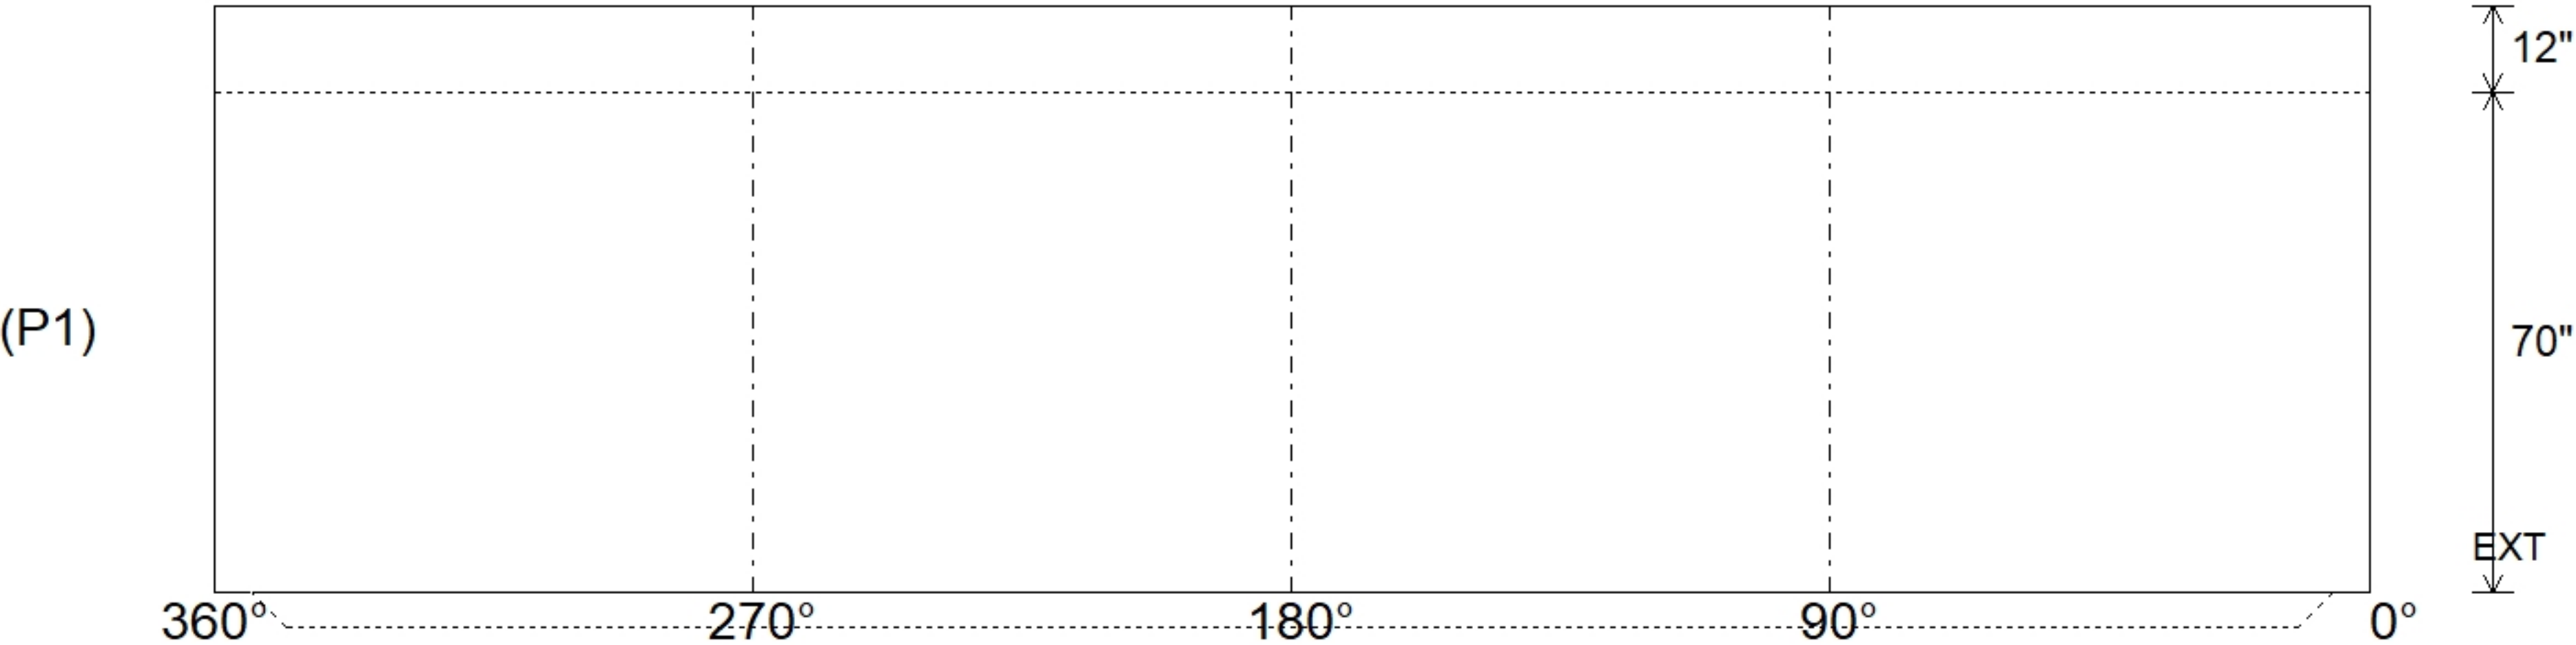
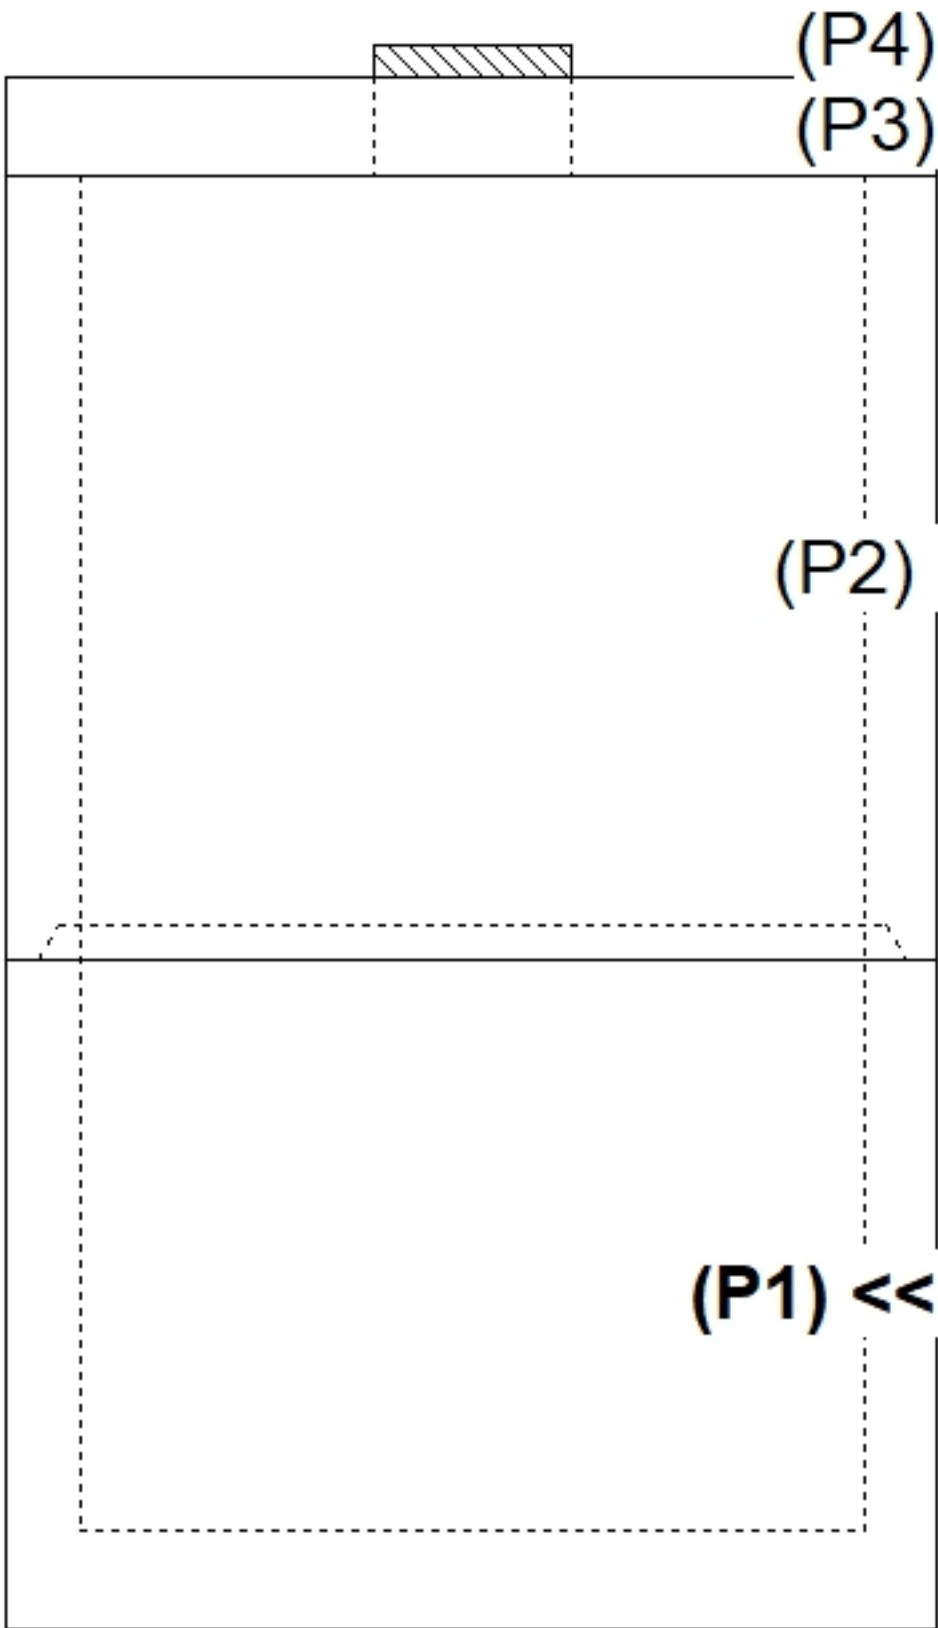


Job Name: 26-3263 ADS Hickory Commerce Center Job Location: Whites Creek, TN 37189 Contractor: ADS Advanced Drainage Systems, Inc.					Plant: Beaver Dam 10/8/2026 3:30:57 PM		Tech: J. Coppage PC:														
Structure ID: WQU B2																					
P1		MH096BAVF		MH MONOBASE 12F, Custom Ht T/n																	
P4) 24" - CASTING HEIGHT - 4" P3) 96" - MH FLAT TOP w/ 24" Conc. Hole F/F - 12" P2) 96" - MH RISER F/G - 96" P1) 96" - MH MONOBASE 12F, Custom Ht T/n - 70" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) ASSEMBLY REQUIRED - BRACKETS ONLY 1) CASTING - JBS 1072 F/C STORM 2) 96" - Conseal CS-102 1.00" (Double) 1) 24" - Conseal CS-102 1.00" (Double) 2) Hole - 32						0 lb 10340 lb 22680 lb 27716 lb 0 lb 0 lb 0 lb 250 lb 0 lb 0 lb 0 lb ----- 60986 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (JBS 1072 F/C "STORM"). 4. LIFTING ANCHORS TO BE INSTALLED ON THE OUTSIDE OF THE STRUCTURE. 5. ASSEMBLY REQUIRED - BRACKETS ONLY (ASSEMBLY TO BE COMPLETED IN THE FIELD) . REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) DBL MAT #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .24) - FLOOR (As .47) #5 BARS AT 8" C.C.E.W.													
Rim: 531'		Rim to Invert: 4.22'		Slack: 0.64"		Sump: 132"		Step Position:													
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset											
Invert 1																					
Invert 2																					
Invert 3																					
Invert 4																					
Invert 5																					
Invert 6																					
Invert 7																					
Invert 8																					
RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimenions)   INSIDE WALL DIMENSIONS  												Coating (Int): Coating (Ext):		Seam Up: Tongue Seam Dn: n/a		Wall Thickness: 9" Floor Height: 12"		Height (Int): 70" Height (Ext): 82"		Weight (Net): 27716 lb Volume (Net): 7.08cu.yd	