



Job Name: 26-3270 - German American Bank Access Roadway Job Location: Bowling Green, KY Contractor: Scott & Ritter, Inc.				Plant: 100 9/16/2026 10:22:06 AM		Tech: Jared - F PC: M. Sullivan				
Structure ID: CBI 2 ST-CI										
P1 MH048BAVF		MH BASE Custom Ht T/n								
P3) 24" x 34" - CASTING HEIGHT - 6.5" P2) 48" - MH FLAT TOP w/24"x34" Hole F/G - 12" P1) 48" - MH BASE Custom Ht T/n - 39" 1) CASTING - JBS 3080 SET (F/G/H) 1) 48" - Conseal CS-102 1.00" 2) Hole - 24 1) Hole - 20 3) MH Step ML-10-TDS-NCR - 10"						0 lb 1839 lb 3620 lb 500 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 5959 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. CASTING BY ICAST (JBS 3080 SET (F/G/H)). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.		
Rim: 527.6' Rim to Invert: 4.87' Slack: 0.94" Sump: 0" Step Position: 270°										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	522.73'	0°	0"	18" HP STORM	21.4"	Hole 24	24"	25.133"	-1.625"	0"
Invert 2	522.73'	90°	45.5"	15" HP STORM	17.7"	Hole 20	20"	20.629"	-1.25"	0"
Invert 3	522.73'	180°	91.125"	18" HP STORM	21.4"	Hole 24	24"	25.133"	-1.625"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

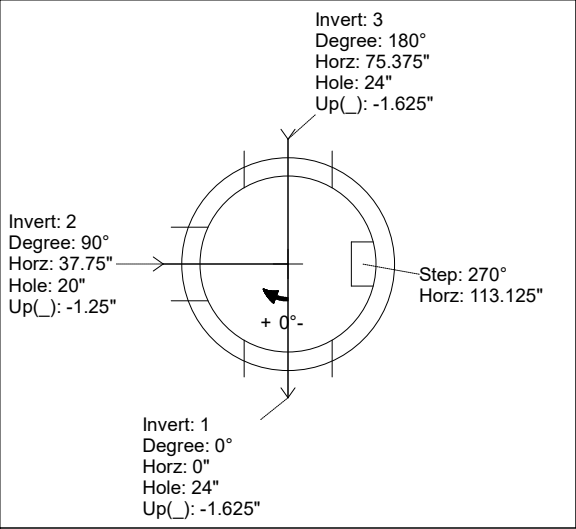

UPSIDE-DOWN VIEW (int. dimensions)

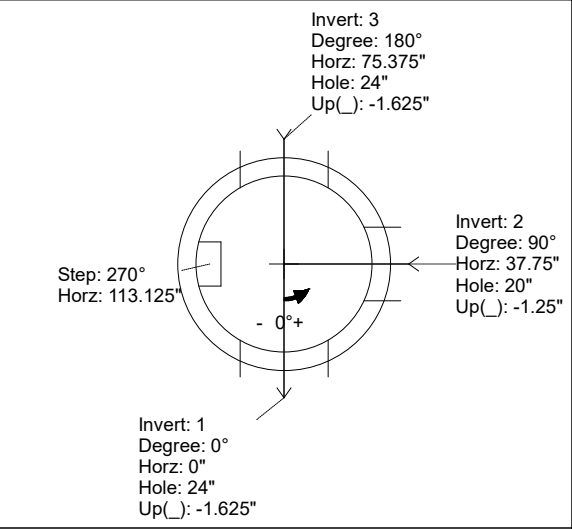

INSIDE WALL DIMENSIONS

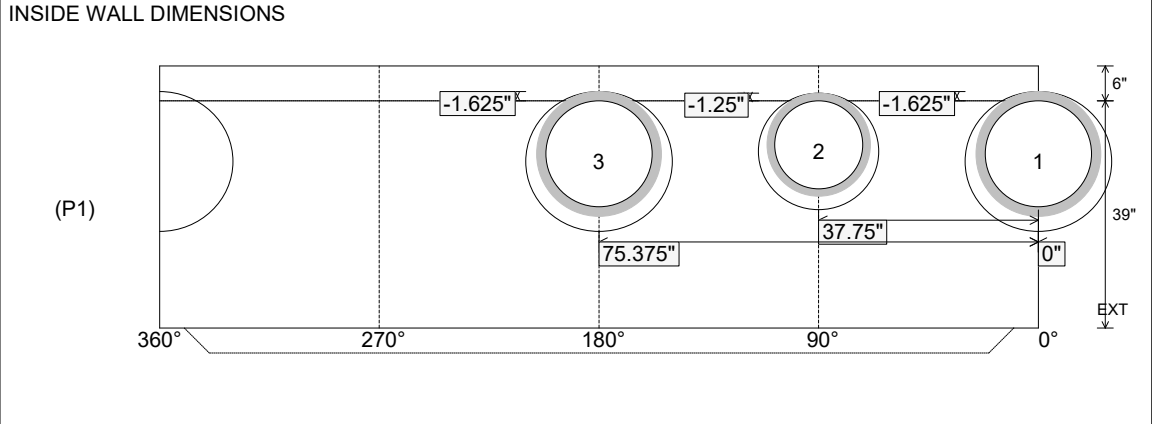

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 39" Height (Ext): 45"	Weight (Net): 3620 lb Volume (Net): 0.92cu.yd
----------------------------------	---------------------------------	--	--	--