



Job Name: 26-3270 - German American Bank Access Roadway Job Location: Bowling Green, KY Contractor: Scott & Ritter, Inc.				Plant: 100 9/16/2026 10:22:07 AM		Tech: Jared - F PC: M. Sullivan					
Structure ID: DBI 1 ST-DBI											
P1 BX3232-08BAVF				BOX BASE 8inW, 8inF, Variable Ht F/n							
P2) 32" x 32" - CASTING HEIGHT - 0" P1) 32" x 32" - BOX BASE 8inW, 8inF, Variable Ht F/n - 41" 1) CASTING - JBS 4475 Grate 1) 32" x 32" - Conseal CS-102 1.00" 1) Hole - 20				0 lb 5739 lb 459 lb 0 lb 0 lb ----- Structure Total: 6198 lb		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING BY ICAST (JBS 4475 GRATE) REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.					
Rim: 526.28'				Rim to Invert: 3.47'		Slack: 0.64"		Sump: 0"		Step Position:	
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	522.81'	0°	24"	15" HP STORM	17.7"	Hole 20	20"	20"	-1.25"	0"	
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											


RIGHT-SIDE UP VIEW (int. dimensions)

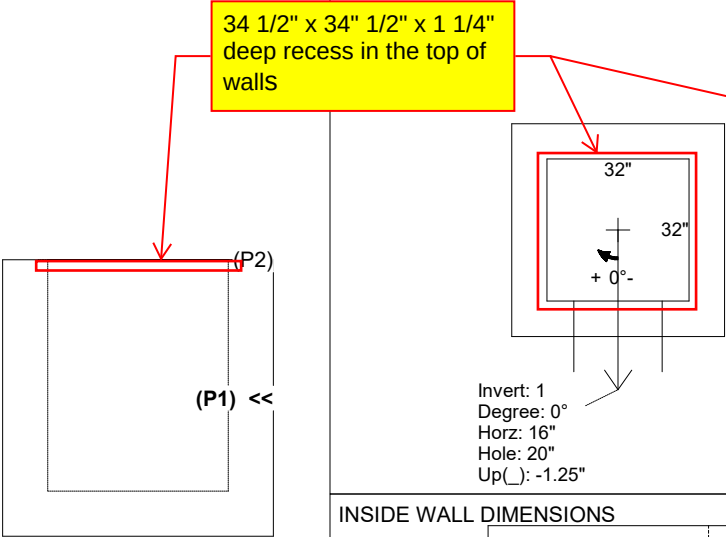

UPSIDE-DOWN VIEW (int. dimensions)

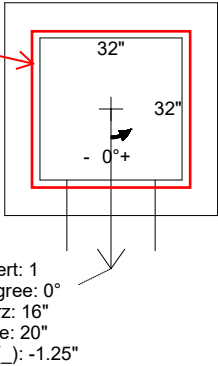

INSIDE WALL DIMENSIONS

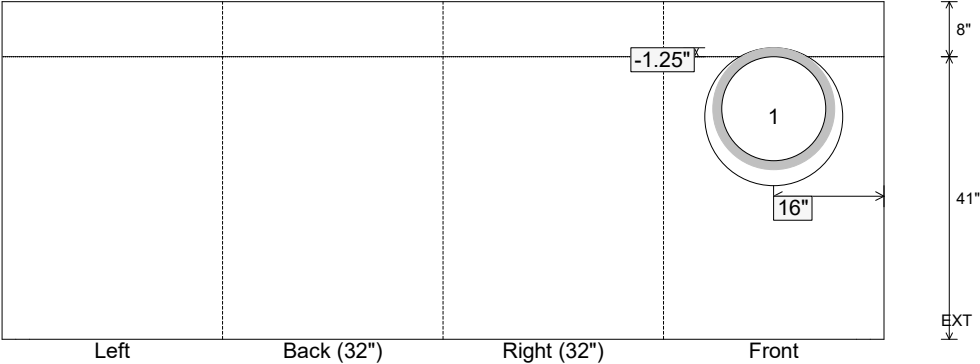

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 41" Height (Ext): 49"	Weight (Net): 5739 lb Volume (Net): 1.47cu.yd
----------------------------------	-------------------------------	--	--	--