

Job Name: 26-3280 - G.N. Miles Estates Subdivision Ph.4
Job Location: Nicholasville, KY
Contractor: PECCO, Inc.

Plant: 100

8/24/2026 11:02:08 AM

Tech: Jared - F

PC: A. Chambers



Structure ID: MH203 ST- MH

P2 MH048LD12ECC

MH FLAT TOP w/ 24" ECC Hole F/G

- P3) 24" - CASTING HEIGHT - 7"
P2) 48" - MH FLAT TOP w/ 24" ECC Hole F/G - 12"
P1) 48" - MH BASE Custom Ht T/n - 28"
1) CASTING - HOE MC-315 F/C Storm
1) 48" - Conseal CS-102 1.00"
1) 24" - Conseal CS-102 1.00"
2) Hole - 24"
2) MH Step ML-10-TDS-NCR - 10"


Structure Total:

0 lb
1561 lb
2892 lb
258 lb
0 lb
0 lb
0 lb
0 lb
0 lb
4711 lb


Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO INVERT CHANNEL.
4. CASTIN BY ICAST (HOE MC-315 F/C STORM)

REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

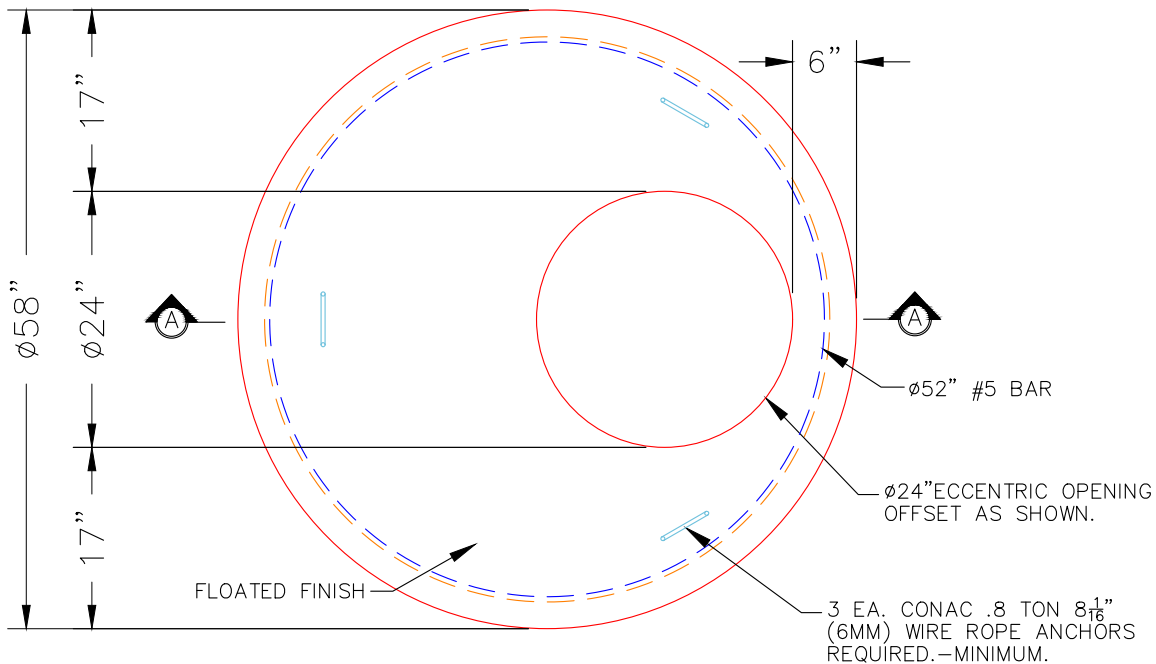

PLAN VIEW

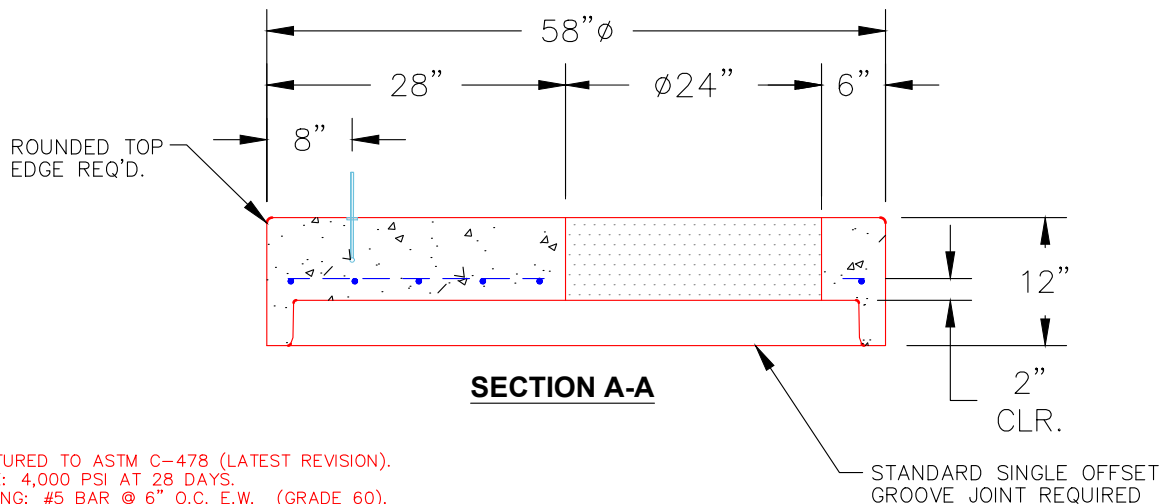

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 12"

Weight (Net): 1561 lb
Volume (Net): 0.42cu.yd