

Job Name: 26-3280 - G.N. Miles Estates Subdivision Ph.4
Job Location: Nicholasville, KY
Contractor: PECCO, Inc.

Plant: 100

8/24/2026 11:02:10 AM

Tech: Jared - F

PC: A. Chambers



Structure ID: MH502 ST- MH

P3 GR4

GRADE RING F/F

- P4) 24" - CASTING HEIGHT - 7"
P3) 24" - GRADE RING F/F - 4"
P2) 48" - ECC CONE w/ 24" HOLE F/G - 24"
P1) 48" - MH BASE T/n - 30"
1) CASTING - HOE MC-315 F/C Storm
1) 48" - Conseal CS-102 1.00"
1) 24" - Conseal CS-102 1.00"
2) Hole - 20
5) MH Step ML-10-TDS-NCR - 10"

Structure Total:

0 lb
270 lb
1550 lb
3155 lb
258 lb
0 lb
0 lb
0 lb
0 lb

5233 lb


Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO INVERT CHANNEL
4. CASTING BY ICAST (HOE MC-315 F/C STORM)


REINFORCING PER ASTM A615 (GRADE 60).
- CONE (As .12)
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

NOTES:

1. GRADE RINGS MEET OR EXCEED THE FOLLOWING SPECIFICATIONS:
-CONCRETE: 4,000 PSI @ 28 DAYS.
-REINFORCING: (1) #3 HOOP CENTERED (GRADE 60)
2. WEIGHT: 4" 270 LBS.

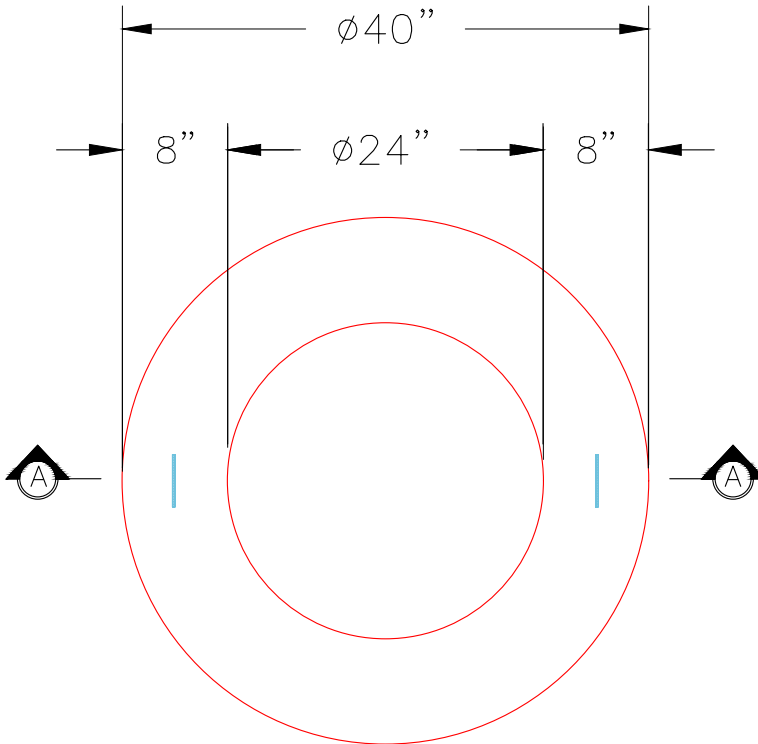


PLAN VIEW

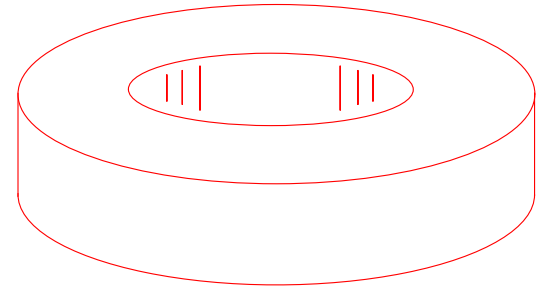

ISOMETRIC VIEW

2X CONAC WRA016 WIRE
ROPE LIFTING ANCHORS

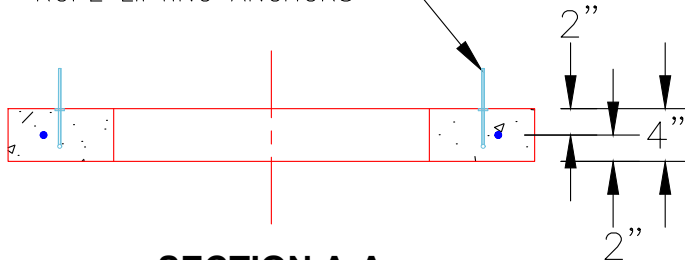

SECTION A-A

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 4"

Weight (Net): 270 lb
Volume (Net): 0.07cu.yd