



Job Name: 26-3292 ADS Kroger V#435 Job Location: Murray, KY Contractor: ADS Advanced Drainage Systems, Inc.					Plant: Beaver Dam 8/20/2026 9:27:33 AM		Tech: S. Felletter PC: T. Ryan				
Structure ID: D3											
P3		MH096RS66		MH RISER NO STEPS T/G							
P5) 24" - CASTING HEIGHT - 7" P4) 96" - MH FLAT TOP w/ 24" Conc. Hole F/G - 17" P3) 96" - MH RISER NO STEPS T/G - 66" P2) 96" - MH RISER NO STEPS T/G - 84" P1) 96" - MH BASE T/h - 24" 1) ASSEMBLY REQUIRED - BRACKETS ONLY 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) CASTING - HOE MC-375 F/C Storm 3) 96" - Conseal CS-102 1.25" (Double) 2) Hole - 30					0 lb 10473 lb 15359 lb 20926 lb 12831 lb 0 lb 0 lb 0 lb 271 lb 0 lb 0 lb ----- 59859 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE MC-375 F/C "STORM"). 4. ASSEMBLY REQUIRED - BRACKETS ONLY. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .24) - FLOOR (As .47) #5 BARS AT 8" C.C.E.W. Lifting anchors to be installed on the outside of the structure				
Rim: 496.49'		Rim to Invert: 5.58'		Slack: 0.96"		Sump: 132"		Step Position: 0°			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	490.91'	0°	0"	24" HDPE	27.8"	Hole 30	30"	30.511"	16"	0"	
Invert 2	490.91'	135°	134.303"	24" HDPE	27.8"	Hole 30	30"	30.511"	16"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

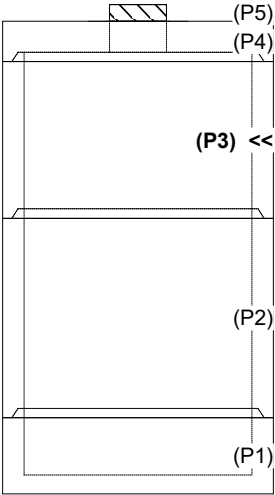

(P5)
(P4)
(P3) <<
(P2)
(P1)


RIGHT-SIDE UP VIEW (int. dimensions)

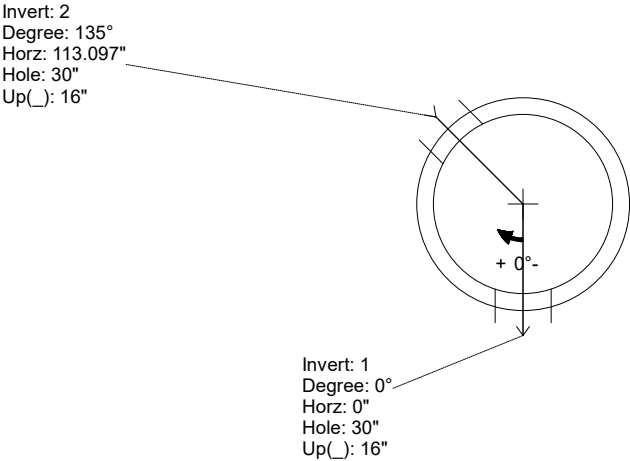

Invert: 2
Degree: 135°
Horz: 113.097"
Hole: 30"
Up(): 16"

Invert: 1
Degree: 0°
Horz: 0"
Hole: 30"
Up(): 16"

INSIDE WALL DIMENSIONS

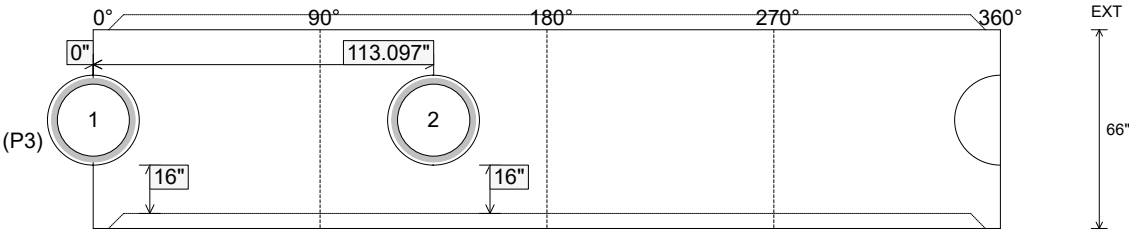

0° 90° 180° 270° 360°

113.097"

16"

16"

EXT 66"

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 9" Floor Height: 0"	Height (Int): 66" Height (Ext): 66"	Weight (Net): 15359 lb Volume (Net): 3.92cu.yd
----------------------------------	------------------------------------	--	--	---