




Job Name: 26-3341 - C&P Trucking Job Location: Owensboro, KY Contractor: Winwater Hartford KY Co.					Plant: 100 8/26/2026 10:53:23 AM		Tech: Jared - F PC: A. Chambers				
Structure ID: AA1 ST-DBI											
P1 BX2424-08BAVF			BOX BASE 8inW, 8inF, Variable Ht F/n								
P2) 24" x 24" - CASTING HEIGHT - 4" P1) 24" x 24" - BOX BASE 8inW, 8inF, Variable Ht F/n - 16" 1) CASTING - HOE 280T F/G 1) 24" x 24" - Conseal CS-102 1.00" 1) DOGHOUSE INVRTD - 16" 1) DOGHOUSE INVRTD - 14"						0 lb 2115 lb 182 lb 0 lb 0 lb 0 lb ----- Structure Total: 2297 lb		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE 280T F/G). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.			
Rim: 407.81'		Rim to Invert: 1.75'		Slack: 2"		Sump: 1"		Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector		Hole	Horz Size	Up ()	Offset
Invert 1	406.06'	40°	26.375"	10" VCP	12.05"	DOGHOUSE INVRTD 16"		16"	20.887"	0"	-8"
Invert 2	406.06'	180°	20"	10" HDPE	11.4"	DOGHOUSE INVRTD 14"		14"	14"	0.25"	0"
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											





INSIDE WALL DIMENSIONS

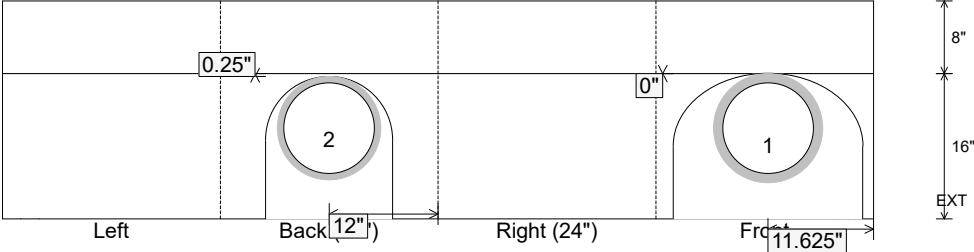

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 16" Height (Ext): 24"	Weight (Net): 2115 lb Volume (Net): 0.54cu.yd
----------------------------------	-------------------------------	--	--	--