




Job Name: 26-3341 - C&P Trucking Job Location: Owensboro, KY Contractor: Winwater Hartford KY Co.				Plant: 100 8/26/2026 10:53:24 AM		Tech: Jared - F PC: A. Chambers				
Structure ID: AA3 ST-DBI										
P1 BX2424-08BAVF				BOX BASE 8inW, 8inF, Variable Ht F/n						
P2) 24" x 24" - CASTING HEIGHT - 4" P1) 24" x 24" - BOX BASE 8inW, 8inF, Variable Ht F/n - 23" 1) CASTING - HOE 280T F/G 1) 24" x 24" - Conseal CS-102 1.00" 2) Hole - 14				0 lb 2837 lb 182 lb 0 lb 0 lb ----- 3019 lb Structure Total:		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE 280T F/G). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.				
Rim: 408.77' Rim to Invert: 2.34' Slack: 1.83' Sump: 0.75' Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	406.43'	340°	17"	10" HDPE	11.4"	Hole 14	14"	14.898"	0"	4"
Invert 2	406.43'	180°	20"	10" HDPE	11.4"	Hole 14	14"	14"	0"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

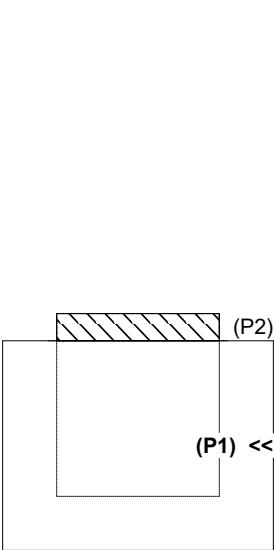

RIGHT-SIDE UP VIEW (int. dimensions)

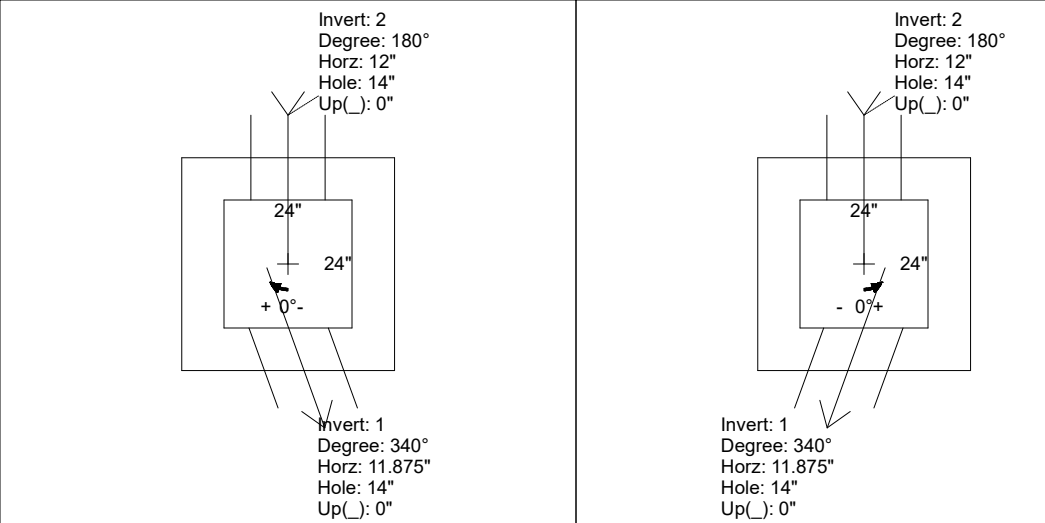

UPSIDE-DOWN VIEW (int. dimensions)

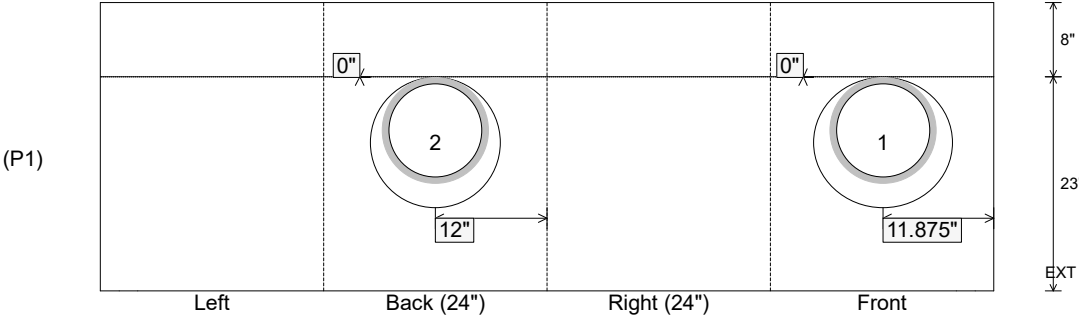

INSIDE WALL DIMENSIONS

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: n/a

Wall Thickness: 8"
Floor Height: 8"

Height (Int): 23"
Height (Ext): 31"

Weight (Net): 2837 lb
Volume (Net): 0.72cu.yd