



Job Name: 26-3386 - Town Branch WWTP Job Location: 301 Jimmie Campbell Drive Contractor: Walker Principles				Plant: Beaver Dam 9/15/2026 2:52:31 PM		Tech: J. Coppage PC: T. Ryan					
Structure ID: LEX INLET TYPE B											
P1 BX2436-08BVF				BOX BASE 8inW, 8inF, Variable Ht							
P2) 24" x 36" - CASTING (cast in) - 3" P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht - 27" 1) 24" x 36" - Conseal CS-102 1.00" 1) Hole - 34x24				0 lb 3721 lb 0 lb 0 lb ----- 0 lb Structure Total: 3721 lb		Structure Notes: . 1. JR HOE HOE-700 F/G PROVIDED BY ICAST. 2. PER LEFUCG CBI TYPE / ASTM C913 SPEC'S. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (grade 60). - H-20 LOADING - WALLS #5 BARS AT 8" C.C.E.W. - FLOOR #5 BARS AT 8" C.C.E.W. 5. PRODUCTION TO PLACE A 40" LONG X 3.25" WIDE X 4" DEEP RECESS IN THE TOP OF THE 90 AND 270 DEGREE WALLS FOR THE CASTING TO SIT INTO.					
Rim: 895.81'				Rim to Invert: 2.32'		Slack: 0.84"		Sump: 0"		Step Position:	
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1	893.49'	90°	26"	23" x 14" ELL RCP	28.5" x 19.5"	Hole 34x24	34" x 24"	34"	-2.75"	0"	
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											


RIGHT-SIDE UP VIEW (int. dimensions)

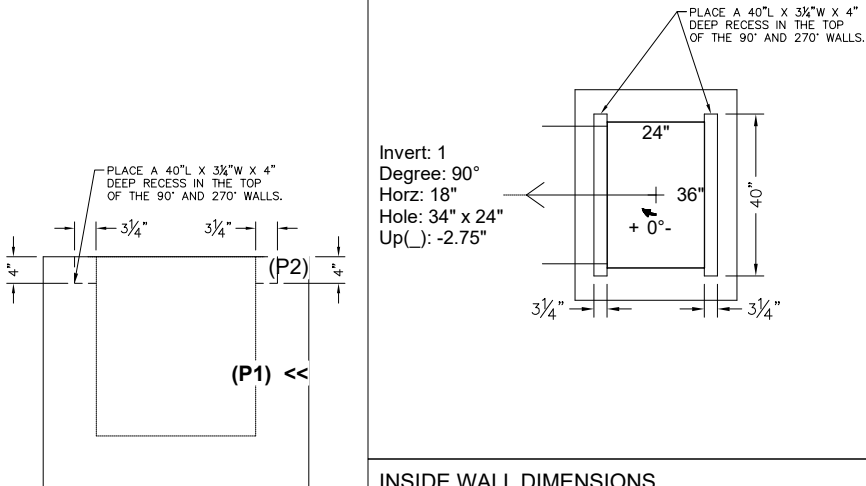

UPSIDE-DOWN VIEW (int. dimensions)

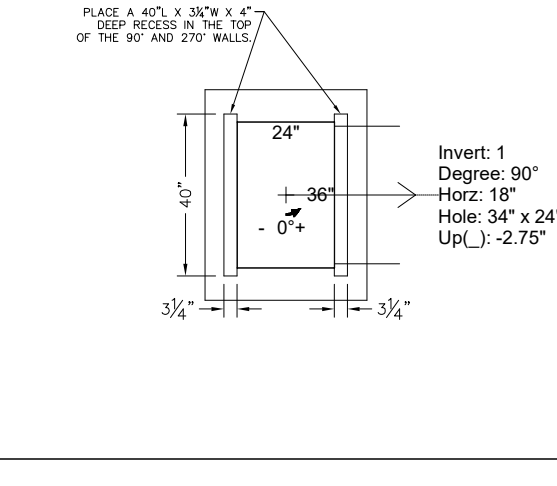

INSIDE WALL DIMENSIONS

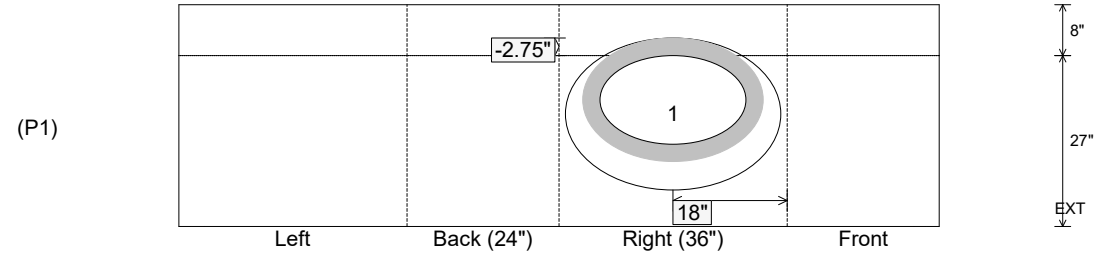

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 27" Height (Ext): 35"	Weight (Net): 3721 lb Volume (Net): 0.95cu.yd
----------------------------------	-------------------------------	--	--	--