

Job Name: 26-3439 - Vertiv Warehouse
Job Location: Ironton, OH 45638
Contractor: J&H Reinforcing & Structural Erectors

Plant: Beaver Dam
9/17/2026 2:22:12 PM

Tech: J. Coppage
PC: M. Sullivan



Structure ID: JB-5

P5 MH048CN36

ECC CONE w/ 24" HOLE



P6) 24" - CASTING HEIGHT - 7"
P5) 48" - ECC CONE w/ 24" HOLE - 36"
P4) 48" - MH RISER - 60"
P3) 120" x 120" - CB TRANSITION SLAB 48" HOLE - 15"
P2) 120" x 120" - BOX RISER 10inW, Variable Ht - 120"
P1) 120" x 120" - P.I.P. BY OTHERS - BTM SLAB - 0"
2) 48" - SGL 1"x14.5' Butyl
1) Hole - 90
1) DOGHOUSE INVRTD - 24"x24"
1) DOGHOUSE - 90"x90"
19) MH Step ML-10-TDS-NCR - 10"

0 lb
3000 lb
4192 lb
22392 lb
39878 lb
0 lb
0 lb
0 lb
0 lb
0 lb
0 lb

69462 lb

Structure Notes: .
1. JR HOE MC-375 PROVIDED BY ICAST.
2. PER ASTM C913/C478 SPECIFICATIONS.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. REINFORCEMENT PER ASTM A615 (GRADE 60)
- 48" CONE (As .12)
- 48" RISER (As .12)
- TRANS SLAB
-- TOP MAT: #4 BAR @ 10"
-- BOT. MAT: #5 BAR @ 6"
- WALLS: DBL MATS #5 BAR @ 8" O.C.E.W.
5. BOTTOM RISER (P2) TO BE DELIVERED
W/ THE STYROFOAM & REBAR IN PLACE FOR
INV. #1 OPENING & REMOVED IN THE FIELD
BY OTHERS ONCE IT IS SET IN PLACE.

Structure Total:

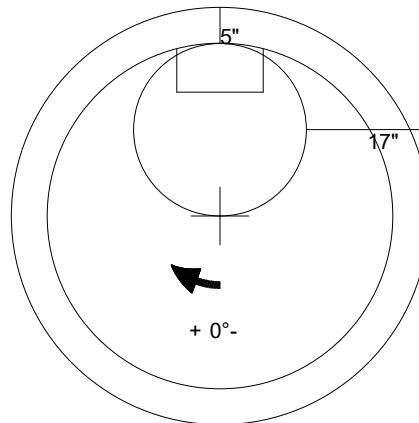

48" - ECC CONE w/ 24" HOLE - 36" - (P5)

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 36"

Weight (Net): 3000 lb
Volume (Net): 0.5cu.yd