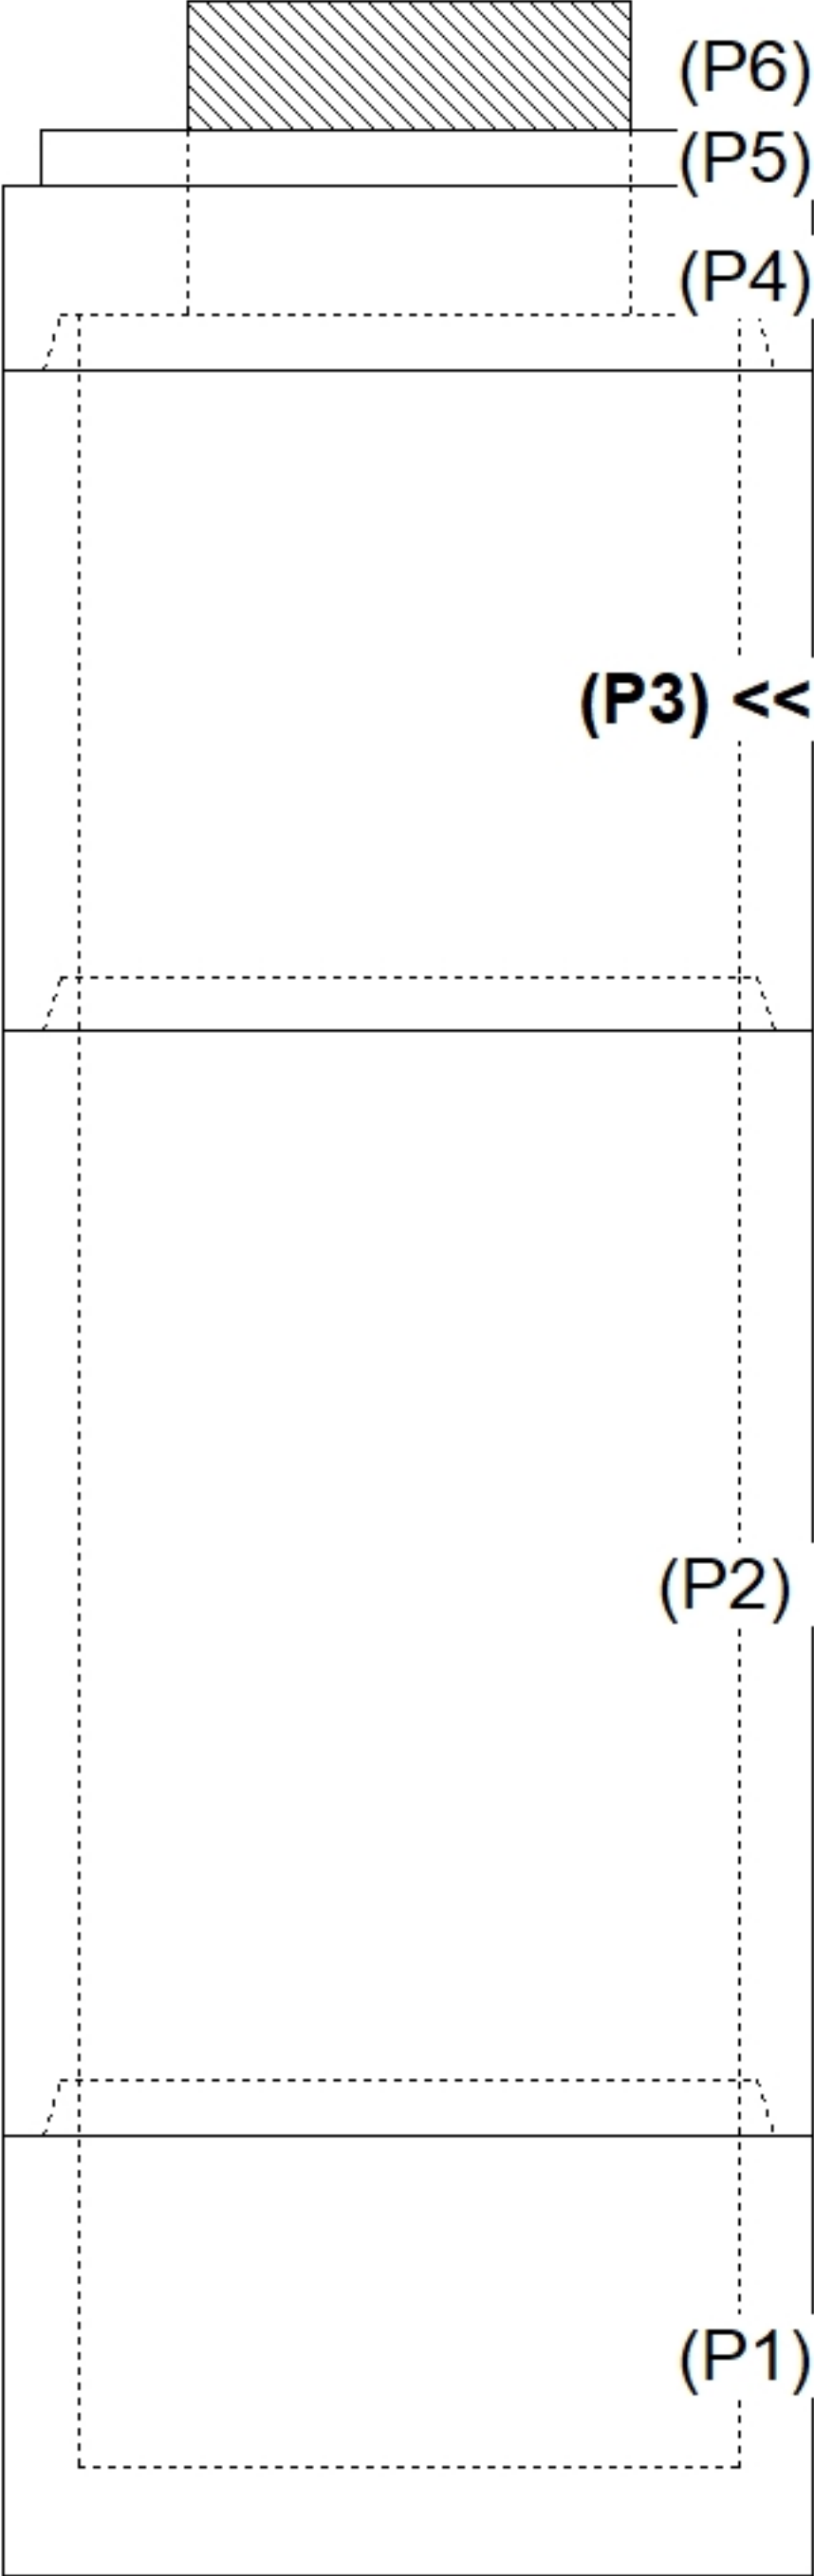
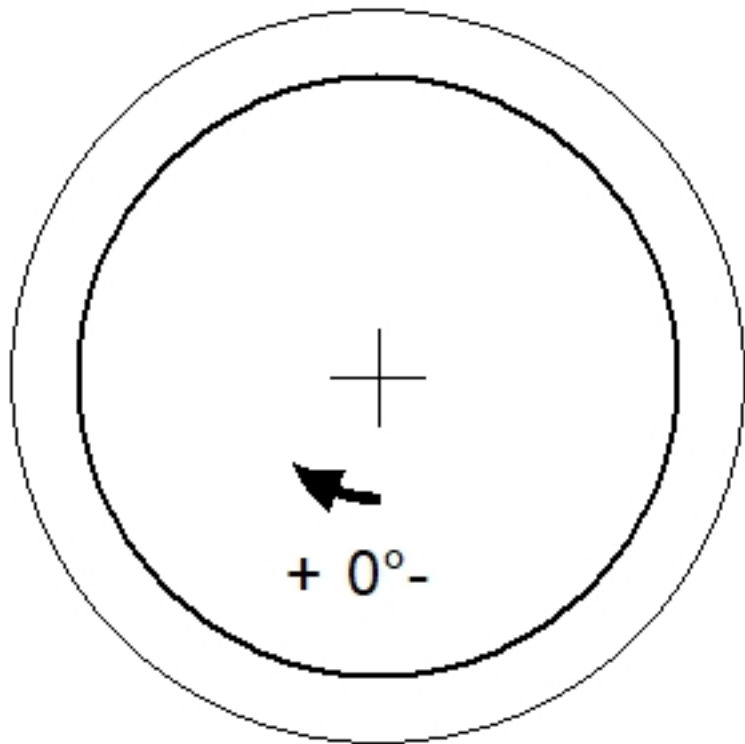
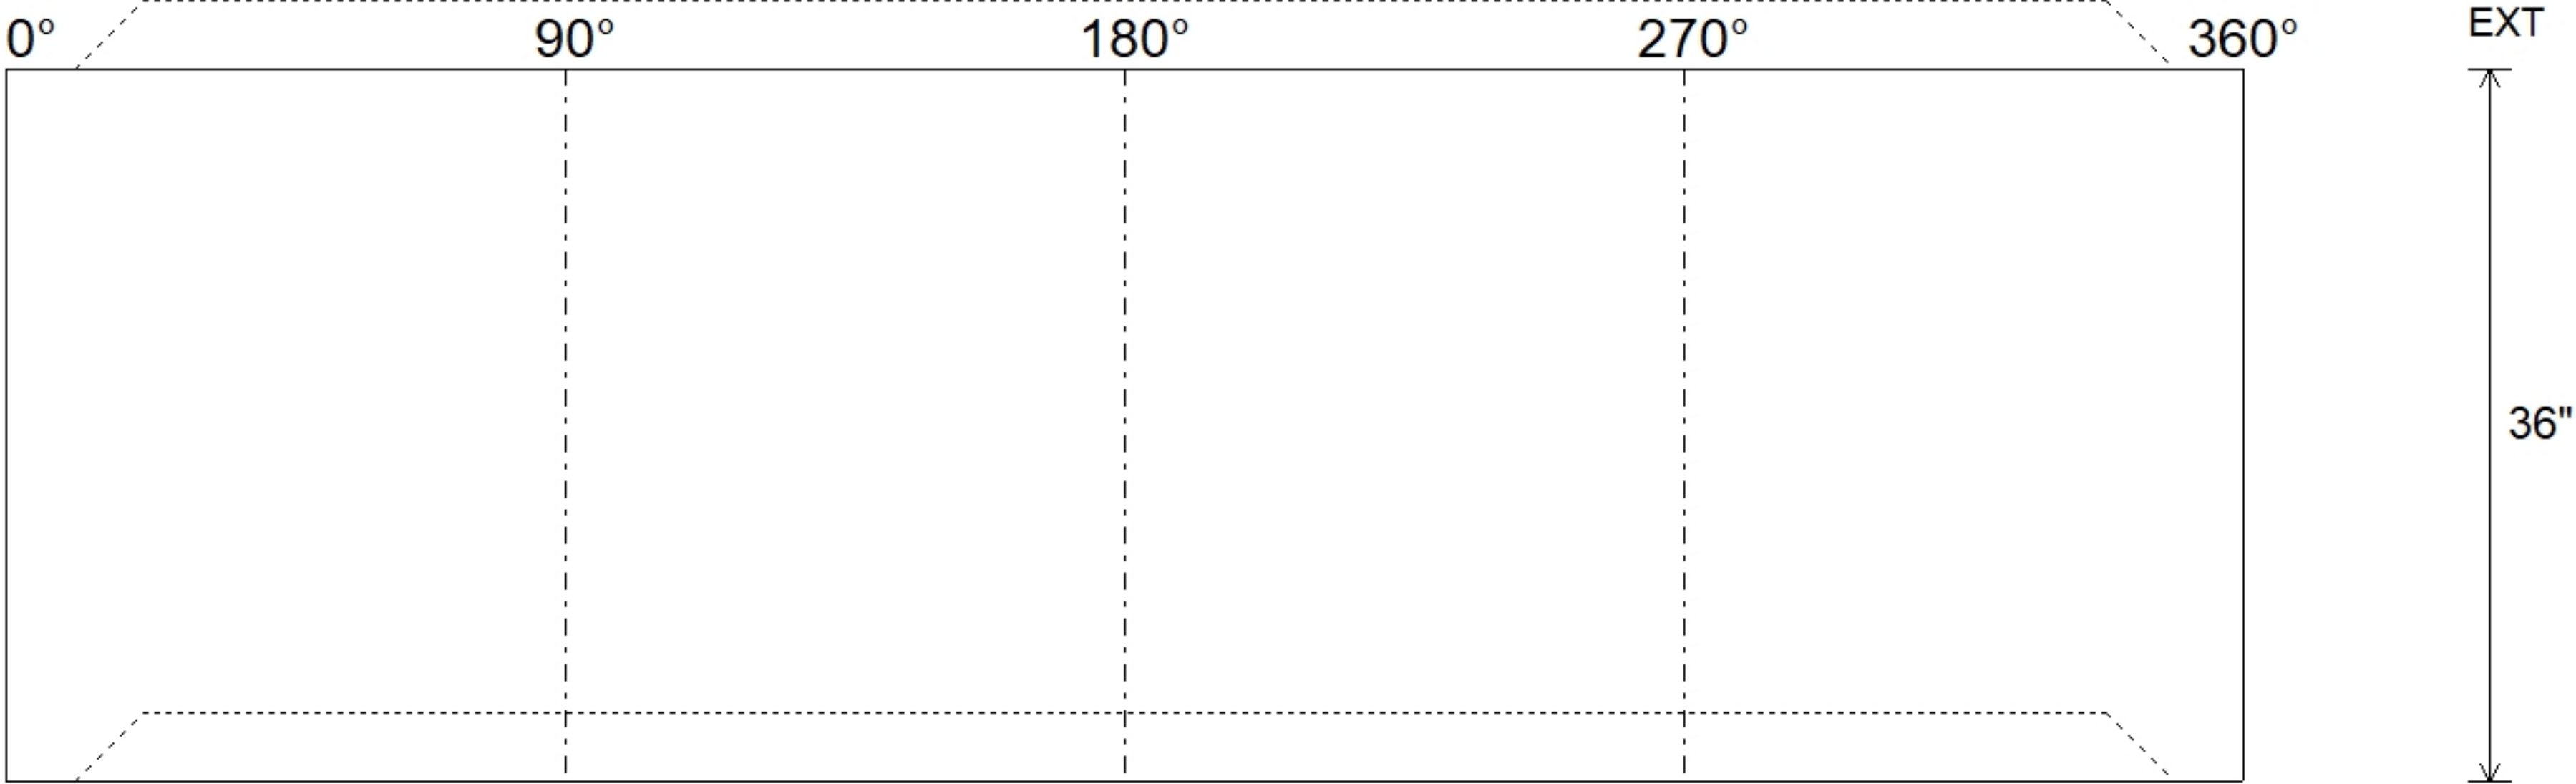


Job Name: 26-3522 ADS Miller-Blankenbaker Rd. Subdivision				Plant: Beaver Dam		Tech: S. Felletter					
Job Location: Jeffersontown, KY				9/3/2026 2:23:58 PM		PC: M. Sullivan					
Contractor: ADS Advanced Drainage Systems, Inc.											
Structure ID: STR-19											
P3		MH036RS36		MH RISER T/G							
P6) 24" - CASTING HEIGHT - 7" P5) 24" - GRADE RING F/F - 3" P4) 36" - MH FLAT TOP w/ 24" Ctr. Hole F/G - 10" P3) 36" - MH RISER T/G - 36" P2) 36" - MH RISER T/G - 60" P1) 36" - MH BASE T/n - 18" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) ASSEMBLY REQUIRED 1) CASTING - HOE MC-375 F/C Storm 3) 36" - Conseal CS-102 1.00" (Double) 2) 24" - Conseal CS-102 1.00" (Double) 2) Hole - 12				0 lb 202 lb 896 lb 1518 lb 2454 lb 1525 lb 0 lb 0 lb 0 lb 271 lb 0 lb 0 lb 0 lb ----- Structure Total: 6867 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. LIFTING ANCHORS TO BE INSTALLED ON THE OUTSIDE OF THE STRUCTURE 4. CASTING BY ICAST (HOE MC-375 F/C "STORM"). . REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.					
Rim: 710.75'		Rim to Invert: 6.65'		Slack: 0.76"		Sump: 54.96"		Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)											
											
				INSIDE WALL DIMENSIONS							
											
Coating (Int):				Seam Up: Tongue		Wall Thickness: 4"		Height (Int): 36"		Weight (Net): 1518 lb	
Coating (Ext):				Seam Dn: Groove		Floor Height: 0"		Height (Ext): 36"		Volume (Net): 0.39cu.yd	