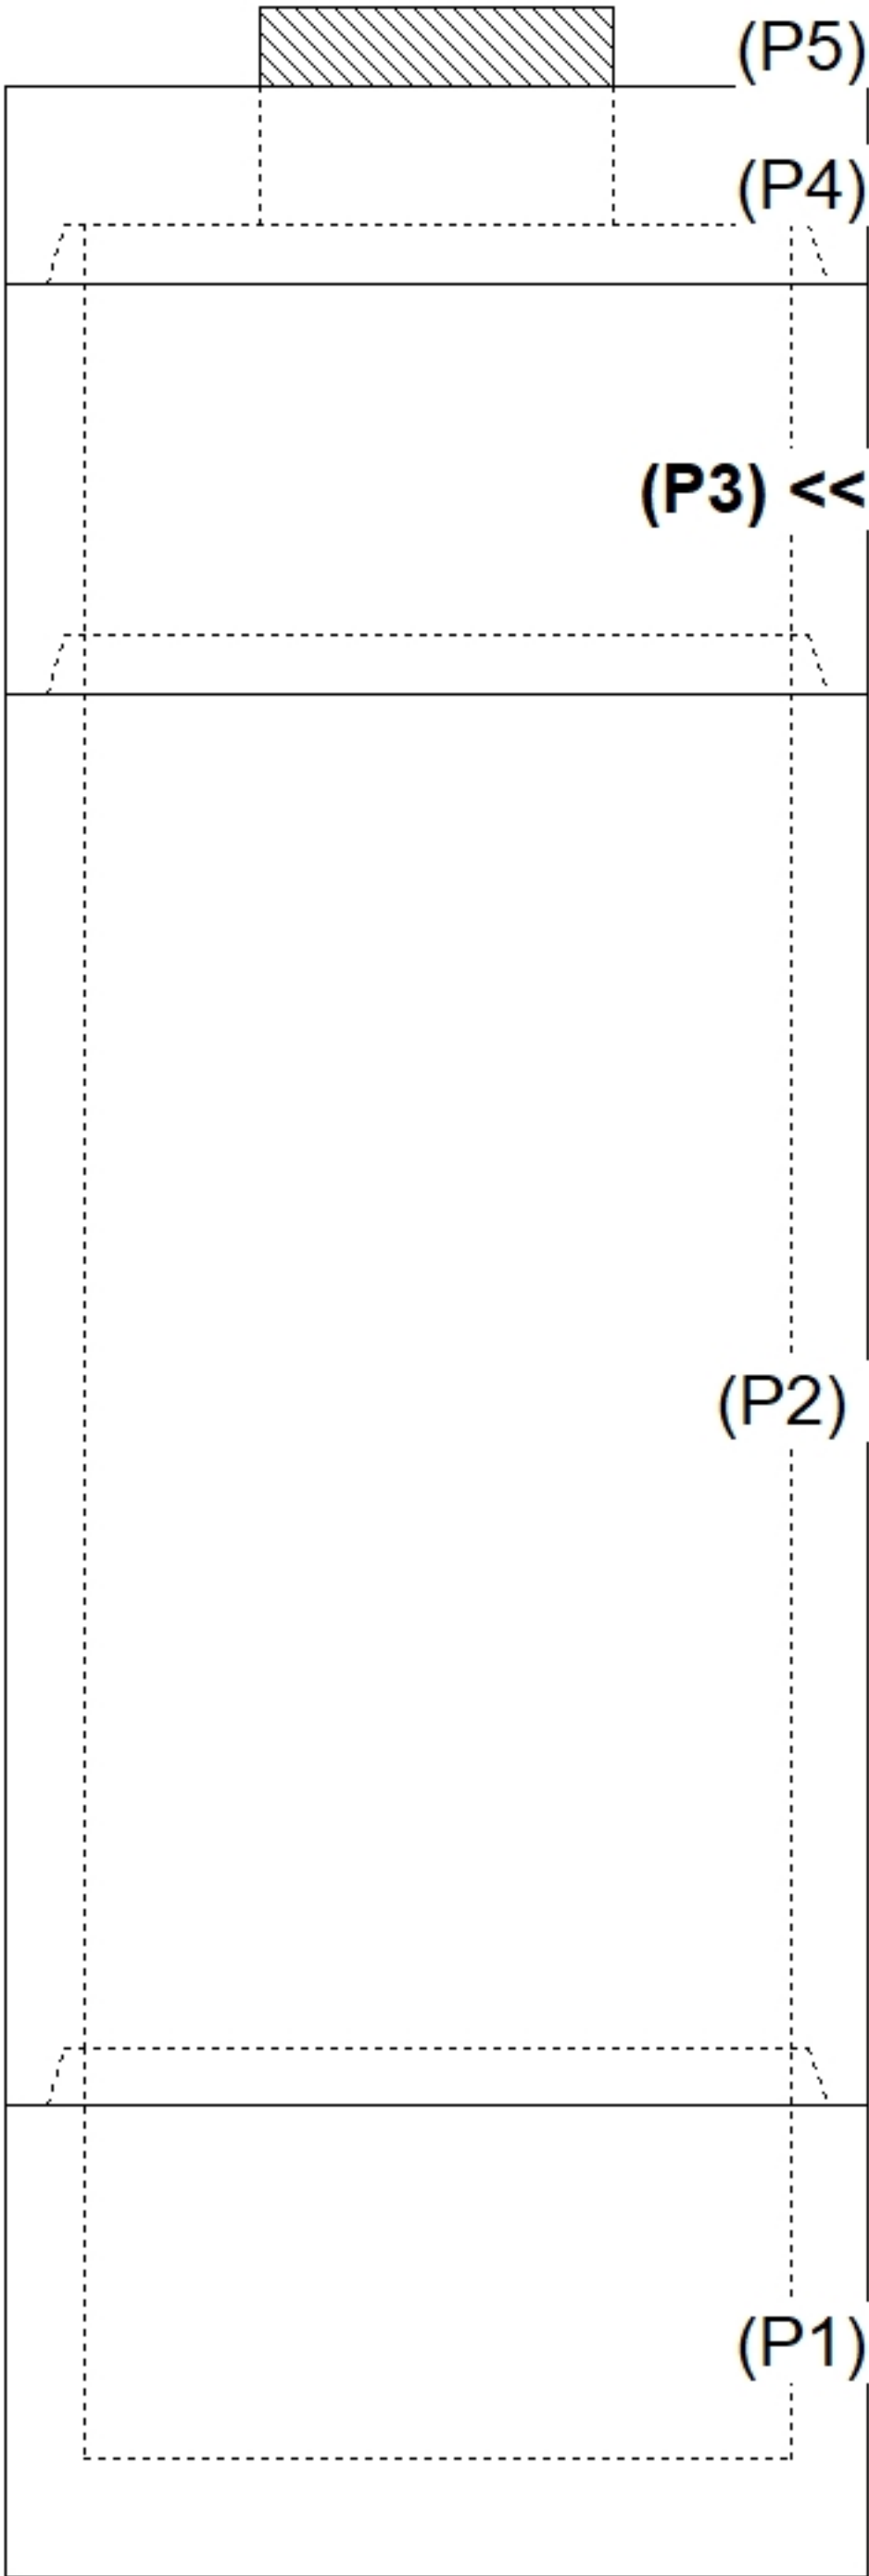
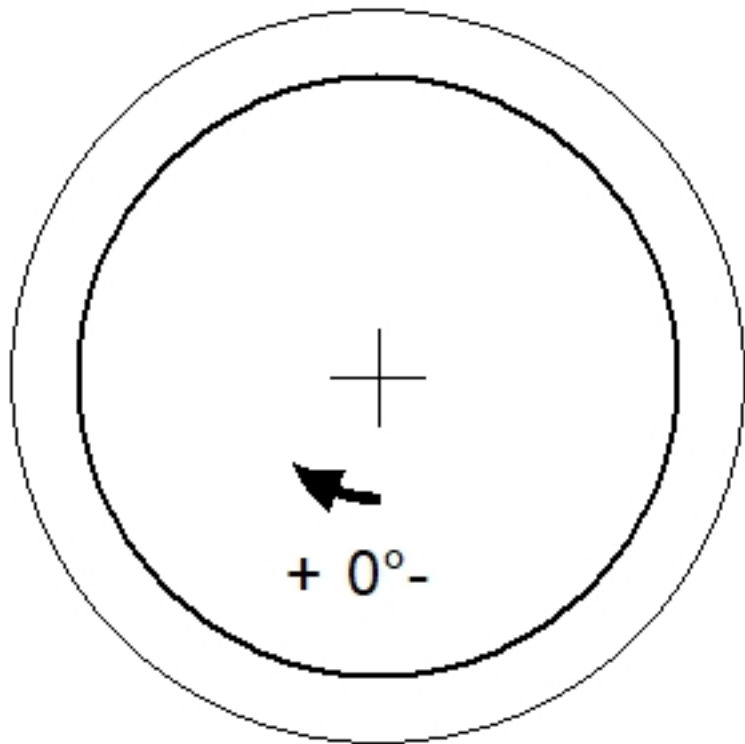
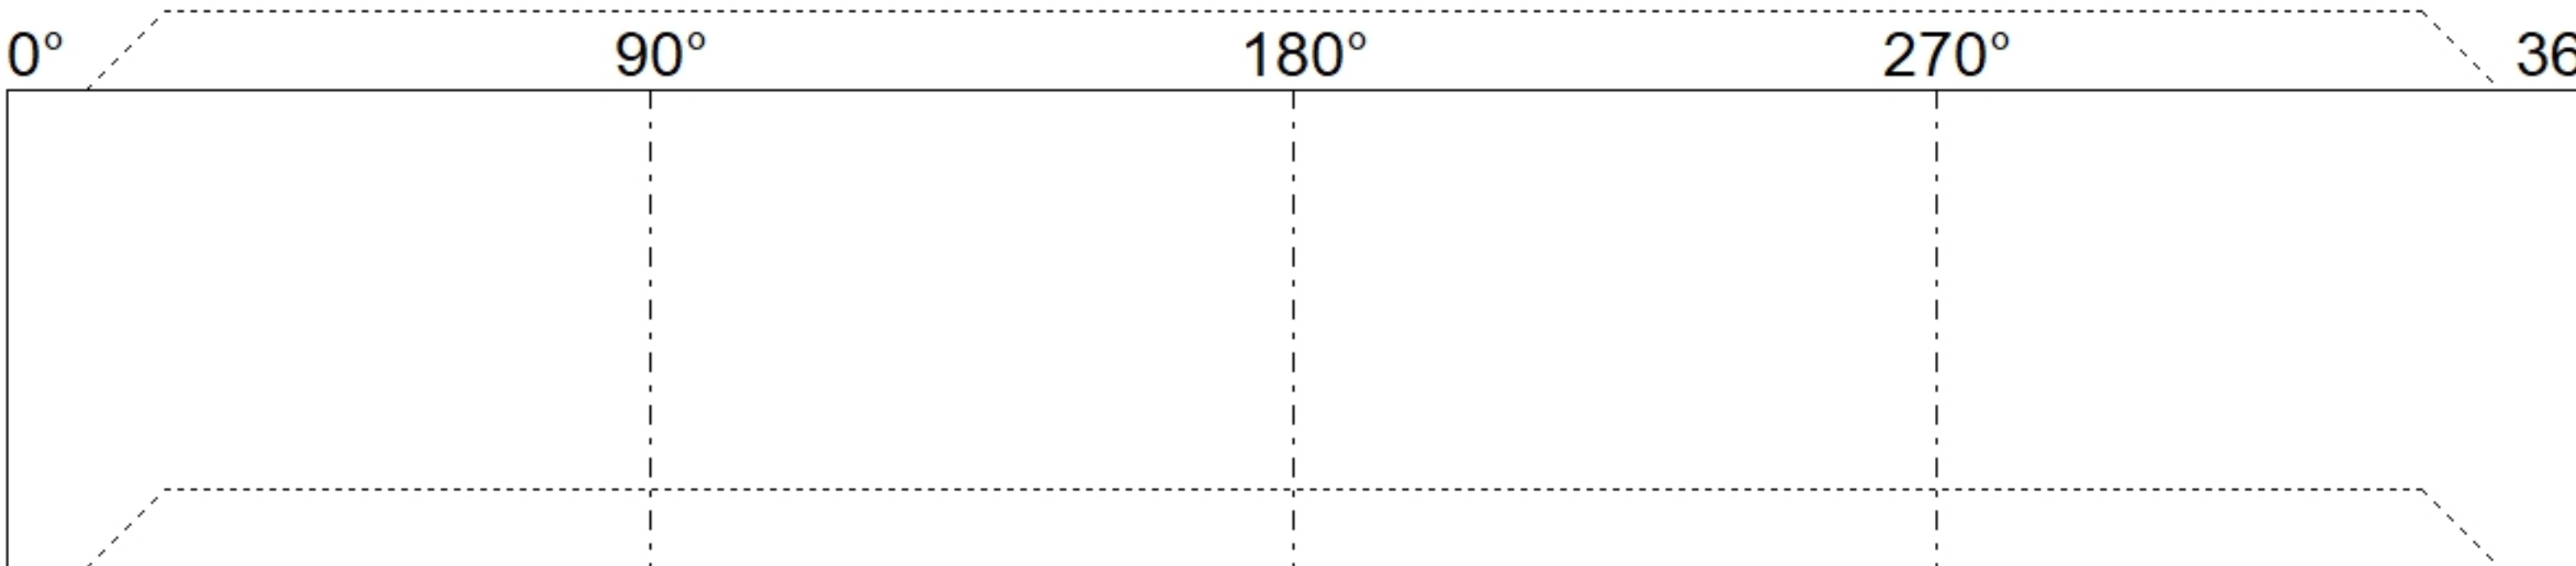


Job Name: 26-3579 ADS Zaxby's Central Ave Job Location: Louisville, KY Contractor: ADS Advanced Drainage Systems, Inc.					Plant: Beaver Dam 9/17/2026 8:47:49 AM		Tech: S. Felletter PC: M. Sullivan						
Structure ID: 1													
P3		MH036RSVF		MH RISER Custom Ht T/G									
P5) 18" x 18" - CASTING HEIGHT - 4" P4) 36" - MH FLAT TOP w/ 18" X 18" Ctr. Hole F/G - 10" P3) 36" - MH RISER Custom Ht T/G - 21" P2) 36" - MH RISER T/G - 72" P1) 36" - MH BASE T/n - 18" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) ASSEMBLY REQUIRED 1) CASTING - HOE 165A F/G 3) 36" - Conseal CS-102 1.00" (Double) 1) 18" x 18" - Conseal CS-102 1.00" (Double) 2) Hole - 12						0 lb 730 lb 886 lb 2941 lb 1525 lb 0 lb 0 lb 0 lb 138 lb 0 lb 0 lb 0 lb ----- 6219 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. LIFTING ANCHORS TO BE INSTALLED ON THE OUTSIDE OF THE STRUCTURE 4. CASTING BY ICAST (HOE 165-A F/G). . REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.					
Rim: 466.5' Rim to Invert: 5.87' Slack: 0.4" Sump: 54.96" Step Position: 0°													
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset			
Invert 1													
Invert 2													
Invert 3													
Invert 4													
Invert 5													
Invert 6													
Invert 7													
Invert 8													
RIGHT-SIDE UP VIEW (int. dimensions)													
													
INSIDE WALL DIMENSIONS													
		EXT 21"											
Coating (Int): Coating (Ext):				Seam Up: Tongue Seam Dn: Groove		Wall Thickness: 4" Floor Height: 0"		Height (Int): 21" Height (Ext): 21"		Weight (Net): 886 lb Volume (Net): 0.23cu.yd			