

Job Name: 26-3579 ADS Zaxby's Central Ave
Job Location: Louisville, KY
Contractor: ADS Advanced Drainage Systems, Inc.

Plant: Beaver Dam
9/11/2026 4:22:45 PM

Tech: S. Felletter
PC: M. Sullivan



Structure ID: 1

P4 MH036LD10S

MH FLAT TOP w/ 18" X 18" Ctr. Hole F/G


- P5) 18" x 18" - CASTING HEIGHT - 4"
P4) 36" - MH FLAT TOP w/ 18" X 18" Ctr. Hole F/G - 10"
P3) 36" - MH RISER Custom Ht T/G - 21"
P2) 36" - MH RISER T/G - 72"
P1) 36" - MH BASE T/n - 18"
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
1) ASSEMBLY REQUIRED
1) CASTING - HOE 165A F/G
3) 36" - Conseal CS-102 1.00" (Double)
1) 18" x 18" - Conseal CS-102 1.00" (Double)
2) Hole - 12

0 lb
730 lb
886 lb
2941 lb
1525 lb
0 lb
0 lb
0 lb
138 lb
0 lb
0 lb
0 lb
Structure Total: 6219 lb

Structure Notes:
1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. LIFTING ANCHORS TO BE INSTALLED ON THE OUTSIDE OF THE STRUCTURE
4. CASTING BY ICAST (HOE 165-A F/G).
REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" C.C. E.W. (GRADE 60).

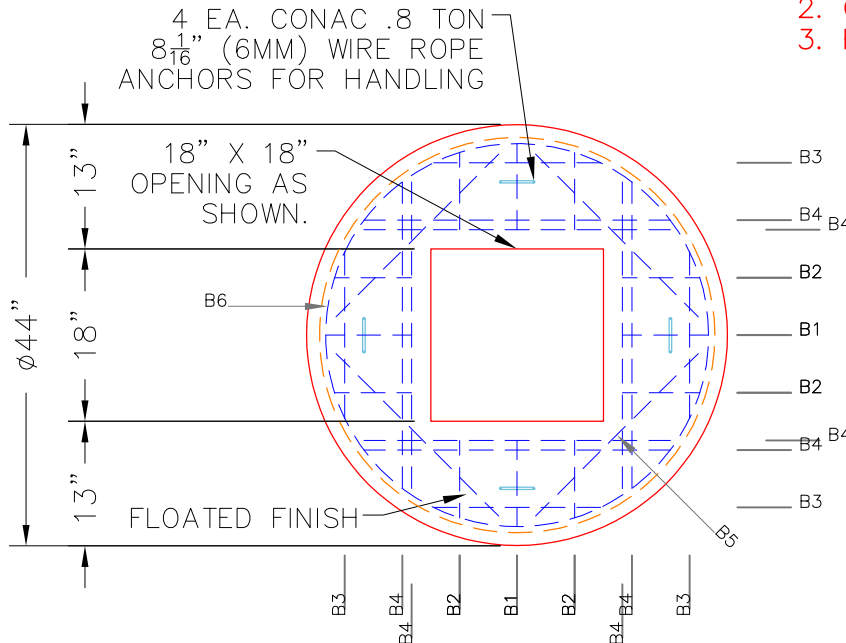


REBAR TAKEOFF SUMMARY

BAR	SIZE	LENGTH	QTY
B1	#5	9 in (0'-9")	4 pcs
B2	#5	8 in (0'-8")	8 pcs
B3	#5	17 in (1'-5")	4 pcs
B4	#5	32 in (2'-8")	8 pcs
B5	#5	24 in (2'-0")	4 pcs
B6	#5	ø40 in (3'-4")	1 pcs

Total Pieces: 29 Pcs
Total Footage: 54.00 LF
Total Weight: 56.32 lbs (0.029 Tons)

TYP SPA = #5 BARS AT 6" C.C.E.W.

TOP VIEW

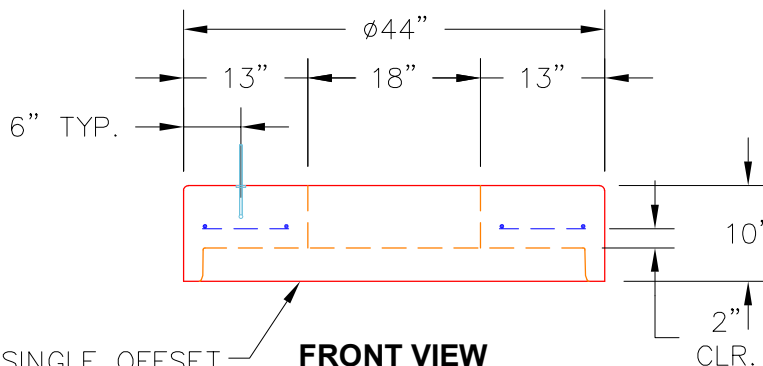

FRONT VIEW

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 4"

Height (Ext): 10"

Weight (Net): 730 lb
Volume (Net): 0.19cu.yd