

Job Name: 26-3632 ADS Wind Dance Farms Ph.2
Job Location: Fisherville, KY
Contractor: ADS Advanced Drainage Systems, Inc.

Plant: Beaver Dam
9/18/2026 8:52:44 AM

Tech: S. Felletter
PC: M. Sullivan



Structure ID: WQU 1

P2 MH060RSVF

MH RISER Custom Ht T/G

- P6) 24" - CASTING HEIGHT - 7"
P5) 24" - GRADE RING F/F - 4"
P4) 60" - MH FLAT TOP w/24" Ctr. Hole F/G - 13"
P3) 60" - MH RISER SPECIAL T/G - 60"
P2) 60" - MH RISER Custom Ht T/G - 40"
P1) 60" - MH BASE Custom Ht T/n - 20"

- 1) ASSEMBLY REQUIRED
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
1) CASTING - HOE MC-375 F/C Storm
3) 60" - Conseal CS-102 1.00" (Double)
2) 24" - Conseal CS-102 1.00" (Double)
2) Hole - 16



- 0 lb
270 lb
2674 lb
6013 lb
4176 lb
4821 lb
0 lb
0 lb
0 lb
271 lb
0 lb
0 lb
0 lb
Structure Notes: .
1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. CASTING BY ICAST (HOE MC-375 F/C "STORM").
4. LIFTING ANCHORS TO BE INSTALLED ON THE OUTSIDE OF THE STRUCTURE.
5. P2 & P3 RISERS TO BE MECHANICALLY ATTACHED PRIOR TO INTERNAL INSTALLATION/DELIVERY.
REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- RISER/WALLS (As .18)
- FLOOR (As .37) #5 BARS AT 10" C.C.E.W.

Structure Total: 18225 lb


Rim: 698.7' Rim to Invert: 5.3' Slack: 0.6" Sump: 81" Step Position: 0°

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

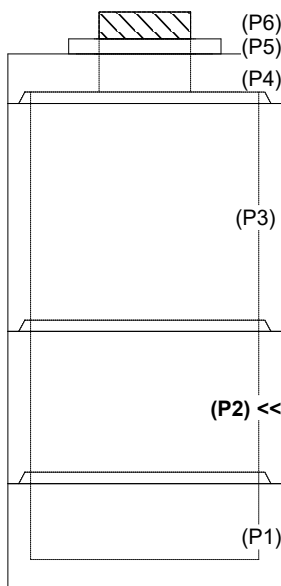

INSIDE WALL DIMENSIONS

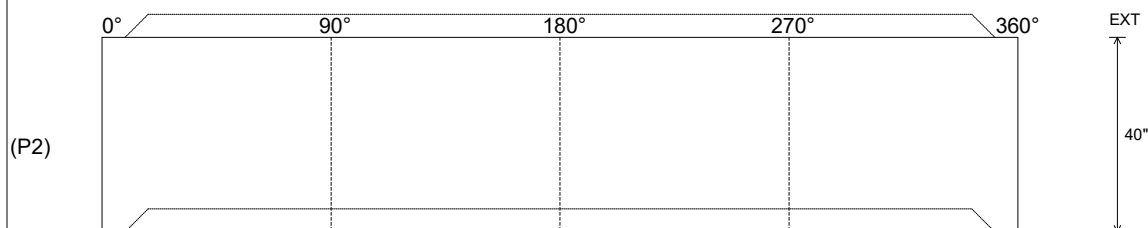

Coating (Int): Seam Up: Tongue Wall Thickness: 6" Height (Int): 40" Weight (Net): 4176 lb
Coating (Ext): Seam Dn: Groove Floor Height: 0" Height (Ext): 40" Volume (Net): 1.07cu.yd