

Structure ID: 1 - 1

P2 BX4848-08W08TVH-MT

BX MONOTOP 8"W/8"T (FB) w/36" Hole F/G

P3) 36" - CASTING HEIGHT - 9"
P2) 48" x 48" - BX MONOTOP 8"W/8"T (FB) w/36" Hole F/G - 24"
P1) 48" x 48" - BOX Base 8inW, 8inF, Variable Ht T/n - 24"
1) CASTING - HOE MC-780 F/C ELECTRIC
1) 48" x 48" - Conseal CS-102 1.00" (Double)
1) 36" - Conseal CS-102 1.00" (Double)
8) 24" x 11" - KO PANEL - 6" THICK n/n - 24" X 11"


	0 lb
	5035 lb
	5732 lb
	675 lb
	0 lb
	0 lb
	0 lb
Structure Total:	<u>11442 lb</u>

Structure Notes:

1. PER ASTM C913 SPECIFICATIONS.
2. CONCRETE = 5,000 PSI AT 28 DAYS.
3. CASTING BY ICAST (HOE MC-780 F/C ELECTRIC).
4. PULL IRONS, GROUND INSERT AND PLASTIC SUMP w/ COVER BY ICAST.
5. CABLE RACKS & WALL ANCHORS PROVIDED BY OTHERS.


REINFORCING PER ASTM A615 (GRADE 60).
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
 - WALLS (As .12) #5 BARS AT 8" C.C.E.W.
 - FLOOR OR BTM SLAB (As .12) #5 BARS AT 6" C.C.E.W.

Rim: 5.42' Rim to Invert: 4.59' Slack: 0.04" Sump: 9.96" Step Position:

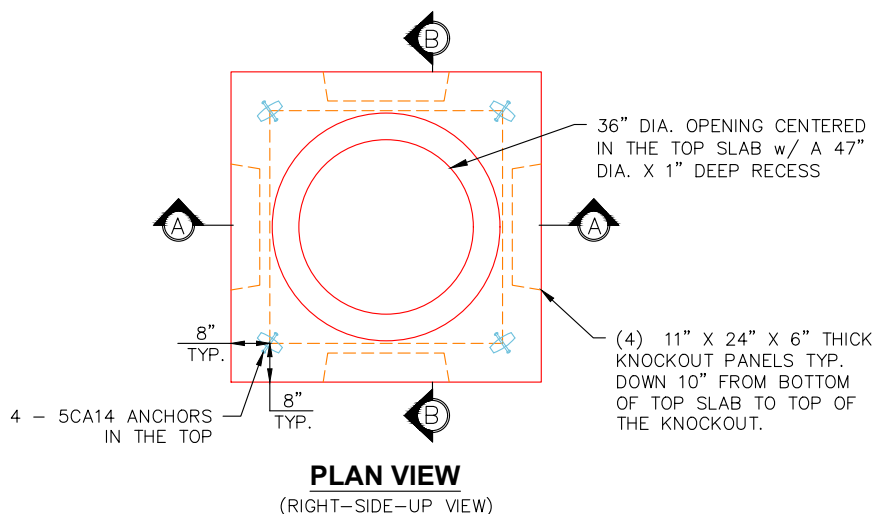


GENERAL NOTES:

- GENERAL NOTES:
1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
 2. CONCRETE: 5,000 PSI AT 28 DAYS.
 3. REINFORCING AS PER ASTM 615: (GRADE 60) -
2" MIN. REBAR CLEARANCE (TYP)
WALLS - #5 BAR @ 8" E.W. O.C.
TOP SLAB - #5 BAR @ 6" E.W.O.C
 4. WEIGHT: 32" MONOTOP - 5.035 LBS

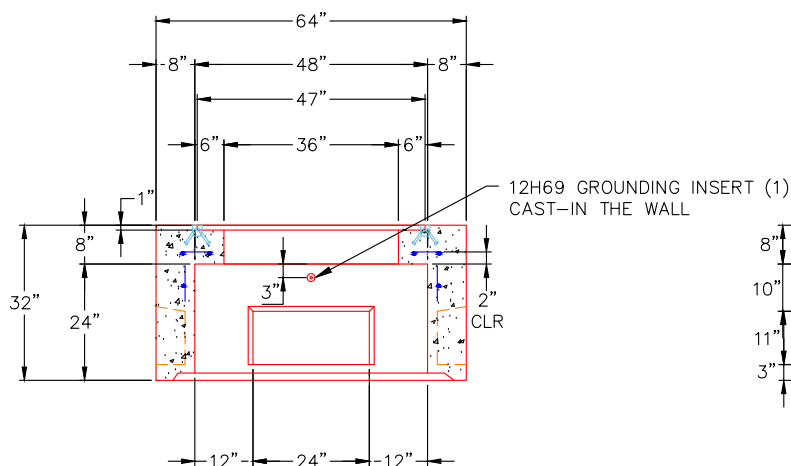

SECTION A-A
(RIGHT-SIDE-UP VIEW)

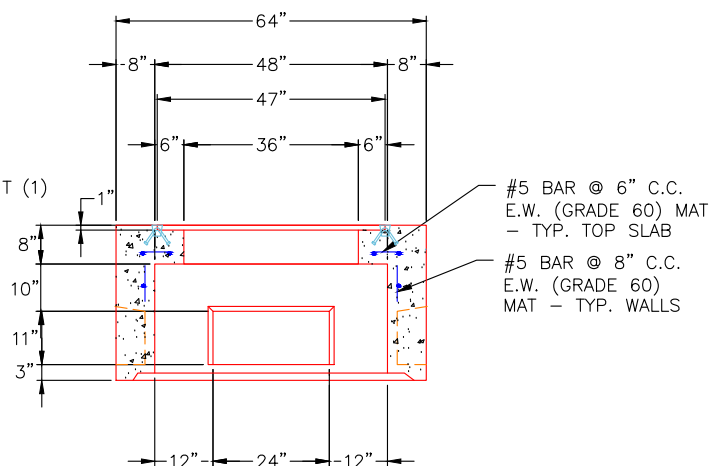

SECTION B-B
(RIGHT-SIDE-UP VIEW)

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 8"
Floor Height: 8"

Height (Int): 24"
Height (Ext): 32"

Weight (Net): 5035 lb
Volume (Net): 1.27cu.yd