

THIS DRAWING IS INTENDED TO BE PRINTED IN COLOR.

REBAR TAKEOFF


BAR | SIZE | LENGTH | QTY | SHAPE

B1	#5	45 in (3'-9")	4 pcs	STR
B2	#5	34 in (2'-10")	4 pcs	STR
B3	#5	13 in (1'-1")	8 pcs	STR
B4	#5	15 in (1'-3")	8 pcs	STR
B5	#5	24 in (2'-0")	4 pcs	DIAG
B6	#5	182 in (15'-2")	1 pcs	CIRC


Total Pieces: 29 Pcs

Total Footage: 68.04 LF

Total Weight: 70.97 lbs (0.036 Tons)

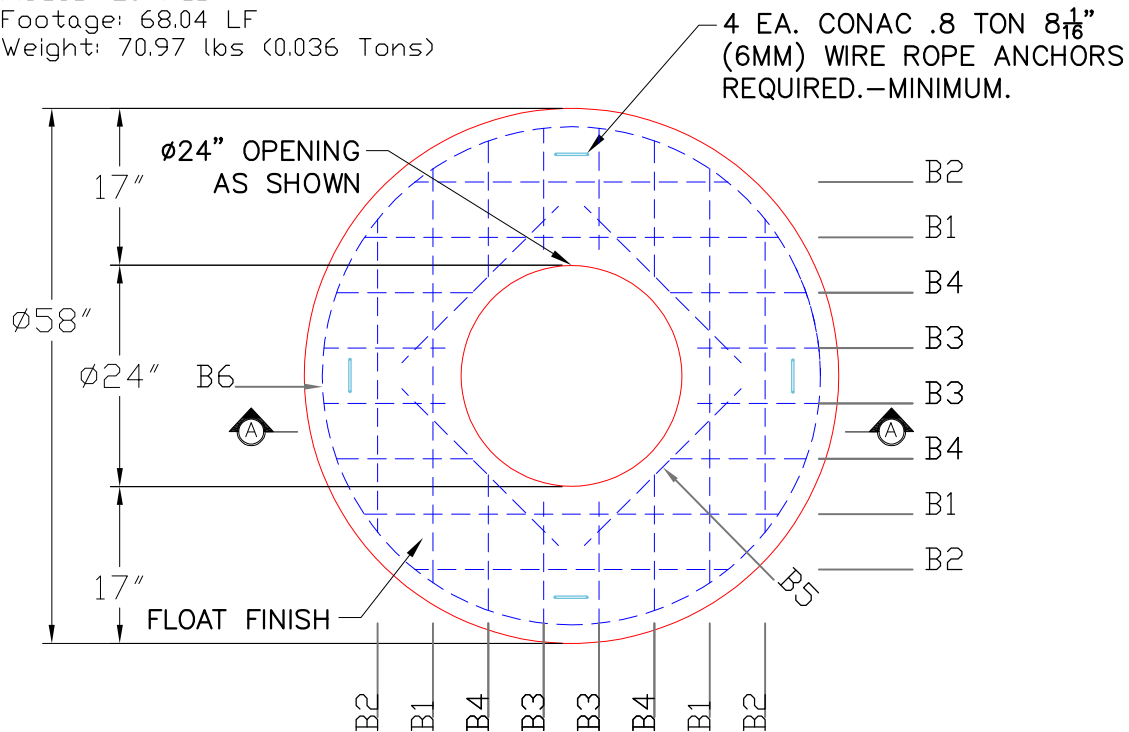

TOP VIEW

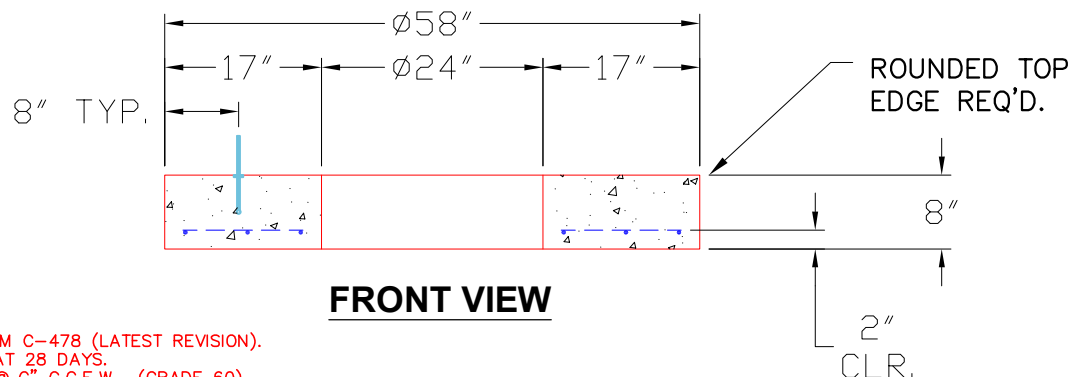

FRONT VIEW

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 5,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ C" C.C.E.W. (GRADE 60).

PRODUCTION WORK ORDER

PRODUCT I.D.:
MH048LD08SP

DESCRIPTION: 48"Ø X 8" MH TOP SLAB
W/ Ø24" CONCENTRIC OPENING



QUALITY CONTROL CHECKLIST

- ☐ ALL DIMENSIONS CORRECT.
- ☐ LIFTERS INSTALLED.
- ☐ HOLE LOCATION CORRECT.
- ☐ REINFORCING CORRECT.
- ☐ FINISH ON SLAB SURFACE UNIFORM.
- ☐ OUTSIDE TOP EDGE TROWELLED.
- ☐ FLAT BOTTOM.

PRODUCT VIEW: RIGHT SIDE UP

PLANT: BEAVER DAM, KY.

WEIGHT: 1,470 LBS.

TOP SECTION JOINT: N/A

BASE SECTION JOINT: FLAT

QC CHECK INITIALS:

CUSTOMER: ADS ADVANCED DRAINAGE SYSTEMS, INC.

PROJECT: ADS 7 BREW MADISON ST

STRUCTURE: 1

QUOTE/SALES ORDER NO: 26-3719

PC: M. SULLIVAN

DRAWING: S. FELLETER

DATE: 09/25/26

SCALE: NTS

PG. 1 of 1