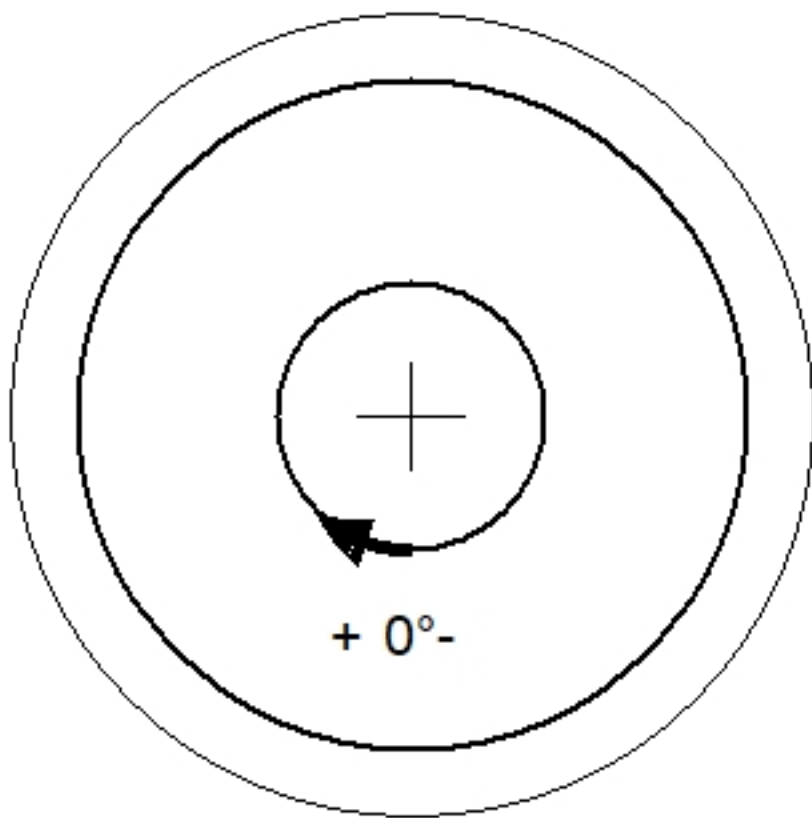
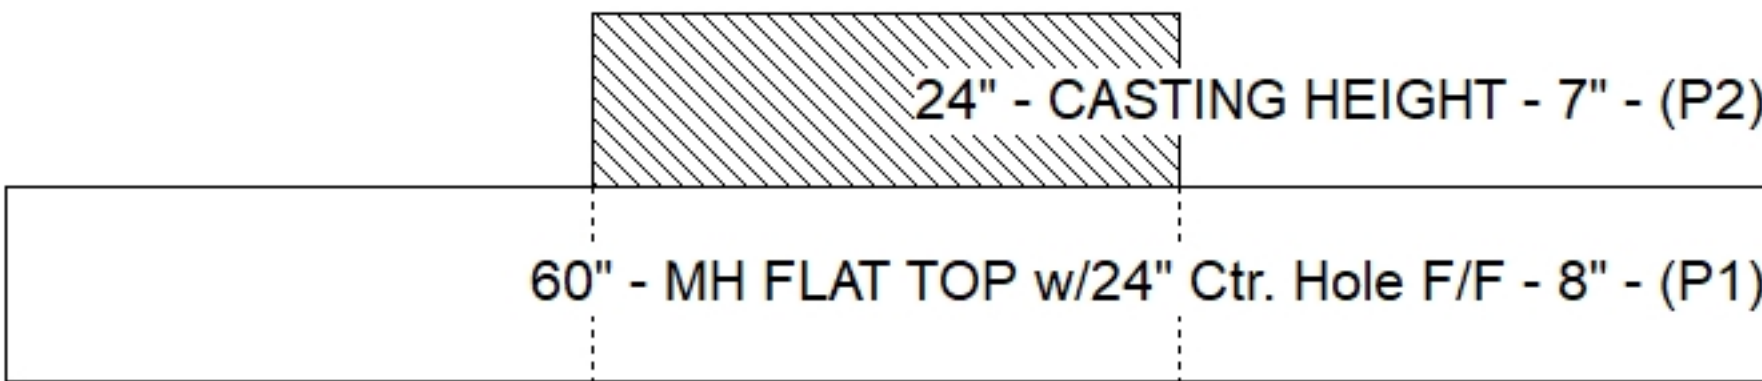


Job Name: 26-3772 ADS Davis Jewelers Job Location: Louisville, KY Contractor: ADS Advanced Drainage Systems, Inc.					PC: M. Sullivan TECH: S. Felletter Plant: Beaver Dam									
Structure ID: 2 Spec: Storm-Pipe Centered Type: STM.MH Size: 60"					Rim: 1.25' Invert: 1.25' Rim to Invert: 0'		Sump: 0" Floor (Top): 0' Floor Height: 0"		Floor (Bot): 0' Overall Height: 1.25' Slack: 0"					
Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .18) - FLOOR (As .37) #5 BARS AT 10" C.C.E.W.					STRUCTURE SUMMARY: P2) 24" - CASTING HEIGHT - 7" P1) 60" - MH FLAT TOP w/24" Ctr. Hole F/F - 8" 1) CASTING - HOE MC-375 F/C Storm 1) 24" - Conseal CS-102 1.00" 0 lb 2429 lb 271 lb 0 lb ----- Structure Total: 2700 lb									
					Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up ()	Ref	
					Rim	1.25'								
					Reducer									
					Invert 1									
					Invert 2									
					Invert 3									
					Invert 4									
					Invert 5									
					Invert 6									
					Invert 7									
Invert 8														
					Default - Interior Dimensions									
					(P1) 0° 90° 180° 270° 360° EXT 8"									
Submittal Drawing 10/9/2026 1:29:05 PM					SUBMITTAL APPROVED BY:									