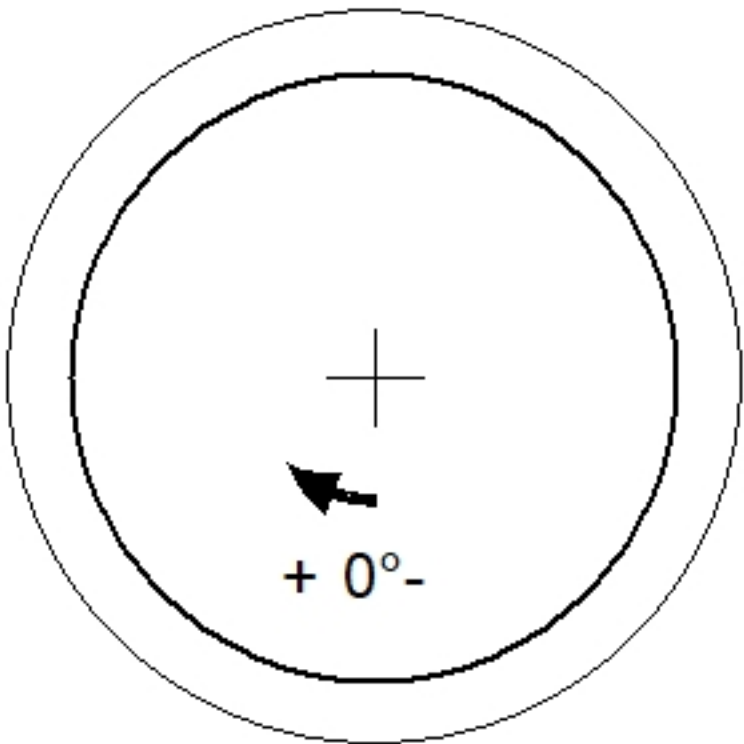
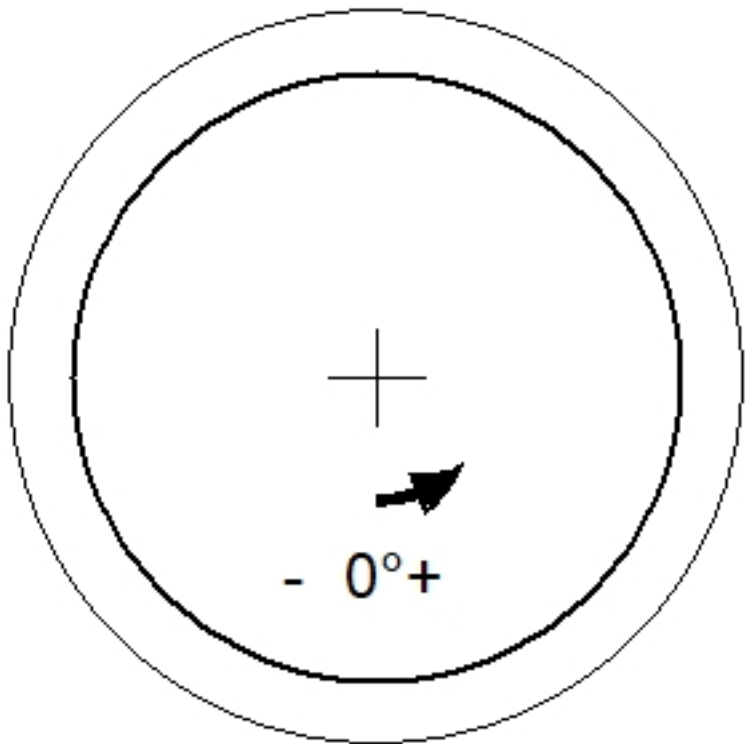
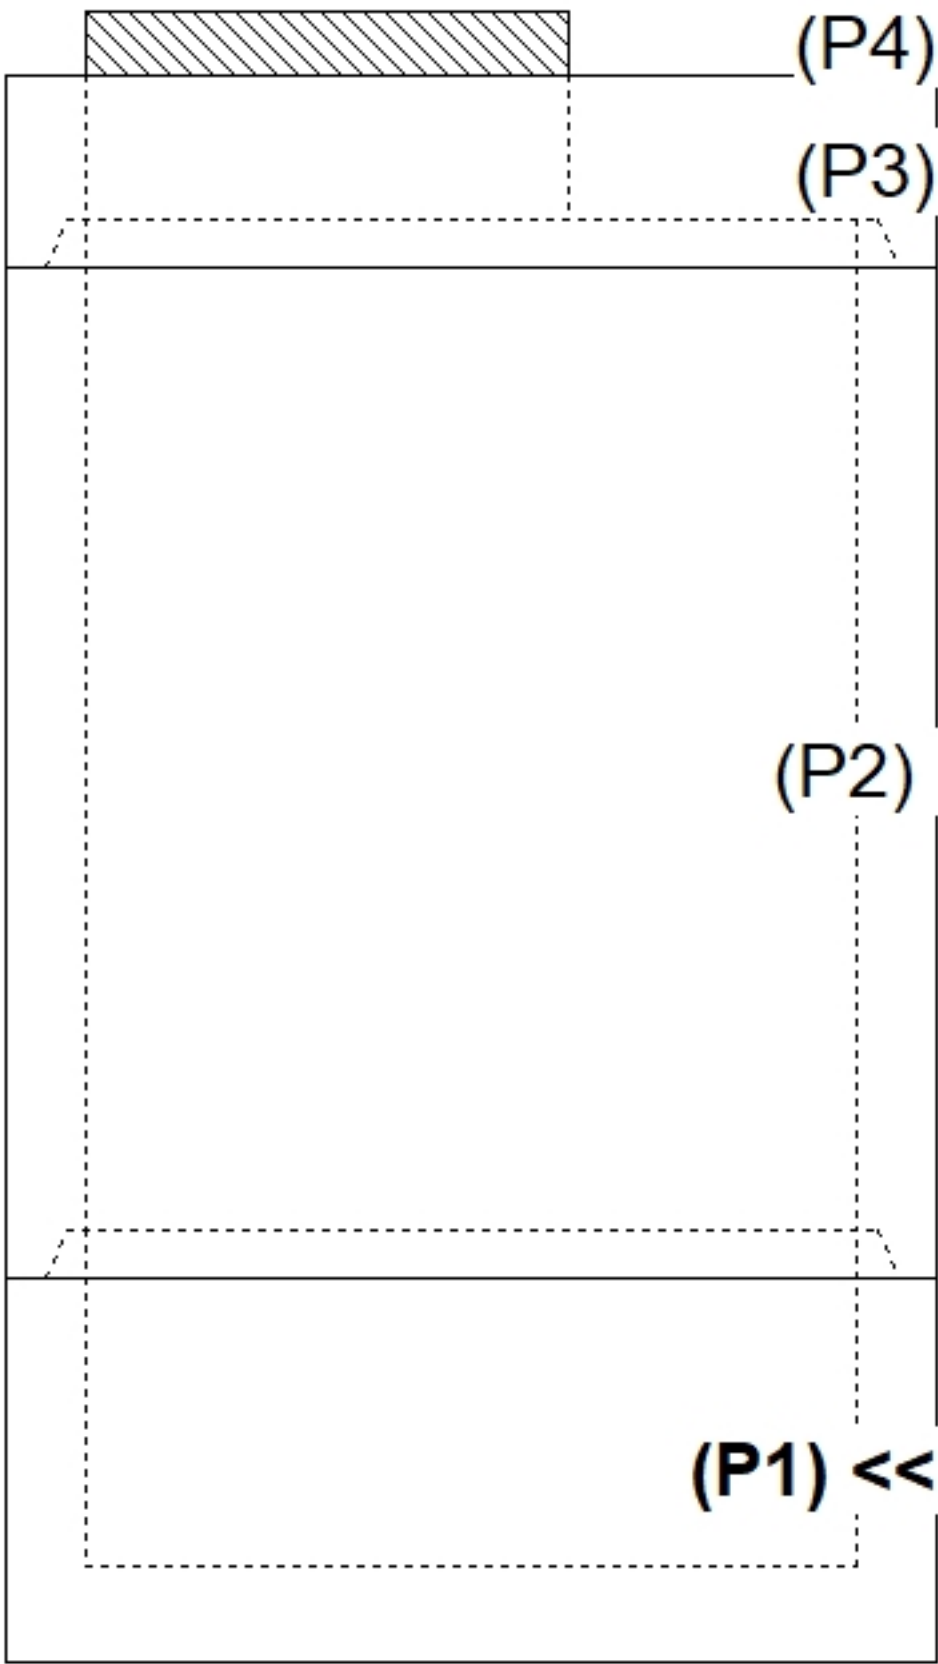
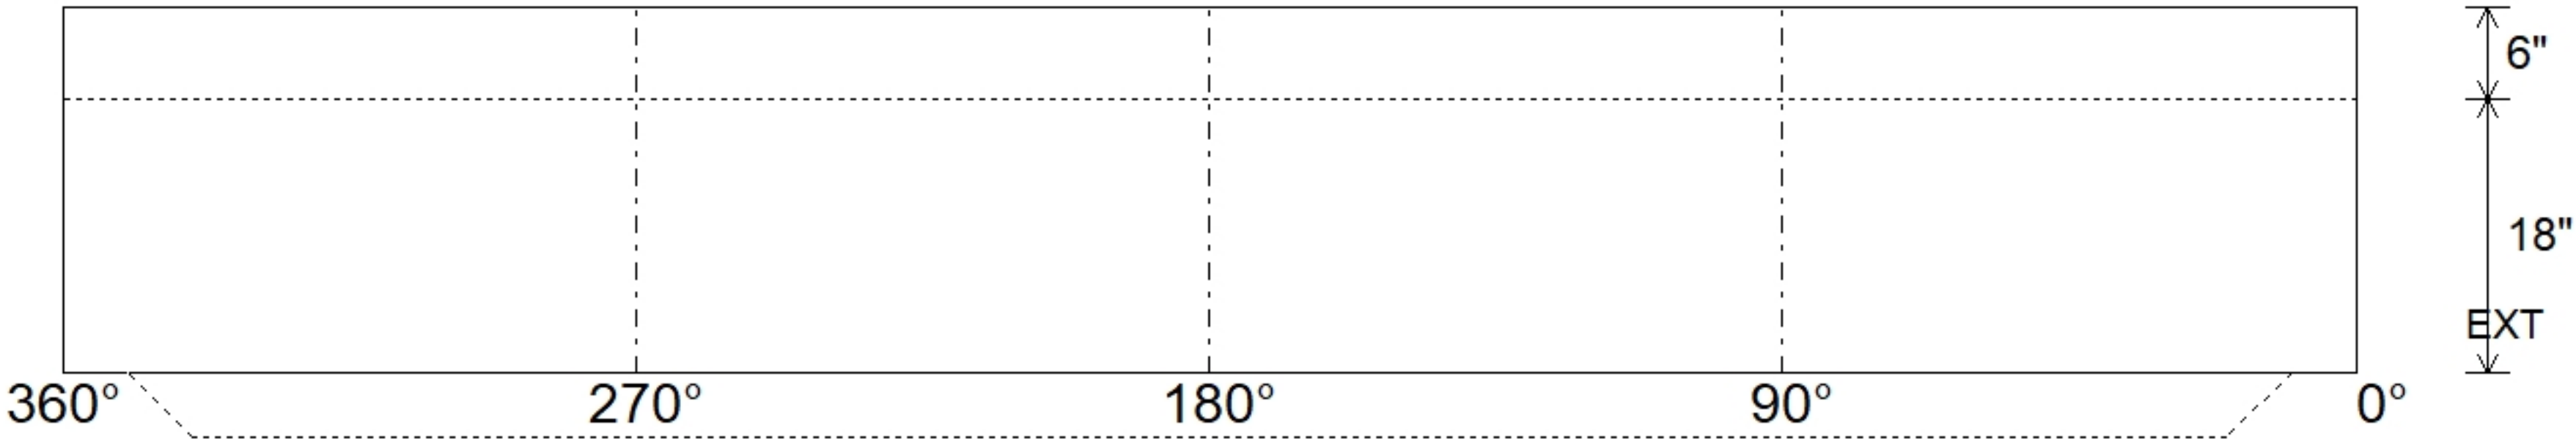


Job Name: 26-3785 863858 Bardstown High School					Plant: Beaver Dam		Tech: S. Felletter				
Job Location: Bardstown, KY					9/29/2026 1:17:15 PM		PC: C. Goff				
Contractor: Contech Engineering Solutions											
Structure ID: 10-CS-4											
P1		MH048BA18			MH BASE T/n						
P4) 30" - CASTING HEIGHT - 4" P3) 48" - MH FLAT LID w/30in ECC Hole F/G - 12" P2) 48" - MH RISER Custom Ht T/G - 63" P1) 48" - MH BASE T/n - 18" 1) ASSEMBLY REQUIRED 1) CVSTENCILING 2) 48" - Conseal CS-102 1.00" 2) Hole - 20 1) Hole - 12					0 lb 1413 lb 4083 lb 2588 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 8084 lb		Structure Notes: 4" CASTING BY OTHERS . LIFTING ANCHORS TO BE INSTALLED ON THE OUTSIDE OF THE STRUCTURE . ICAST TO INSTALL THE INTERNALS . CONTECH'S LOGO AS WELL AS THE INLET AND OUTLET MUST BE STENCILED ONTO THE STRUCTURE				
Rim: 639.63' Rim to Invert: 3.87' Slack: 0.44" Sump: 51" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (⌋)	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)  UPSIDE-DOWN VIEW (int. dimenions) 											
					INSIDE WALL DIMENSIONS (P1) 						
Coating (Int):			Seam Up: Tongue		Wall Thickness: 5"		Height (Int): 18"		Weight (Net): 2588 lb		
Coating (Ext):			Seam Dn: n/a		Floor Height: 6"		Height (Ext): 24"		Volume (Net): 0.66cu.yd		